




# PROBLEM SUMMARY

Sample Rating Trend

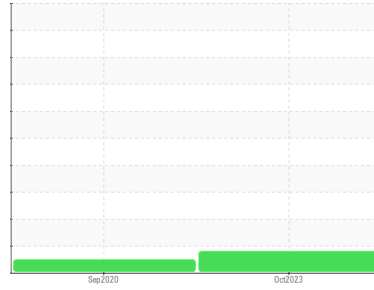

**WEAR**



Machine Id

## CALL ME CURLY

Component


**Port Main Engine**

Fluid


**SHELL ROTELLA T4 15W40 (20 LTR)**

### COMPONENT CONDITION SUMMARY

#### ▲ Ferrous Alloys

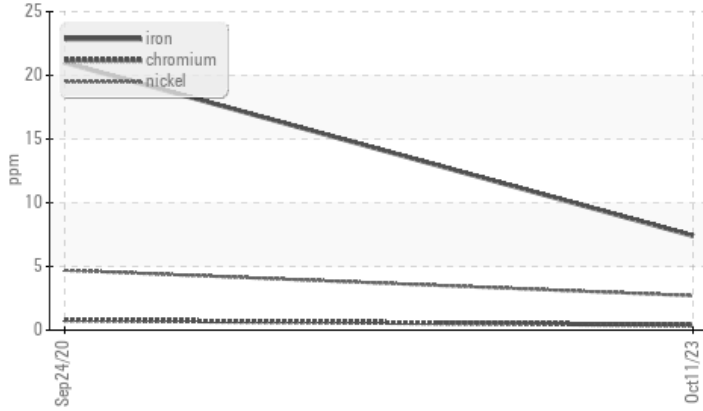

#### Additives

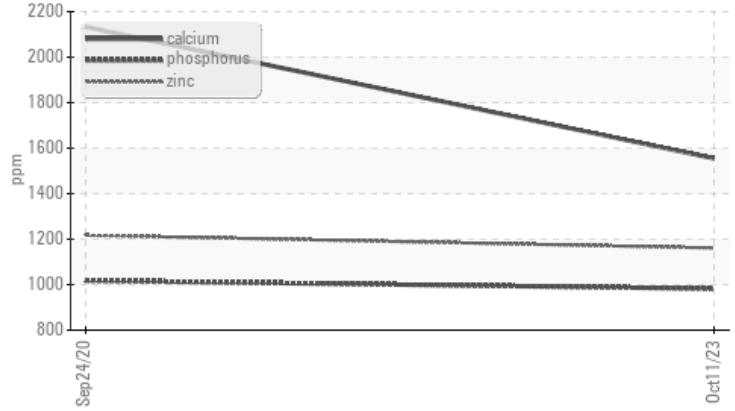

### RECOMMENDATION

We recommend that you change the oil at the next available stoppage or outage. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

### PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	---	
Nickel	ppm	ASTM D5185(m) >2	▲ 3	5	---

Customer Id: GRACAN  
 Sample No.: WC0870441  
 Lab Number: 02589121  
 Test Package: MAR 1



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you change the oil at the next available stoppage or outage.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fluid Source	---	---	?	Confirm the source of the lubricant being utilized for top-up/fill.

## HISTORICAL DIAGNOSIS

24 Sep 2020 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report





# OIL ANALYSIS REPORT

Sample Rating Trend


**WEAR**



Machine Id  
**CALL ME CURLY**

Component  
**Port Main Engine**

Fluid  
**SHELL ROTELLA T4 15W40 (20 LTR)**

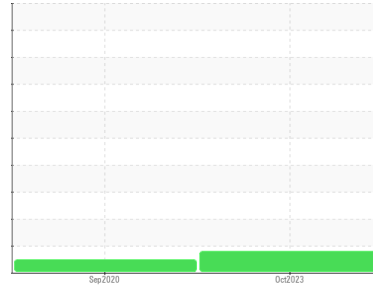

## DIAGNOSIS

### ▲ Recommendation

We recommend that you change the oil at the next available stoppage or outage. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

### ▲ Wear

Nickel ppm levels are abnormal. Exhaust valve wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0870441</b>	WC0510801	---
Sample Date	Client Info		<b>11 Oct 2023</b>	24 Sep 2020	---
Machine Age	hrs	Client Info	<b>1671</b>	674	---
Oil Age	hrs	Client Info	<b>186</b>	140	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	<b>7</b>	21	---
Chromium	ppm	ASTM D5185(m)	>8	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<b>▲ 3</b>	5	---
Titanium	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>15	<b>1</b>	1	---
Lead	ppm	ASTM D5185(m)	>18	<b>3</b>	4	---
Copper	ppm	ASTM D5185(m)	>80	<b>13</b>	26	---
Tin	ppm	ASTM D5185(m)	>14	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>40</b>	127	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185(m)		<b>43</b>	13	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m)		<b>494</b>	167	---
Calcium	ppm	ASTM D5185(m)		<b>1555</b>	2133	---
Phosphorus	ppm	ASTM D5185(m)		<b>982</b>	1018	---
Zinc	ppm	ASTM D5185(m)		<b>1161</b>	1217	---
Sulfur	ppm	ASTM D5185(m)		<b>2509</b>	2927	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>5</b>	4	---
Sodium	ppm	ASTM D5185(m)	>75	<b>3</b>	1	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	6	---

## INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0.2</b>	0.5	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.4</b>	7.8	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.0</b>	22.0	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.9</b>	17.3	---






# OIL ANALYSIS REPORT

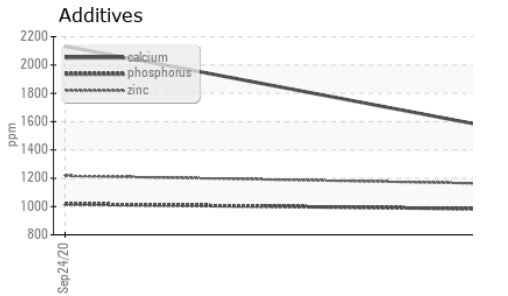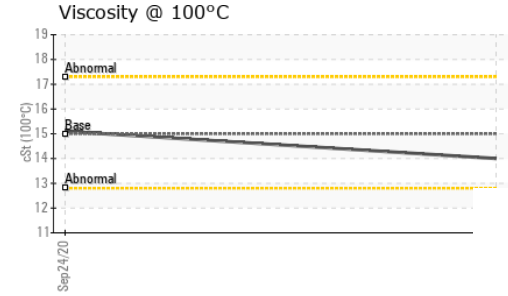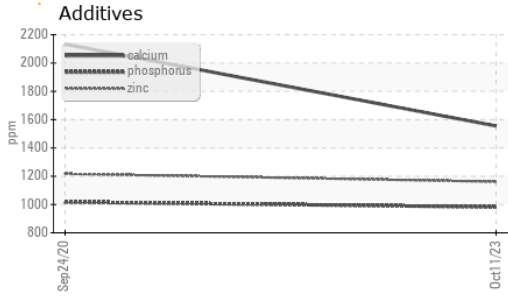

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15	14.0	15.1

### GRAPHS

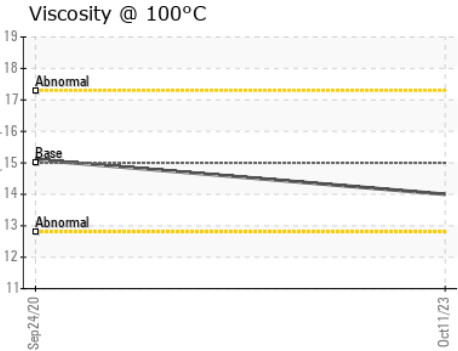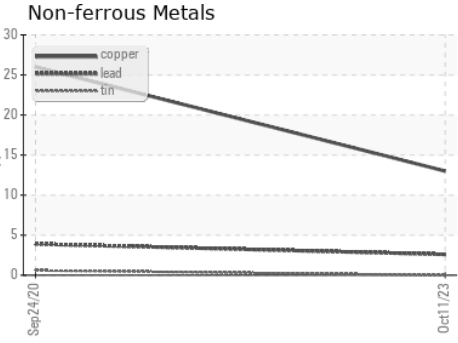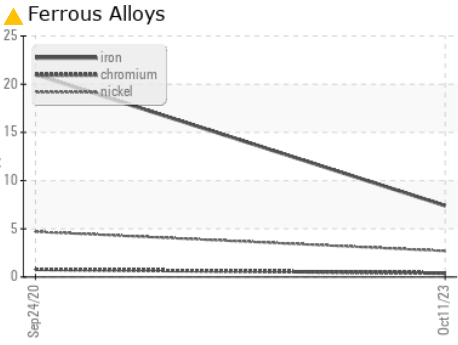

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0870441      **Received** : 16 Oct 2023  
**Lab Number** : 02589121      **Diagnosed** : 16 Oct 2023  
**Unique Number** : 5658187      **Diagnostician** : Kevin Marson  
**Test Package** : MAR 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**GRANT EAGLE**  
 2299 MARINE DRIVE, UNIT 12  
 OAKVILLE, ON  
 CA L6L 1C2  
 Contact: Grant Eagle  
 ge-at-mb@live.com  
 T: (518)504-1782  
 F: