




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

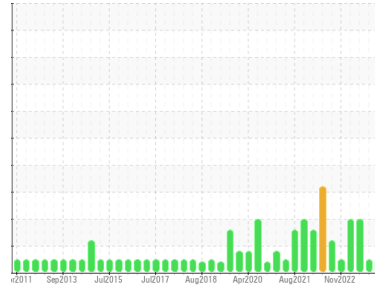

Area
System 33 - Gas Compression [01954098]
 Machine Id
Z-3300 1ST STAGE GAS COMPRESSOR LUBE OIL (S/N F-3305)
 Component
Hydraulic System
 Fluid
IRVING HYDRAULIC OIL LP 32 (2195 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PP	PP	PP
Sample Date	Client Info	24 Sep 2023	16 Apr 2023	07 Mar 2023
Machine Age	hrs Client Info	0	0	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	0	0
Iron	ppm ASTM D5185(m) >20	2	<1	1
Chromium	ppm ASTM D5185(m) >10	0	0	0
Nickel	ppm ASTM D5185(m) >10	<1	<1	<1
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	<1	0	0
Aluminum	ppm ASTM D5185(m) >10	0	0	0
Lead	ppm ASTM D5185(m) >20	<1	<1	<1
Copper	ppm ASTM D5185(m) >20	<1	0	<1
Tin	ppm ASTM D5185(m) >10	0	<1	0
Antimony	ppm ASTM D5185(m)	0	<1	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<1	<1	<1
Barium	ppm ASTM D5185(m)	<1	0	0
Molybdenum	ppm ASTM D5185(m)	0	0	0
Manganese	ppm ASTM D5185(m)	0	0	0
Magnesium	ppm ASTM D5185(m)	0	0	<1
Calcium	ppm ASTM D5185(m)	51	54	53
Phosphorus	ppm ASTM D5185(m)	333	365	364
Zinc	ppm ASTM D5185(m) 400	409	414	415
Sulfur	ppm ASTM D5185(m)	1070	1152	1136
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<1	<1	<1
Sodium	ppm ASTM D5185(m)	<1	0	1
Potassium	ppm ASTM D5185(m) >20	0	<1	<1
Water	% ASTM D6304* >0.05	0.001	0.002	0.002
ppm Water	ppm ASTM D6304* >500	10.4	16.7	20.0

INFRA-RED






method	limit/base	current	history1	history2
Soot %	% ASTM D7844*	0	0	0
Nitration	Abs/cm ASTM D7624*	2.0	2.1	2.4
Sulfation	Abs/.1mm ASTM D7415*	23.6	23.9	25.8

Particle Filter (Magn: 200 x)





OIL ANALYSIS REPORT

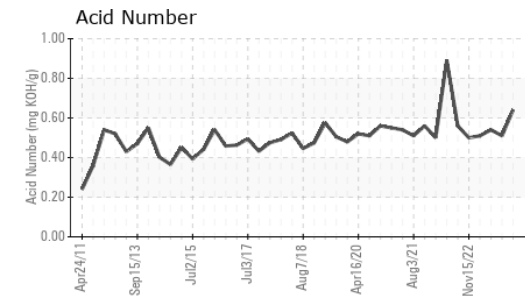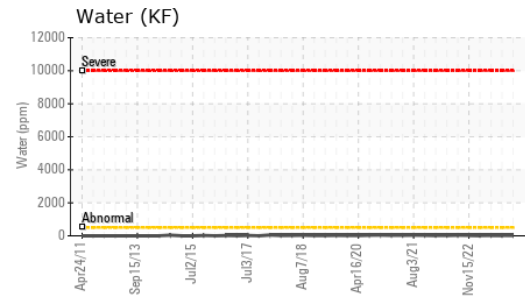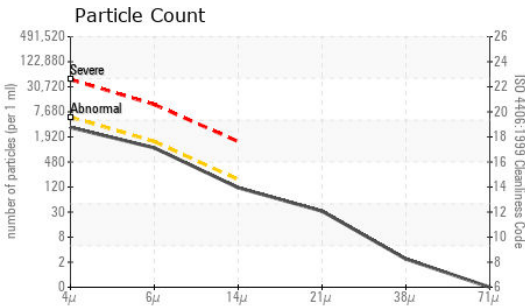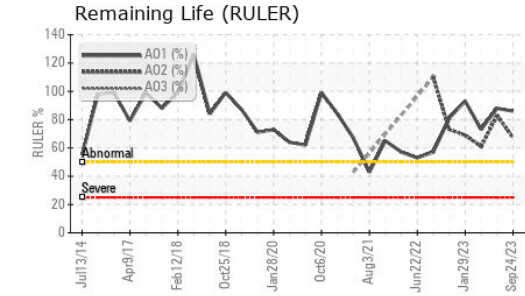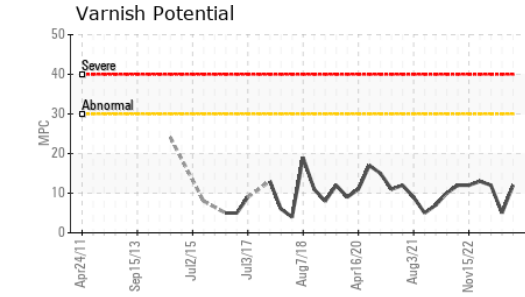

Laboratory Sample No.
Lab Number
Unique Number : 5658359
Test Package : AOM 2 (Additional Tests: Bottom, BottomAnalysis, COC Flash, FilterPatch, PntInsol, PrtFilter)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	2827	2477	▲ 14277
Particles >6µm	ASTM D7647	>1300	920	797	▲ 4623
Particles >14µm	ASTM D7647	>160	102	64	▲ 436
Particles >21µm	ASTM D7647	>40	28	27	▲ 121
Particles >38µm	ASTM D7647	>10	2	3	4
Particles >71µm	ASTM D7647	>3	0	1	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	19/17/14	18/17/13	▲ 21/19/16


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm ASTM D7414*		14.7	15.1	14.7
Acid Number (AN)	mg KOH/g ASTM D974*		0.64	0.51	0.54
Anti-Oxidant 1	% ASTM D6971*	<25	86	88	73
Anti-Oxidant 2	% ASTM D6971*	<25	67	83	61
MPC Varnish Potential	Scale ASTM D7843(m)*	>15	12	5	12

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	NONE	NONE	NONE
Debris	scalar Visual*	NONE	LIGHT	VLITE	NONE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	31.9	31.4	31.5	31.4
Visc @ 100°C	cSt ASTM D7279(m)	6.4	6.2	6.2	6.2
Viscosity Index (VI)	Scale ASTM D2270*	151	150	150	150
COC Flash Point	°C ASTM D92*	194	---	---	220

SEDIMENT	method	limit/base	current	history1	history2
Pentane Insolubles	% ASTM D893(m)*		0.035	0.035	0.046

SAMPLE IMAGES



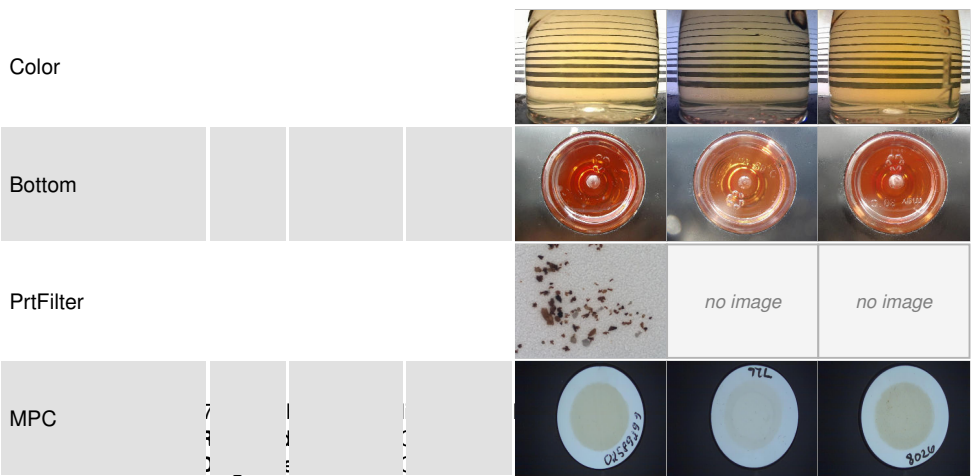


Diagnostician : Bill Quesnel
Contact : Christopher Michelau
 christopher.j.michelau@exxonmobil.com
 CA A1C 6K3
 T:
 F: (709)722-3766



FERROGRAPHY REPORT

Area
System 33 - Gas Compression [01954098]
 Machine Id
Z-3300 1ST STAGE GAS COMPRESSOR LUBE OIL (S/N F-3305)
 Component
Hydraulic System
 Fluid
IRVING HYDRAULIC OIL LP 32 (2195 GAL)

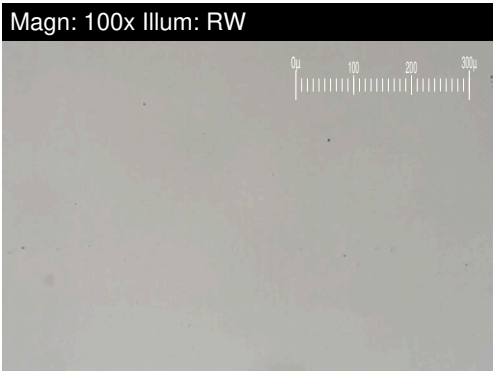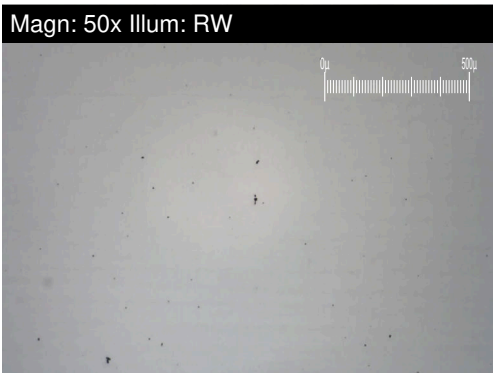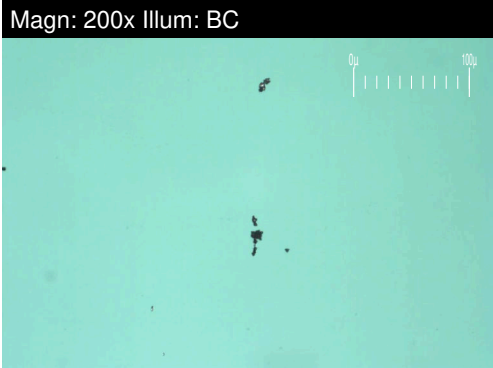



DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		0.6	2.8	7.0
Small Particles		DR-Ferr*		0.4	2.8	6.9
Total Particles		DR-Ferr*	>---	1	5.6	13.9
Large Particles Percentage	%	DR-Ferr*		20	0	0.7
Severity Index		DR-Ferr*		0	0	1

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	1	2
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*				
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				1
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				1
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		2	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*				

WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

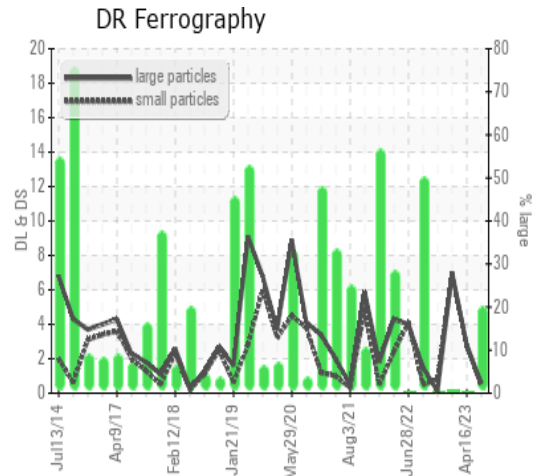

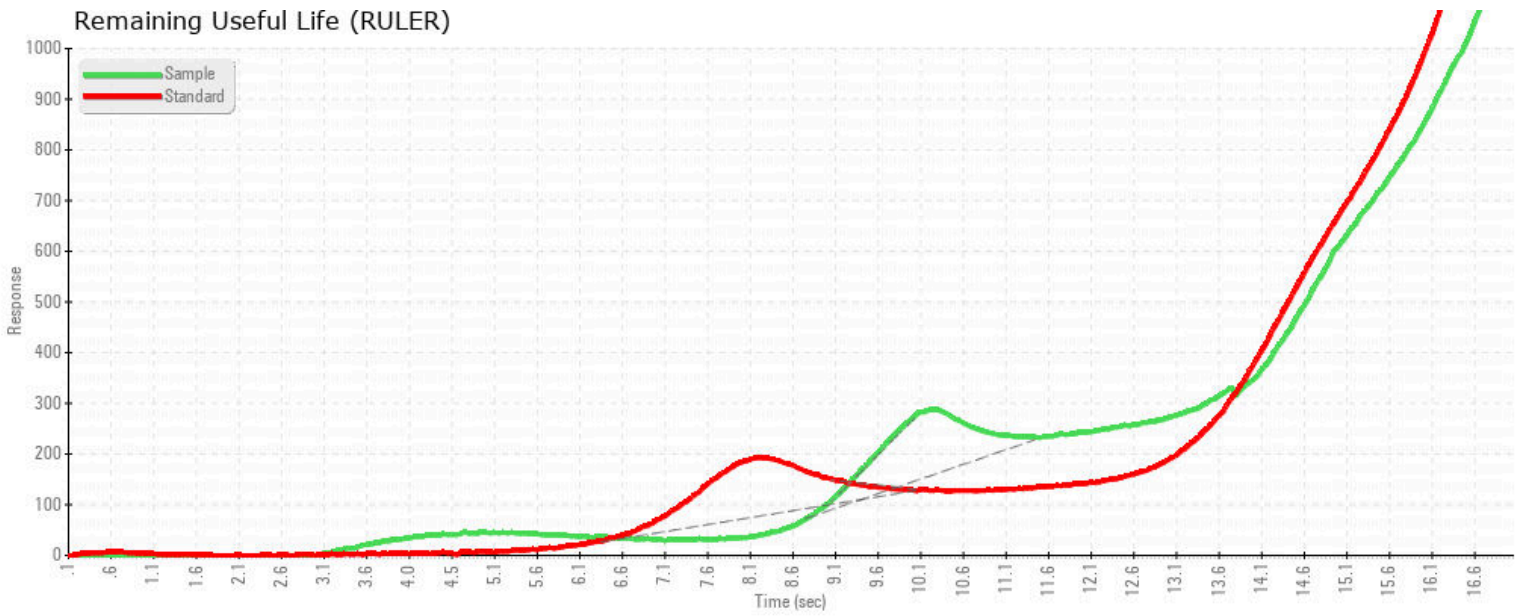

MPC (Varnish Test)



Sample Color & Clarity

