

# **OIL ANALYSIS REPORT**

#### Sample Rating Trend

## NORMAL

# QC230213IND2

#### Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 68 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




### p2023 Aug2023 Aug2023 Sep2023 Sep2023 Sep2023 Oct2023

	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0865583	WC0865580	WC0865579
Sample Date		Client Info		16 Oct 2023	13 Oct 2023	12 Oct 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	0	0
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	0	0	<1
Lead	ppm	ASTM D5185(m)	>20	0	0	0
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1	<1	<1
Barium	ppm	ASTM D5185(m)	5	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	5	0	0	0
M				0		
Manganese	ppm	ASTM D5185(m)		U	0	0
Magnesium	ppm ppm	ASTM D5185(m) ASTM D5185(m)	25	0	0	0
•		× /	25 200	-		
Magnesium	ppm	ASTM D5185(m)		0	0	0
Magnesium Calcium	ppm ppm	ASTM D5185(m) ASTM D5185(m)	200	0 42	0 43	0 43
Magnesium Calcium Phosphorus	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	200 300	0 42 336	0 43 332	0 43 341
Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	200 300 370	0 42 336 421	0 43 332 426	0 43 341 424
Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	200 300 370	0 42 336 421 682	0 43 332 426 688	0 43 341 424 688
Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	200 300 370 2500 limit/base	0 42 336 421 682 <1	0 43 332 426 688 <1	0 43 341 424 688 <1
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method	200 300 370 2500 limit/base >15	0 42 336 421 682 <1 current	0 43 332 426 688 <1 history1	0 43 341 424 688 <1 history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) <b>method</b> ASTM D5185(m)	200 300 370 2500 limit/base >15	0 42 336 421 682 <1 current 0	0 43 332 426 688 <1 history1 0	0 43 341 424 688 <1 history2 0
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	200 300 370 2500 limit/base >15	0 42 336 421 682 <1 <u>current</u> 0 <1	0 43 332 426 688 <1 history1 0 0	0 43 341 424 688 <1 history2 0 0
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	200 300 370 2500 limit/base >15 >20	0 42 336 421 682 <1 <u>current</u> 0 <1 0	0 43 332 426 688 <1 <b>history1</b> 0 0 <1	0 43 341 424 688 <1 history2 0 0 0 0
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D6304*	200 300 370 2500 imit/base >15 >20 >20	0 42 336 421 682 <1 <u>current</u> 0 <1 0 0 0.002	0 43 332 426 688 <1 <b>history1</b> 0 0 <1 0.002	0 43 341 424 688 <1 history2 0 0 0 0 0 0 0 0 0 0 0 0 0
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185(m) ASTM D6304*	200 300 370 2500 <b>limit/base</b> >15 >20 >0.05 >500	0 42 336 421 682 <1 <u>current</u> 0 <1 0 0.002 21.7	0 43 332 426 688 <1 history1 0 0 <1 0.002 21.5	0 43 341 424 688 <1 history2 0 0 0 0 0 0 0 0 0 0 0 18.6
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185(m) ASTM D6304* ASTM D6304	200 300 2500 imit/base >15 >20 >0.05 >500 imit/base	0 42 336 421 682 <1 <u>current</u> 0 <1 0 0 0.002 21.7 <u>current</u>	0 43 332 426 688 <1 <b>history1</b> 0 0 <1 0.002 21.5 <b>history1</b>	0 43 341 424 688 <1 history2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 8.6 history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D6304* ASTM D6304* ASTM D6304*	200 300 370 2500 Iimit/base >15 >20 >0.05 >500 Iimit/base >5000	0 42 336 421 682 <1 0 ( 1 0 ( 0 ( 1 0 0 0.002 21.7 21.7 21.7	0 43 332 426 688 <1 history1 0 0 <1 0.002 21.5 history1 86	0 43 341 424 688 <1 history2 0 0 0 0 0 0 0 0 0 0 0 0 0 1 8.6 history2 154
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185(m) ASTM D6304* ASTM D6304* ASTM D6304*	200 300 370 2500 <b>limit/base</b> >15 >20 >0.05 >500 <b>limit/base</b> >5000 >1300 >160	0 42 336 421 682 <1 0 ( 1 0 0 ( 1 0 0 0.002 21.7 21.7 21.7	0 43 332 426 688 <1 history1 0 0 <1 0.002 21.5 history1 86 32	0 43 341 424 688 <1 history2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 8.6 history2 1 57
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4μm Particles >14μm	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185(m) ASTM D6304* ASTM D6304* ASTM D6304* ASTM D7647 ASTM D7647 ASTM D7647	200 300 370 2500 <b>limit/base</b> >15 >20 >0.05 >500 <b>limit/base</b> >5000 >1300 >160	0 42 336 421 682 <1 0 ( 1 0 0 ( 1 0 0 0.002 21.7 21.7 73 24 4	0 43 332 426 688 <1 <b>history1</b> 0 0 <1 0.002 21.5 <b>history1</b> 86 32 6	0 43 341 424 688 <1 history2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 8.6 history2 1 57 8
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Vater ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185(m) ASTM D5047 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	200 300 370 2500 <b>limit/base</b> >15 >20 >0.05 >500 <b>limit/base</b> >5000 <b>limit/base</b> >5000 >1300 >160 >40	0 42 336 421 682 <1 0 <1 0 <1 0 0.002 21.7 73 24 4 2	0 43 332 426 688 <1 <b>history1</b> 0 0 <1 0.002 21.5 <b>history1</b> 86 32 6 2	0 43 341 424 688 <1 history2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0




# **OIL ANALYSIS REPORT**

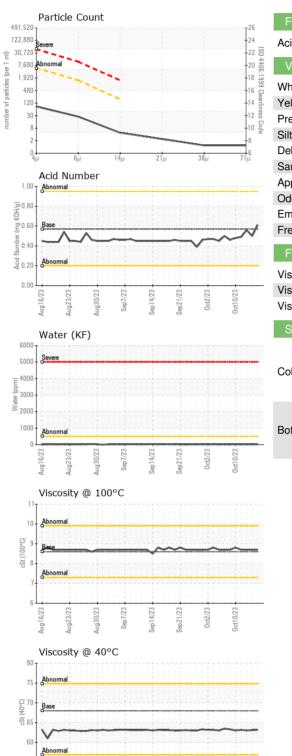

FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.61	0.50	0.56	
VISUAL		method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE	
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE	
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE	
Silt	scalar	Visual*	NONE	NONE	NONE	NONE	
Debris	scalar	Visual*	NONE	NONE	NONE	NONE	
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE	
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML	
Odor	scalar	Visual*	NORML	NORML	NORML	NORML	
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG	
Free Water	scalar	Visual*		NEG	NEG	NEG	
FLUID PROPERT	TIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	68	63.2	63.1	63.0	
Visc @ 100°C	cSt	ASTM D7279(m)	8.6	8.7	8.7	8.7	
Viscosity Index (VI)	Scale	ASTM D2270*	96	110	110	110	
SAMPLE IMAGES	S	method	limit/base	current	history1	history2	
				1582.			



## Bottom



Aug16/23	Sep14/23	0ct2/23				
	Test denoted (	*) outside scope	: WC0865583 : 02589303 : 5658369 : IND 2 ( Additional ontact Customer Ser	Received Diagnosed Diagnostician Tests: KF, KV100 rvice at 1-800-268 method modified,	: 16 Oct 2023 : 17 Oct 2023 : Wes Davis 0, TAN Man, VI ) 3-2131. (e) tested at externa	5H9 WearCheck Quality Control Sample Results Burlington, ON CA Contact: Dorian Anderson dorian.anderson@wearcheck.com I lab. T: (289)291-4652 F: (905)569-8605

55 Aug16/23

蓪

回影