


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



F6579 COMPRESSOR

Component

Compressor

AW HYDRAULIC OIL ISO 32 (--- GAL)

Fluid		
A 14/	LIVED	

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION							
Sample Number					Sep2023		
Sample Date	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Date Client Info 24 Sep 2023	Sample Number		Client Info		PP		
Oil Age hrs Client Info N/A Sample Status NORMAL NORMAL WEAR METALS method Imit/base current history1 history2 PQ ASTM D6184* 0 Iron ppm ASTM D6185(m) >50 0 Chromium ppm ASTM D6185(m) >5 0 Nickel ppm ASTM D6185(m) >5 0 Titanium ppm ASTM D6185(m) >15 0 Aluminum ppm ASTM D6185(m) >15 0 Lead ppm ASTM D6185(m) >65 <1			Client Info		24 Sep 2023		
Oil Changed Sample Status Client Info N/A	Machine Age	hrs	Client Info		0		
Sample Status	Oil Age	hrs	Client Info		0		
WEAR METALS method limit/base current history1 history2 PQ ASTM D61884* 0 Iron ppm ASTM D5185(m) >50 0 Chromium ppm ASTM D5185(m) >5 0 Nickel ppm ASTM D5185(m) >5 0 Titanium ppm ASTM D5185(m) >15 0 Aluminum ppm ASTM D5185(m) >15 0 Aluminum ppm ASTM D5185(m) >65 <1	Oil Changed		Client Info		N/A		
PQ	Sample Status				NORMAL		
Iron	WEAR METALS		method	limit/base	current	history1	history2
Chromium	PQ		ASTM D8184*		0		
Nickel	Iron	ppm	ASTM D5185(m)	>50	0		
Titanium	Chromium	ppm	ASTM D5185(m)	>5	0		
Silver	Nickel	ppm	ASTM D5185(m)		<1		
Aluminum	Titanium	ppm	ASTM D5185(m)		0		
Lead	Silver	ppm	ASTM D5185(m)		<1		
Copper ppm ASTM D5185(m) >65 <1 Tin ppm ASTM D5185(m) >10 0 Antimony ppm ASTM D5185(m) 0 Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 5 <1	Aluminum	ppm	ASTM D5185(m)	>15	0		
Tin ppm ASTM D5185(m) >10 0 Antimony ppm ASTM D5185(m) 0 Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 5 <1	Lead	ppm	ASTM D5185(m)	>65	<1		
Antimony ppm ASTM D5185(m) 0 Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 5 <1	Copper	ppm	ASTM D5185(m)	>65	<1		
Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 5 <1	Tin	ppm	ASTM D5185(m)	>10	0		
Beryllium	Antimony	ppm	ASTM D5185(m)		0		
Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 5 <1	Vanadium	ppm	ASTM D5185(m)		0		
ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 5 <1	Beryllium	ppm	ASTM D5185(m)		0		
Boron ppm ASTM D5185(m) 5 <1	Cadmium	ppm	ASTM D5185(m)		0		
Barium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185(m) 5 0 Manganese ppm ASTM D5185(m) 25 0 Magnesium ppm ASTM D5185(m) 25 0 Calcium ppm ASTM D5185(m) 200 34 Phosphorus ppm ASTM D5185(m) 300 335 Zinc ppm ASTM D5185(m) 370 418 Sulfur ppm ASTM D5185(m) 2500 1365 Lithium ppm ASTM D5185(m) 2500 1365 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 20 0 Potassium ppm ASTM	Boron	ppm	ASTM D5185(m)	5	<1		
Manganese ppm ASTM D5185(m) 0 Magnesium ppm ASTM D5185(m) 25 0 Calcium ppm ASTM D5185(m) 200 34 Phosphorus ppm ASTM D5185(m) 300 335 Zinc ppm ASTM D5185(m) 370 418 Sulfur ppm ASTM D5185(m) 2500 1365 Lithium ppm ASTM D5185(m) 21 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 22 Potassium ppm ASTM D6304* >0.1 0.004 Water % ASTM D6304* >1000 45.0	Barium	ppm	ASTM D5185(m)	5	<1		
Magnesium ppm ASTM D5185(m) 25 0 Calcium ppm ASTM D5185(m) 200 34 Phosphorus ppm ASTM D5185(m) 300 335 Zinc ppm ASTM D5185(m) 370 418 Sulfur ppm ASTM D5185(m) 2500 1365 Lithium ppm ASTM D5185(m) 21 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D6304* >0.1 0.004 Water % ASTM D6304* >1000 45.0	Molybdenum	ppm	ASTM D5185(m)	5	0		
Calcium ppm ASTM D5185(m) 200 34 Phosphorus ppm ASTM D5185(m) 300 335 Zinc ppm ASTM D5185(m) 370 418 Sulfur ppm ASTM D5185(m) 2500 1365 Lithium ppm ASTM D5185(m) <1	Manganese	ppm	ASTM D5185(m)		0		
Phosphorus ppm ASTM D5185(m) 300 335 Zinc ppm ASTM D5185(m) 370 418 Sulfur ppm ASTM D5185(m) 2500 1365 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm ASTM D6304* >1000 45.0	Magnesium	ppm	ASTM D5185(m)	25	0		
Zinc ppm ASTM D5185(m) 370 418 Sulfur ppm ASTM D5185(m) 2500 1365 Lithium ppm ASTM D5185(m) <1	Calcium	ppm	ASTM D5185(m)	200	34		
Sulfur ppm ASTM D5185(m) 2500 1365 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	Phosphorus	ppm	ASTM D5185(m)	300	335		
Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	Zinc	ppm	ASTM D5185(m)	370	418		
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	Sulfur	ppm	ASTM D5185(m)	2500	1365		
Silicon ppm ASTM D5185(m) >35 0 Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	Lithium	ppm	ASTM D5185(m)		<1		
Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	CONTAMINANTS	;	method	limit/base	current	history1	history2
Sodium ppm ASTM D5185(m) 2 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	Silicon	ppm	ASTM D5185(m)	>35	0		
Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	Sodium		ASTM D5185(m)		2		
Water % ASTM D6304* >0.1 0.004 ppm Water ppm ASTM D6304* >1000 45.0	Potassium		ASTM D5185(m)	>20	0		
	Water		ASTM D6304*	>0.1	0.004		
FLUID DEGRADATION method limit/base current history1 history2	ppm Water	ppm	ASTM D6304*	>1000	45.0		
	FLUID DEGRADA	ATION	method	limit/base	current	history1	history2


Acid Number (AN)

mg KOH/g ASTM D974* 0.57

0.65



OIL ANALYSIS REPORT

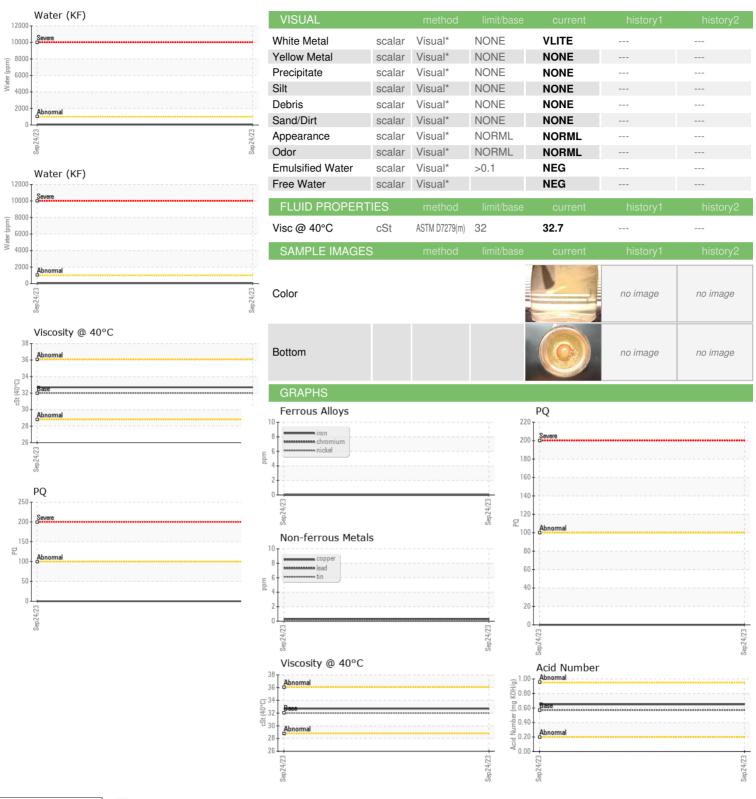



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: PP

02589322 : 5658388

Received Diagnosed

: 16 Oct 2023 : 17 Oct 2023 Diagnostician : Kevin Marson

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 HIBERNIA MGMT & DEVELOPMENT CO. LTD SUITE 1000,, 100 NEW GOWER STREET

ST.JOHNS, NL **CA A1C 6K3**

Test Package : MAR 2 (Additional Tests: KF, TAN Man) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Contact: Christopher Michelau christopher.j.michelau@exxonmobil.com

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T: F: (709)722-3766