

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

10576100 SKIP BEARING LUBE

Component

Bearing Lube

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within ISO 220 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		,		Oct2023	,	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0540539		
Sample Date		Client Info		08 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>120	<1		
Chromium	ppm	ASTM D5185(m)	>5	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>4	0		
Lead	ppm	ASTM D5185(m)	>30	3		
Copper	ppm	ASTM D5185(m)	>17	<1		
Tin	ppm	ASTM D5185(m)	>10	7		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		1		
Phosphorus	ppm	ASTM D5185(m)		288		
Zinc	ppm	ASTM D5185(m)		3		
Sulfur	ppm	ASTM D5185(m)		8781		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2


0.44

Acid Number (AN)

mg KOH/g ASTM D974*



OIL ANALYSIS REPORT

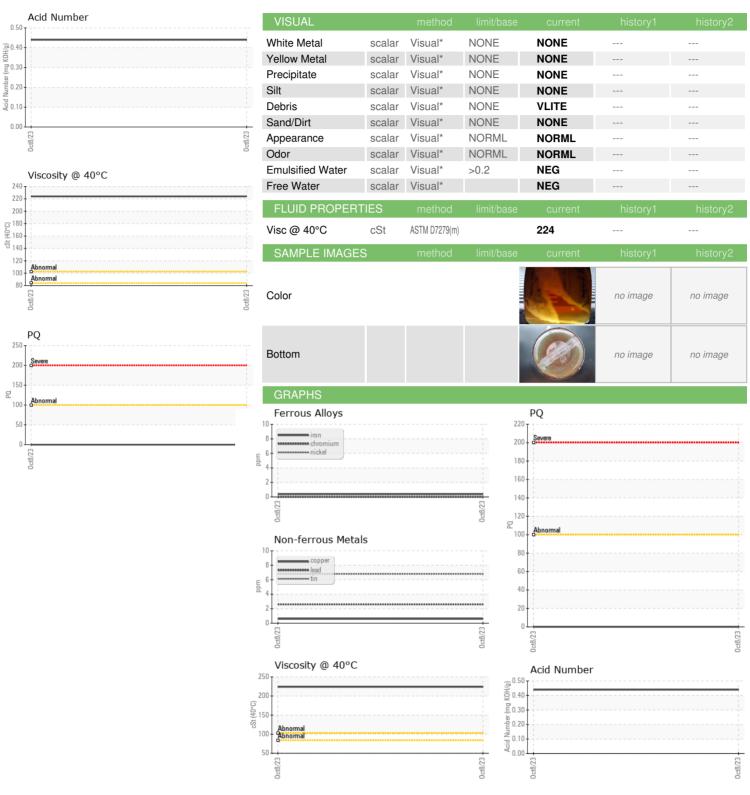



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: 02589394

: WC0540539 : 5658460

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 16 Oct 2023 Diagnosed Diagnostician

: 16 Oct 2023 : Kevin Marson Test Package : IND 2 (Additional Tests: TAN Man)

Vale - Creighton Mine CREIGHTON MINE MNTCE. (PLANT 17) COPPER CLIFF, ON CA P0M 1N0

Contact: Igor Bozhyk igor.bozhyk@vale.com T: (705)682-7009 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Igor Bozhyk - INCCRE