




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

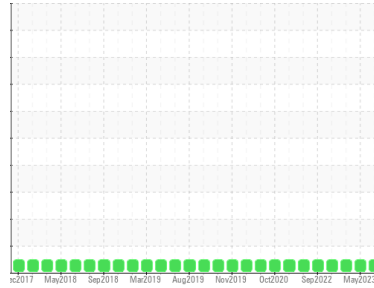

Area  
**(C-GYWN)**  
Machine Id  
**[C-GYWN] CESSNA C172N L-6371-76T**  
Component  
**Front Piston Aircraft Engine**  
Fluid  
**SHELL AEROSHELL W 15W50 MGR (2 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0827895</b>	WC0806811	WC0760304
Sample Date	Client Info		<b>15 Jun 2023</b>	05 May 2023	17 Jan 2023
TSN	hrs	Client Info	<b>0</b>	0	0
TSO	hrs	Client Info	<b>3811</b>	3711	3518
Oil Age	hrs	Client Info	<b>50</b>	50	50
Oil Changed		Client Info	<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	<b>10</b>	10	16
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185(m)	>15	<b>1</b>	1	1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>6</b>	5	8
Lead	ppm	ASTM D5185(m)	>20000	<b>3943</b>	4029	4280
Copper	ppm	ASTM D5185(m)	>25	<b>7</b>	6	12
Tin	ppm	ASTM D5185(m)	>30	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	5	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	10	<b>&lt;1</b>	1	<1
Calcium	ppm	ASTM D5185(m)	10	<b>6</b>	2	0
Phosphorus	ppm	ASTM D5185(m)	1280	<b>1126</b>	1155	1274
Zinc	ppm	ASTM D5185(m)	10	<b>6</b>	6	4
Sulfur	ppm	ASTM D5185(m)	1800	<b>1293</b>	1179	1130
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>3</b>	3	4
Sodium	ppm	ASTM D5185(m)		<b>1</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>4.9</b>	---	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>18.4</b>	---	---



# OIL ANALYSIS REPORT



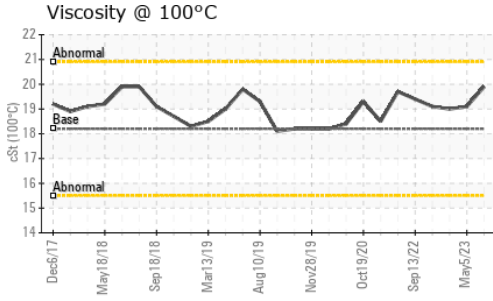


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm ASTM D7414*	>25	<b>12.3</b>	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar Visual*	NONE	<b>LIGHT</b>	VLITE	VLITE
Debris	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	18.2	<b>19.9</b>	19.1	19.0

## GRAPHS

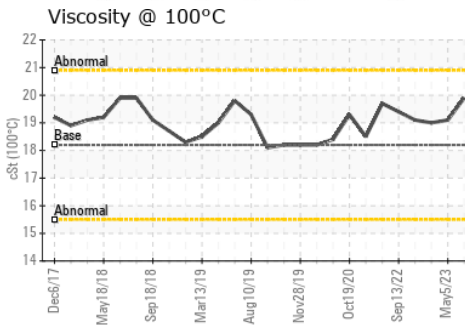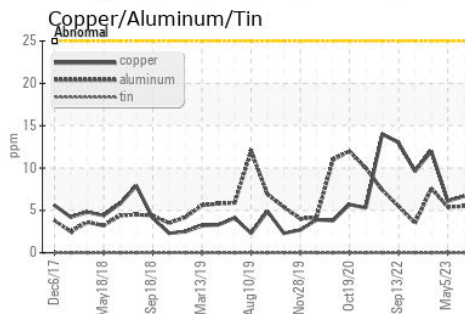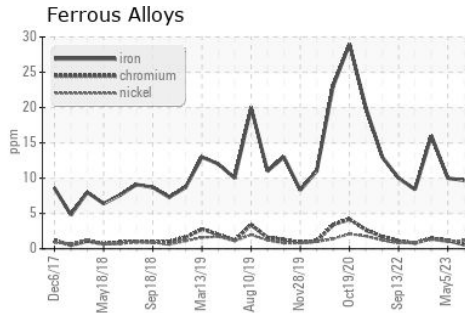

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0827895  
**Lab Number** : **02589575**  
**Unique Number** : 5658641  
**Test Package** : AVI 1 ( Additional Tests: Bottom, FT-IR )

**ROCKCLIFFE FLYING CLUB**  
 1495 SIR GEORGE-ETIENNE, CARTIER PARKWAY MAINTENANCE  
 OTTAWA, ON  
 CA K1K 4Y5  
 Contact: Patrick Giunta  
 maintenance@rfc.ca  
 T: (613)746-4425  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.