




# OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id  
**NEW FLYER 0902**  
 Component  
**Diesel Engine**  
 Fluid  
**SAFETY-KLEEN PERFORMANCE PLUS XHD-7 15W40 (--- GAL)**

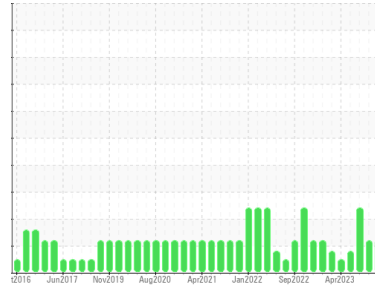

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0830291</b>	WC0849830	WC0830143
Sample Date	Client Info		<b>13 Oct 2023</b>	28 Aug 2023	17 Jul 2023
Machine Age	kms	Client Info	<b>332830</b>	322950	315418
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >75	<b>19</b>	26	26
Chromium	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m) >15	<b>1</b>	2	1
Lead	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185(m) >100	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>&lt;1</b>	1	1
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>56</b>	57	54
Manganese	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	<b>897</b>	930	900
Calcium	ppm	ASTM D5185(m)	<b>971</b>	992	983
Phosphorus	ppm	ASTM D5185(m)	<b>920</b>	983	963
Zinc	ppm	ASTM D5185(m)	<b>1104</b>	1132	1107
Sulfur	ppm	ASTM D5185(m)	<b>2278</b>	2392	2298
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185(m)	<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	<1	<1
Fuel	%	ASTM D7593* >3.0	<b>▲ 5.3</b>	▲ 5.2	■ 6.5

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >6	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	ASTM D7624* >20	<b>10.2</b>	10.0	11.6
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>23.6</b>	24.0	26.6


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>24.0</b>	22.6	29.2




# OIL ANALYSIS REPORT

▲ Fuel Dilution

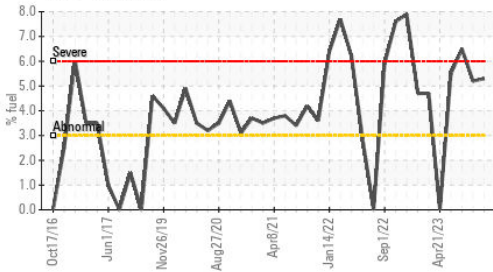

▲ Viscosity @ 100°C

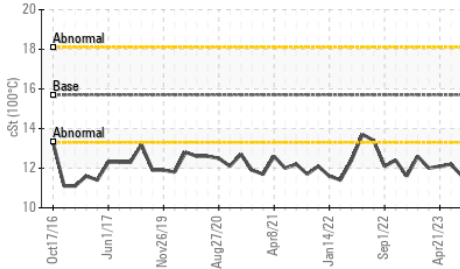


VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.7 ▲ 11.8	▲ 12.3	▲ 11.6

**GRAPHS**


Iron (ppm)

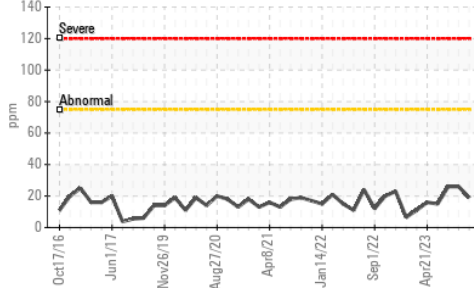


Lead (ppm)

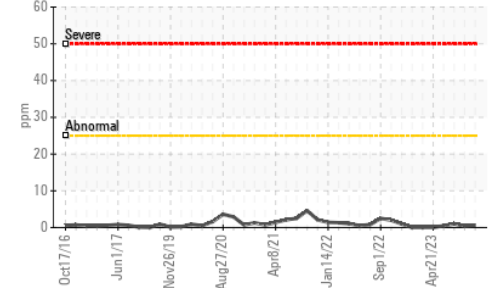


Aluminum (ppm)

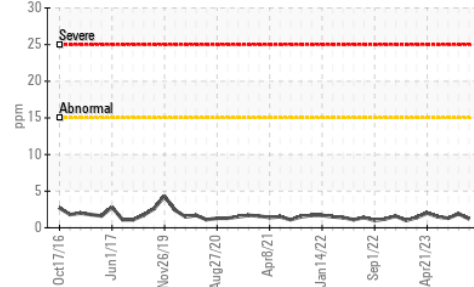


Chromium (ppm)

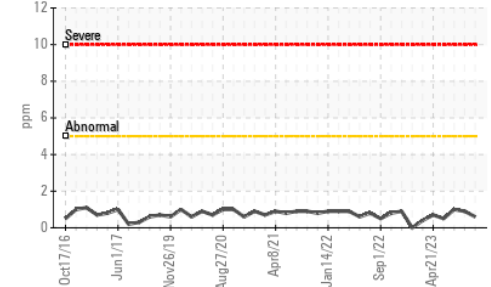


Copper (ppm)

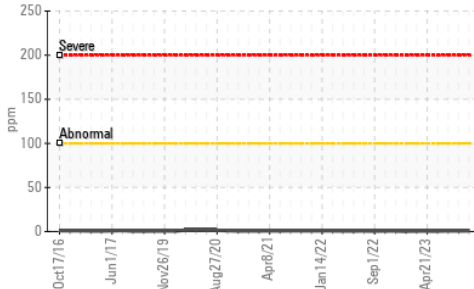


Silicon (ppm)

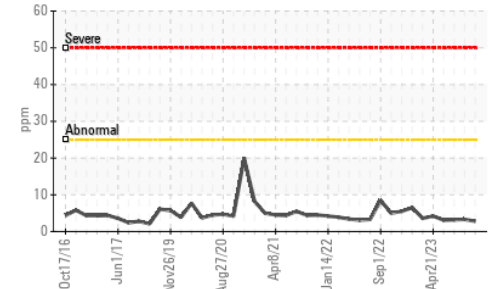

▲ Viscosity @ 100°C

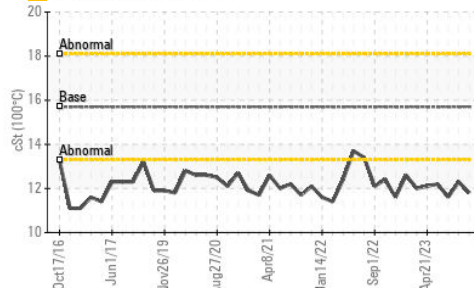

▲ Fuel Dilution

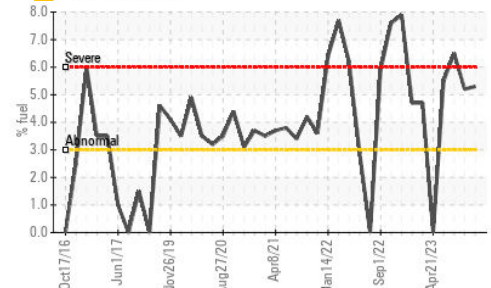

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0830291 **Received** : 18 Oct 2023  
**Lab Number** : 02589903 **Diagnosed** : 19 Oct 2023  
**Unique Number** : 5658969 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.