




# OIL ANALYSIS REPORT

## Sample Rating Trend

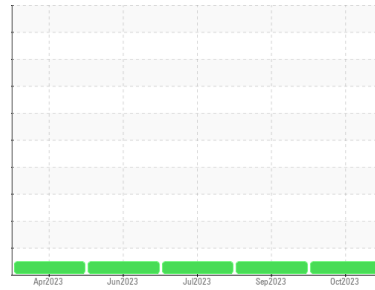

**NORMAL**



Machine Id  
**2224**

Component  
**Natural Gas Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0830204</b>	WC0849812	WC0830147
Sample Date	Client Info		<b>17 Oct 2023</b>	09 Sep 2023	18 Jul 2023
Machine Age	kms	Client Info	<b>0</b>	28949	19735
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>6</b>	9	10
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	1	1
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>35	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	<b>23</b>	10	21
Barium	ppm	ASTM D5185(m)	10	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>51</b>	54	51
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>810</b>	818	801
Calcium	ppm	ASTM D5185(m)	3000	<b>1214</b>	1260	1190
Phosphorus	ppm	ASTM D5185(m)	1150	<b>729</b>	714	758
Zinc	ppm	ASTM D5185(m)	1350	<b>862</b>	903	853
Sulfur	ppm	ASTM D5185(m)	4250	<b>1935</b>	2033	1988
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>12</b>	6	7
Sodium	ppm	ASTM D5185(m)	>158	<b>3</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0

### INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.3</b>	11.9	10.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.5</b>	21.8	20.8

### FLUID DEGRADATION


	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.6</b>	19.6	18.4

### VISUAL

	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG











# OIL ANALYSIS REPORT

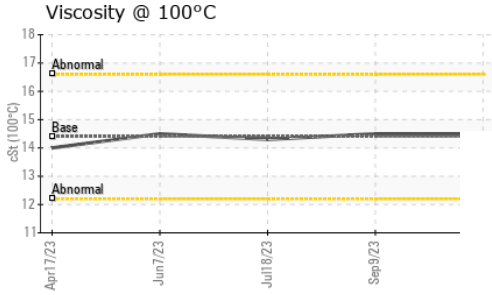

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.5	14.5	14.3

## GRAPHS

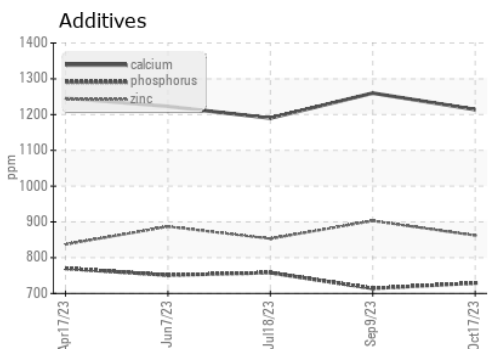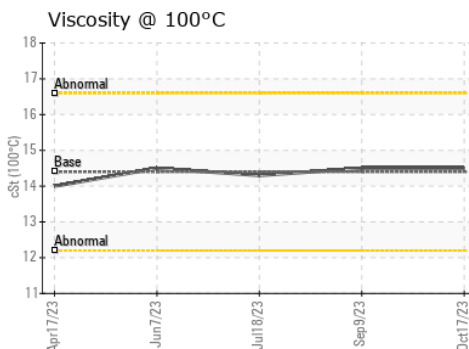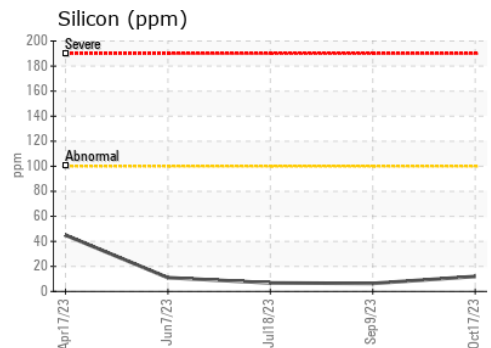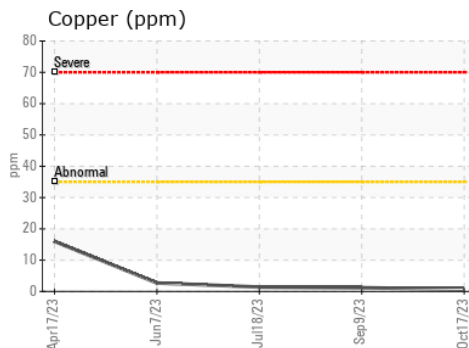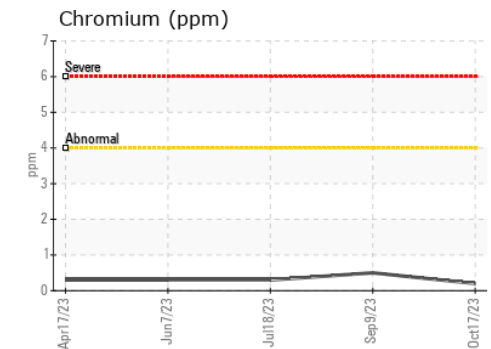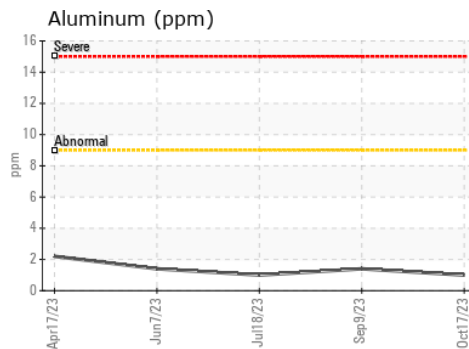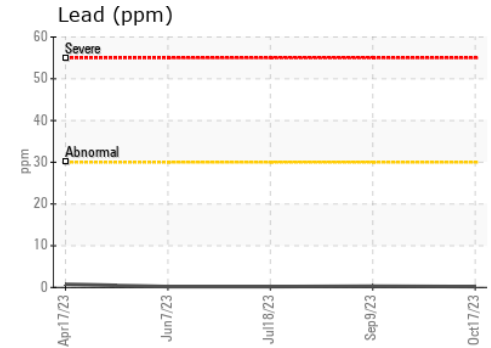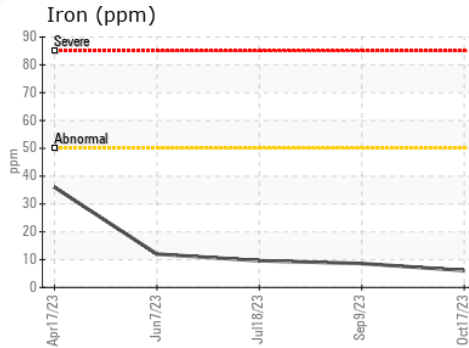

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0830204      **Received** : 18 Oct 2023  
**Lab Number** : 02589916      **Diagnosed** : 18 Oct 2023  
**Unique Number** : 5658982      **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Cliff Bird  
 cliff.bird@hamilton.ca  
 T:  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.