


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

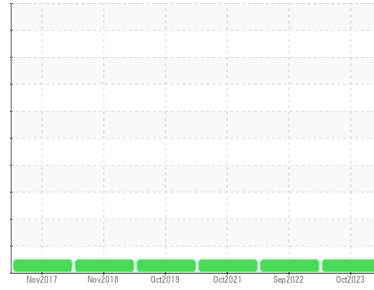

Area
PARTS FOR TRUCK [6100213652]
Machine Id
MERCEDES BENZ 924 942-C-1121570
Component
Diesel Engine
Fluid
CASTROL 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WA0018379	WA0018621	WA0017097
Sample Date	Client Info	06 Oct 2023	30 Sep 2022	05 Oct 2021
Machine Age	hrs	299	251	223
Oil Age	hrs	48	28	25
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	97	47	88
Chromium	ppm ASTM D5185(m) >20	<1	0	<1
Nickel	ppm ASTM D5185(m) >4	0	0	<1
Titanium	ppm ASTM D5185(m)	0	<1	0
Silver	ppm ASTM D5185(m) >3	<1	0	0
Aluminum	ppm ASTM D5185(m) >20	16	10	11
Lead	ppm ASTM D5185(m) >40	2	0	<1
Copper	ppm ASTM D5185(m) >330	1	<1	1
Tin	ppm ASTM D5185(m) >15	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	3	4	1
Barium	ppm ASTM D5185(m)	0	0	0
Molybdenum	ppm ASTM D5185(m)	57	<1	8
Manganese	ppm ASTM D5185(m)	0	<1	<1
Magnesium	ppm ASTM D5185(m)	901	18	129
Calcium	ppm ASTM D5185(m)	1067	2346	2060
Phosphorus	ppm ASTM D5185(m)	972	941	948
Zinc	ppm ASTM D5185(m)	1130	981	1032
Sulfur	ppm ASTM D5185(m)	2551	3068	3025
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	4	2	4
Sodium	ppm ASTM D5185(m) >406	1	1	3
Potassium	ppm ASTM D5185(m) >20	10	16	25
Glycol	% ASTM D7922*	0.0	NEG	NEG



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0	0	0
Nitration	Abs/cm ASTM D7624* >20	4.5	5.4	5.2
Sulfation	Abs/.1mm ASTM D7415* >30	17.7	16.4	16.9









FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	12.2	8.9	9.4

OIL ANALYSIS REPORT

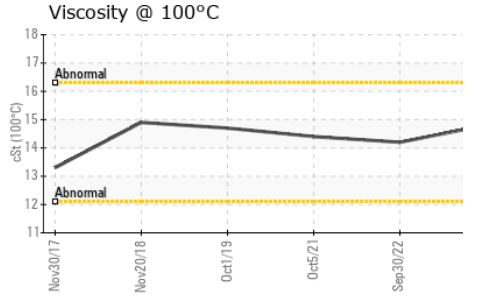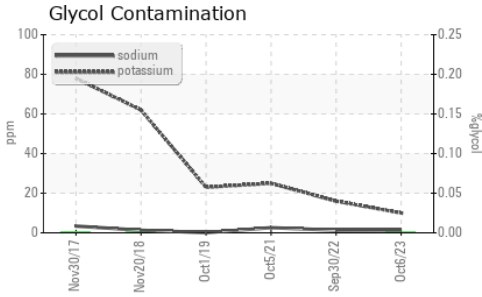

PARAMETER	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG
FLUID PROPERTIES					
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.2	14.4

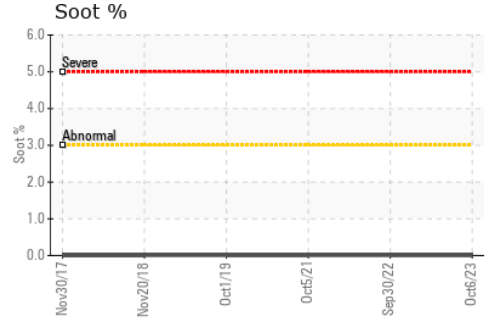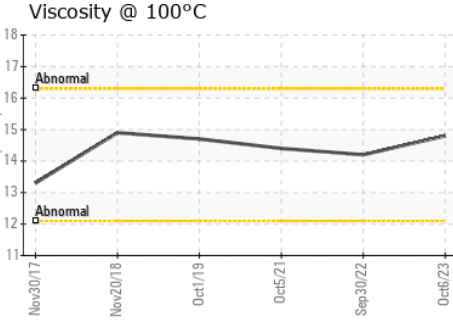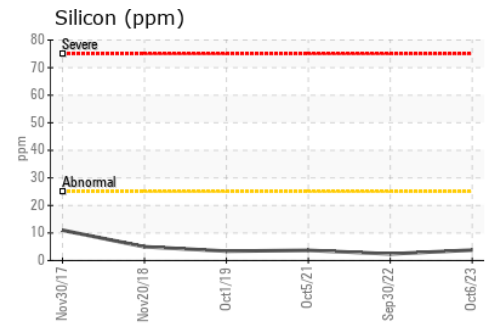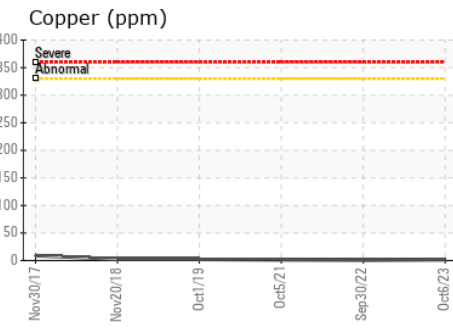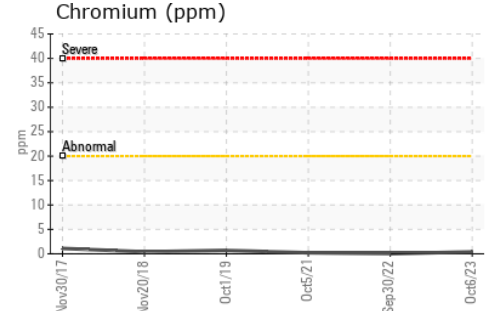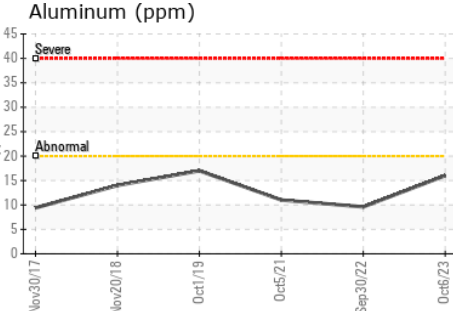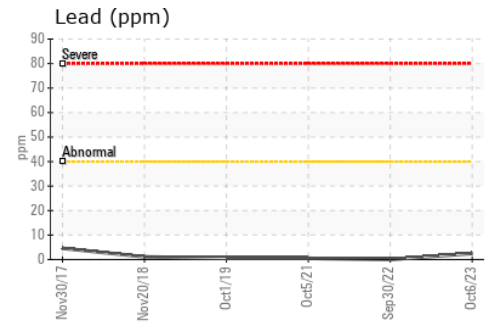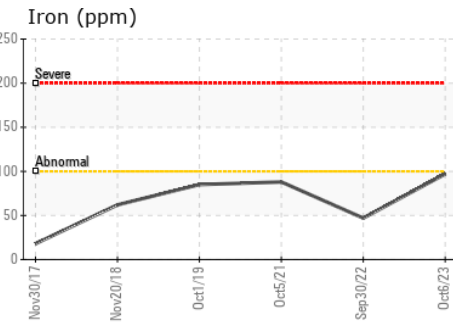

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0018379 **Received** : 18 Oct 2023
Lab Number : 02589959 **Diagnosed** : 18 Oct 2023
Unique Number : 5659025 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

Wajax Power Systems
 485 VENTURE DR
 MONCTON, NB
 CA E1H 2P4
 Contact: M Cormier
 mcormier@wajax.com
 T: (902)496-5467
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.