



Machine Id  
**JOHN DEERE PD010204**  
 Component  
**Hydraulic System**  
 Fluid  
**NOT GIVEN (300 LTR)**

**DIAGNOSIS**

**Recommendation**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

**Wear**

Les taux d'usure de tous les composants sont normaux.

**Contamination**

La propreté du système est acceptable pour votre objectif de propreté ISO 4406. La teneur en eau est négligeable. La propreté du système et du fluide est acceptable.

**Fluid Condition**

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ST43418</b>	---	---
Sample Date	Client Info			<b>03 Oct 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>18</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---






WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>60	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>3</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>95</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>612</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>781</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>1413</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	---	---
Water	%	ASTM D6304*	>0.05	<b>0.007</b>	---	---
ppm Water	ppm	ASTM D6304*	>500	<b>79.9</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>518</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>59</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>7</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>3</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>16/13/10</b>	---	---

# OIL ANALYSIS REPORT

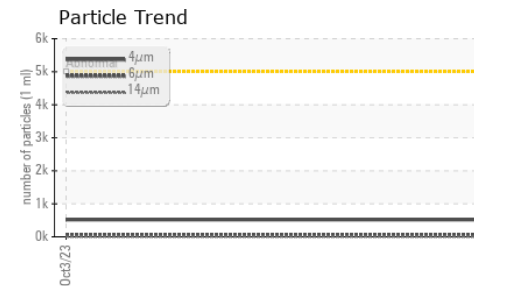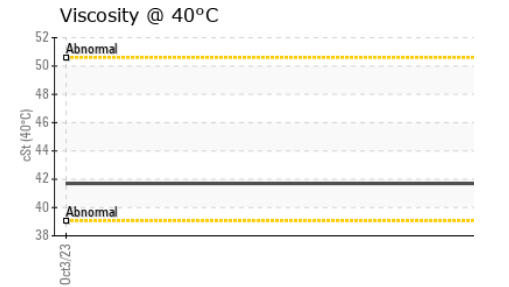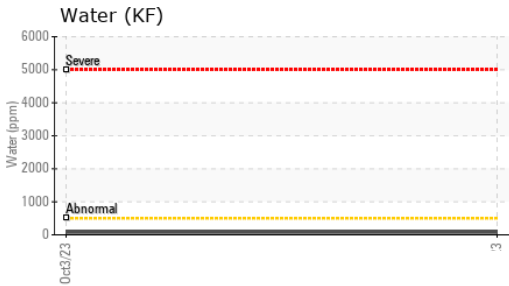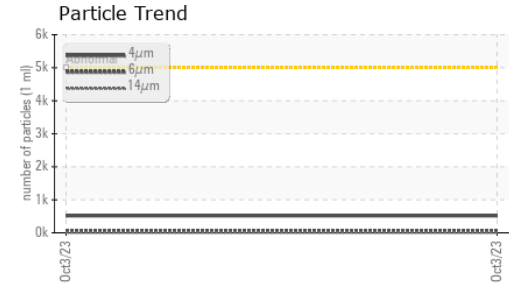
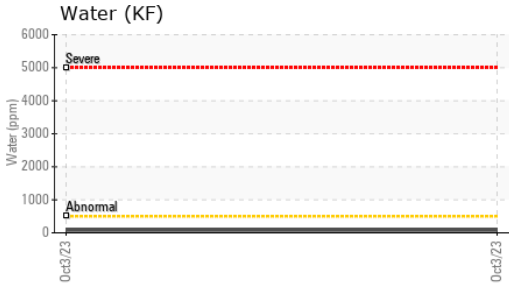


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>1.15</b>	---	---




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		<b>41.7</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

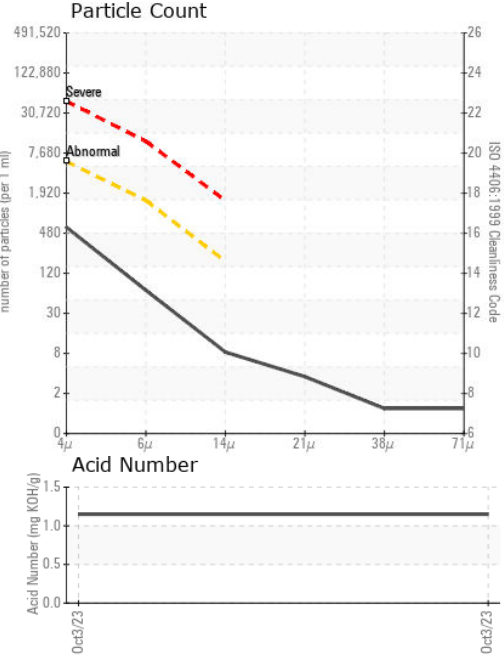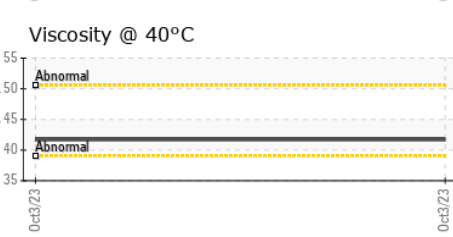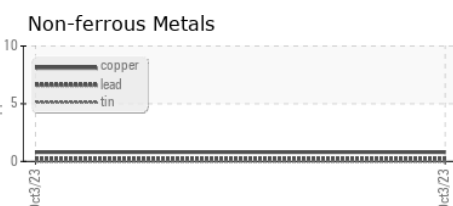

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : ST43418 **Received** : 18 Oct 2023  
**Lab Number** : 02590077 **Diagnosed** : 19 Oct 2023  
**Unique Number** : 5659143 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KF, TAN Man )

**HYDROMECH INC**  
 2921, BLVD WALLBERG  
 DOLBEAU, QC  
 CA G8L 1L6  
 Contact: Sebastien Lalancette  
 slalancette@hydromec.ca  
 T:  
 F: (418)276-8166

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.