




OIL ANALYSIS REPORT

Sample Rating Trend

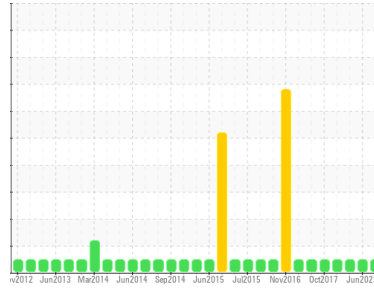

NORMAL



Machine Id
Port Main Engine (S/N T2P01011)
 Component
Port Main Engine
 Fluid
CAT DIESEL ENGINE OIL 15W40 (68 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0829969	WC0754142	WC0321619
Sample Date	Client Info		15 Oct 2023	08 Jun 2023	14 May 2022
Machine Age	hrs	Client Info	19000	18000	16233
Oil Age	hrs	Client Info	500	500	229
Oil Changed	Client Info		Changed	Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	28	18	19
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>5	<1	0	3
Aluminum	ppm	ASTM D5185(m)	>20	<1	2	1
Lead	ppm	ASTM D5185(m)	>40	<1	<1	4
Copper	ppm	ASTM D5185(m)	>300	12	13	21
Tin	ppm	ASTM D5185(m)	>10	0	<1	1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		44	44	57
Barium	ppm	ASTM D5185(m)		<1	0	<1
Molybdenum	ppm	ASTM D5185(m)		44	39	39
Manganese	ppm	ASTM D5185(m)		0	<1	1
Magnesium	ppm	ASTM D5185(m)		523	519	504
Calcium	ppm	ASTM D5185(m)		1756	1676	1679
Phosphorus	ppm	ASTM D5185(m)		929	960	911
Zinc	ppm	ASTM D5185(m)	1460	1100	1081	1112
Sulfur	ppm	ASTM D5185(m)		2413	2371	2488
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	3	4	7
Sodium	ppm	ASTM D5185(m)		3	3	8
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0.1	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	7.3	7.1	6.1
Sulfation	Abs./1mm	ASTM D7415*	>30	23.4	23.3	24.6



OIL ANALYSIS REPORT



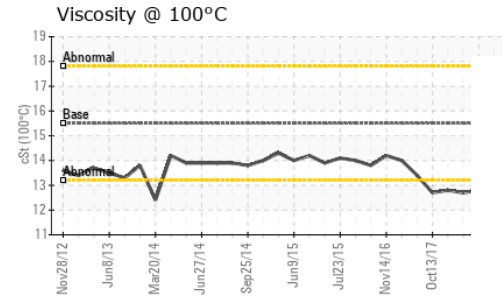
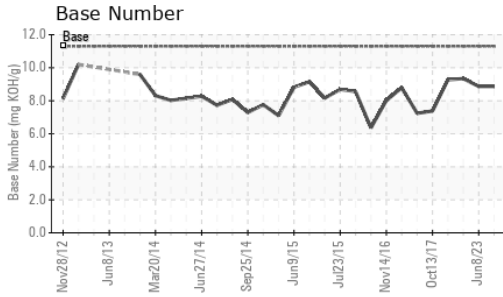


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	21.0	21.3	20.0
Base Number (BN)	mg KOH/g	ASTM D2896*	11.3	8.87	8.87	9.34

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	12.8	12.8	12.7

GRAPHS

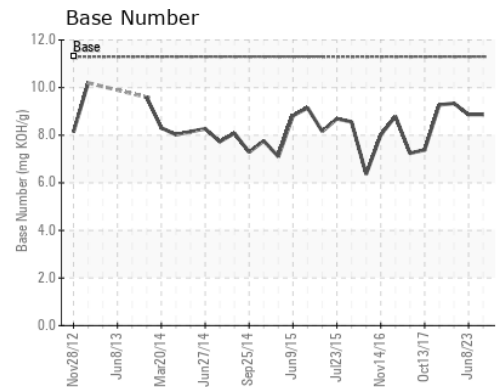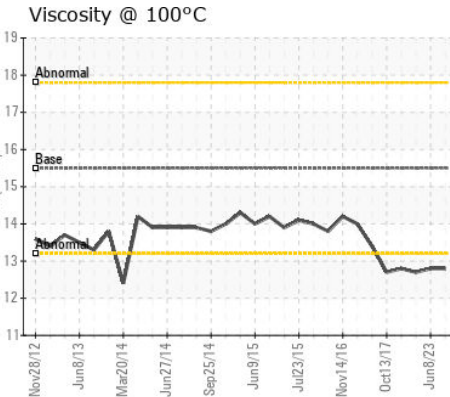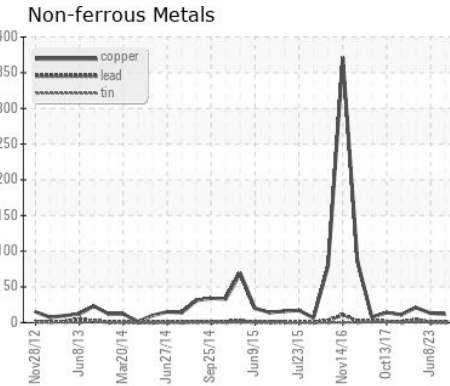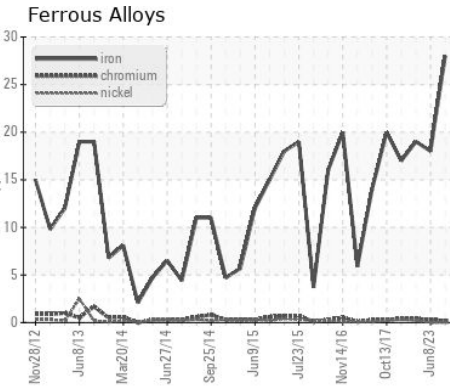

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0829969
Lab Number : **02590182**
Unique Number : 5659248
Test Package : MAR 2

CANADIAN COAST GUARD
 CCGS Vladikov, P.O. Box 5667, 280 Southside Rd.
 St. John's, NL
 CA A1C 5X1
 Contact: Geoff Stewart
 geoffrey.stewart@dfo-mpo.gc.ca
 T: (709)772-4216
 F: (709)772-3652

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.