




# OIL ANALYSIS REPORT

Sample Rating Trend

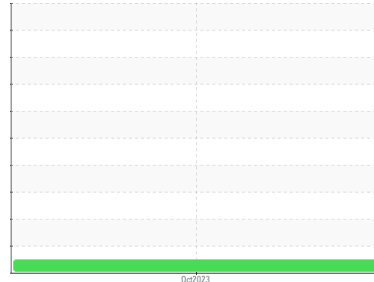

**NORMAL**



Machine Id  
**PORSCHE PORSCHE CAYMAN**

Component  
**Gasoline Engine**

Fluid  
**MOBIL 1 FS 0W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0870029</b>	---	---
Sample Date	Client Info			<b>18 Oct 2023</b>	---	---
Machine Age	kms	Client Info		<b>43872</b>	---	---
Oil Age	kms	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	<b>7</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>40	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>155	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>155</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>66</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>540</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1913</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>782</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>887</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>1854</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	<b>6</b>	---	---
Sodium	ppm	ASTM D5185(m)	>400	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.3</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.8</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>23.9</b>	---	---











# OIL ANALYSIS REPORT

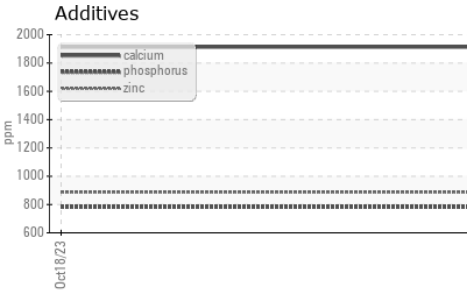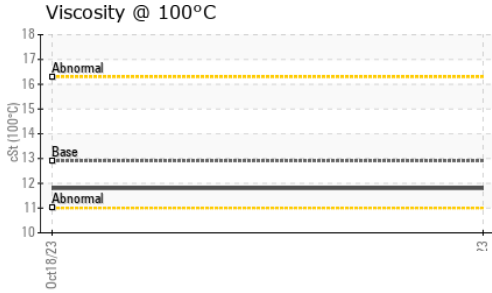

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.9	11.8	---

## GRAPHS

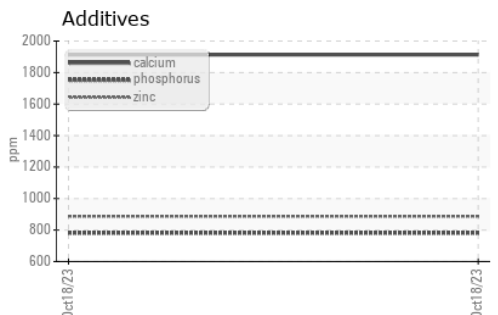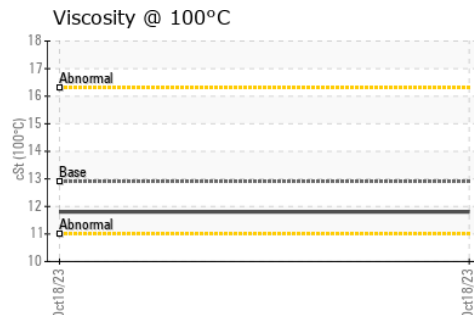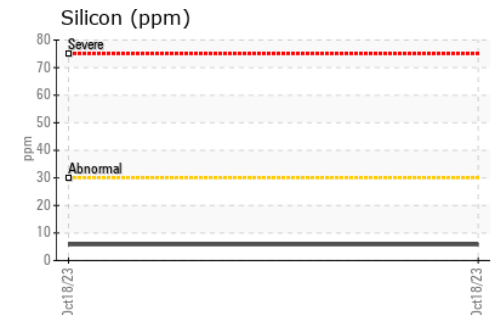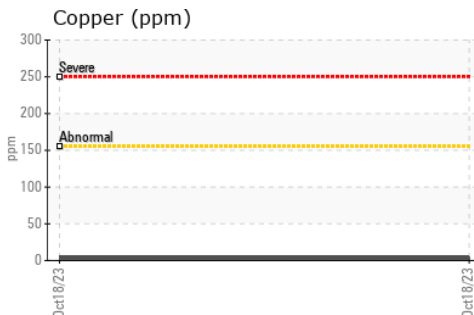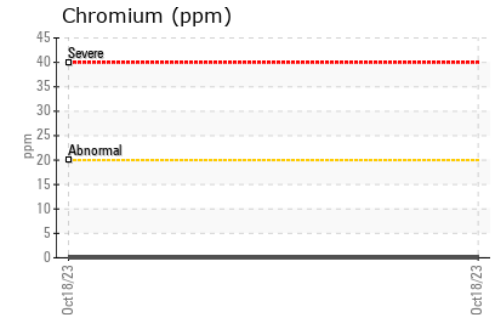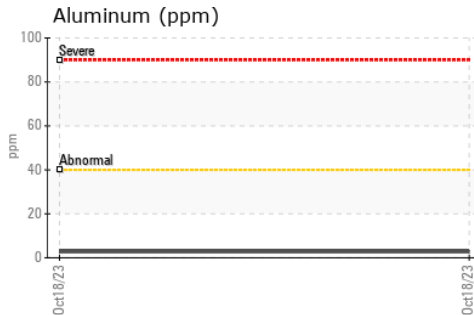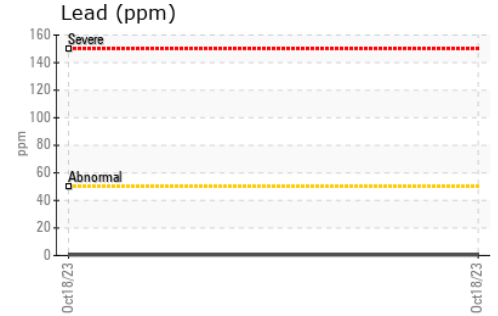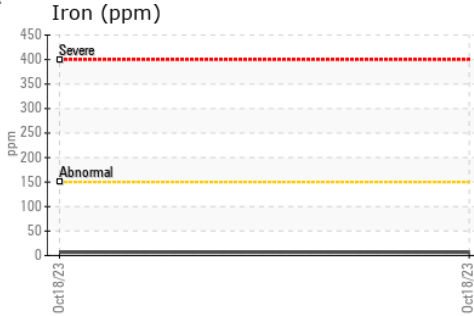

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0870029 Received : 19 Oct 2023  
 Lab Number : 02590249 Diagnosed : 19 Oct 2023  
 Unique Number : 5659315 Diagnostician : Kevin Marson  
 Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Andrew Popp**  
 505 McLeod St.  
 Ottawa, ON  
 CA K1R 5P9  
 Contact: Andrew Popp  
 coughpls@gmail.com  
 T: (613)866-5702  
 F: