




# PROBLEM SUMMARY

Area  
**Saugeen Shores SP-17701**  
 Machine Id  
**ECW #1**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL AERO HF (280 LTR)**

Sample Rating Trend

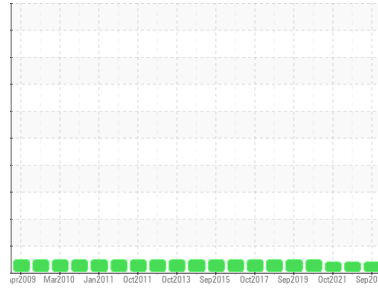


## VISCOSITY




### COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

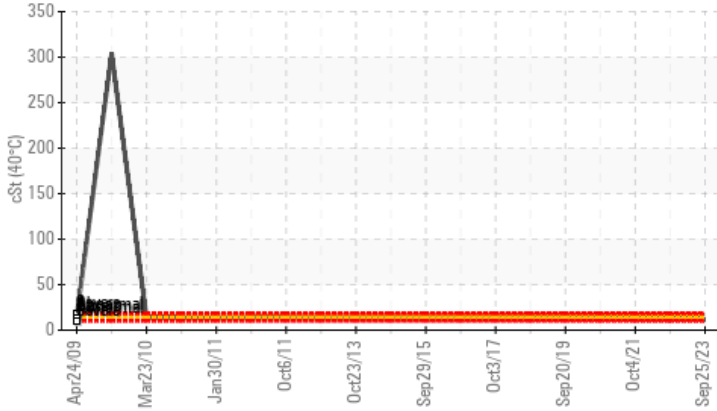

Viscosity @ 100°C

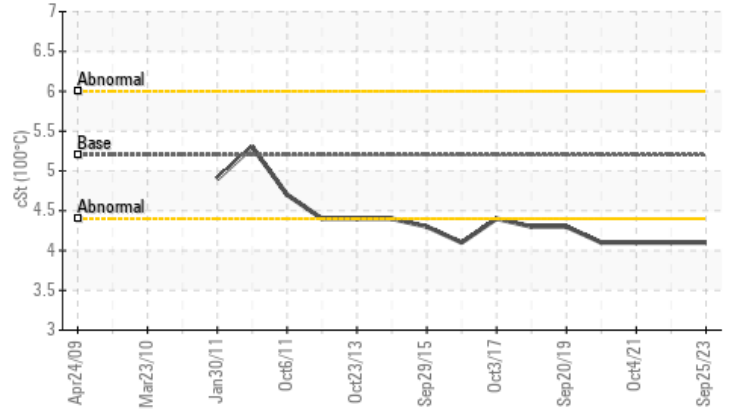

### RECOMMENDATION

Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL
Visc @ 40°C	cSt	ASTM D7279(m)	14.0	▲ 11.5	▲ 11.5	▲ 11.6

Customer Id: VESTAS  
 Sample No.: WC0835229  
 Lab Number: 02590625  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Bill Quesnel CLS, OMA II, MLA-III, LLA-I +1  
 (289)291-4641 x4641  
[Bill.Quesnel@wearcheck.com](mailto:Bill.Quesnel@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

### 27 Sep 2022 Diag: Kevin Marson

#### VISCOSITY



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. Viscosity of sample indicates oil is within ISO 10 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 04 Oct 2021 Diag: Bill Quesnel

#### VISCOSITY



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. Viscosity of sample indicates oil is within ISO 10 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 01 Oct 2020 Diag: Kevin Marson

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. Viscosity of sample indicates oil is within ISO 10 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






# OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area  
**Saugen Shores SP-17701**  
 Machine ID  
**ECW #1**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL AERO HF (280 LTR)**

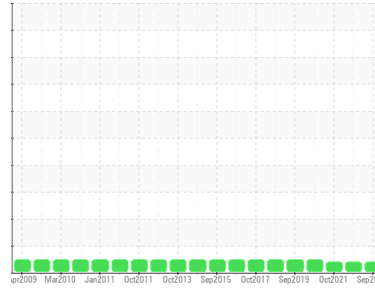

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

### Fluid Condition

Viscosity of sample indicates oil is within ISO 10 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0835229</b>	WC0577979	WC0546457
Sample Date	Client Info		<b>25 Sep 2023</b>	27 Sep 2022	04 Oct 2021
Machine Age	yrs	Client Info	<b>15</b>	14	0
Oil Age	yrs	Client Info	<b>15</b>	14	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>50	<b>0</b>	0	0
Iron	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1
Chromium	ppm	ASTM D5185(m)	>15	<b>0</b>	0
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	0
Aluminum	ppm	ASTM D5185(m)	>10	<b>0</b>	0
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0
Copper	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>0</b>	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0
Magnesium	ppm	ASTM D5185(m)	0.4	<b>0</b>	0
Calcium	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	<1
Phosphorus	ppm	ASTM D5185(m)	426	<b>363</b>	386
Zinc	ppm	ASTM D5185(m)	0.9	<b>4</b>	4
Sulfur	ppm	ASTM D5185(m)	93	<b>180</b>	189
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1
Sodium	ppm	ASTM D5185(m)	>10	<b>2</b>	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1
Water	%	ASTM D6304*	>0.03	<b>0.006</b>	0.003
ppm Water	ppm	ASTM D6304*	>300	<b>61.5</b>	39.3


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0
Nitration	Abs/cm	ASTM D7624*		<b>3.5</b>	3.8
Sulfation	Abs/.1mm	ASTM D7415*		<b>49.3</b>	50.0




# OIL ANALYSIS REPORT


▲ Viscosity @ 40°C

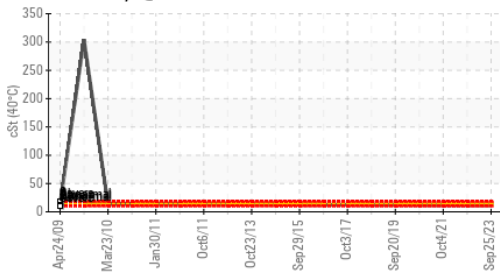


Particle Count

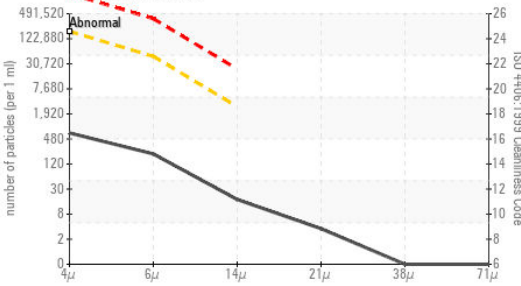


Acid Number

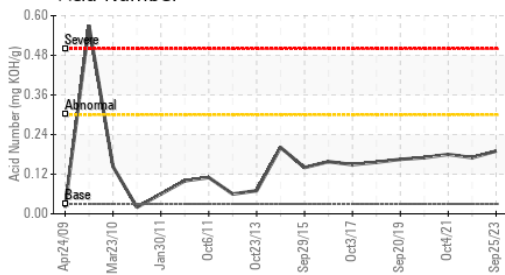

Water (KF)

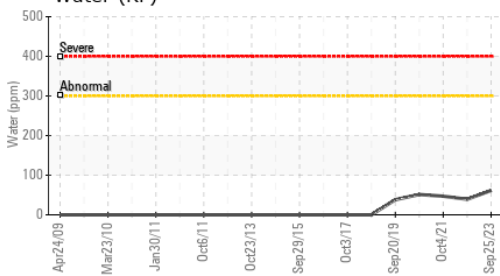

Viscosity @ 100°C

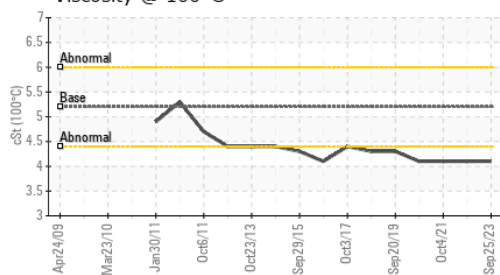


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>160000	<b>588</b>	191	123
Particles >6µm	ASTM D7647	>40000	<b>185</b>	51	43
Particles >14µm	ASTM D7647	>2500	<b>15</b>	5	6
Particles >21µm	ASTM D7647	>640	<b>3</b>	1	2
Particles >38µm	ASTM D7647	>160	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>40	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>24/22/18	<b>16/15/11</b>	15/13/10	14/13/10

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	<b>41.3</b>	42.3	41.2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.19</b>	0.17	0.18

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.03	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	14.0	▲ 11.5	▲ 11.5
Visc @ 100°C	cSt	ASTM D7279(m)	5.2	▲ 4.1	4.1
Viscosity Index (VI)	Scale	ASTM D2270*	370	315	310

SAMPLE IMAGES

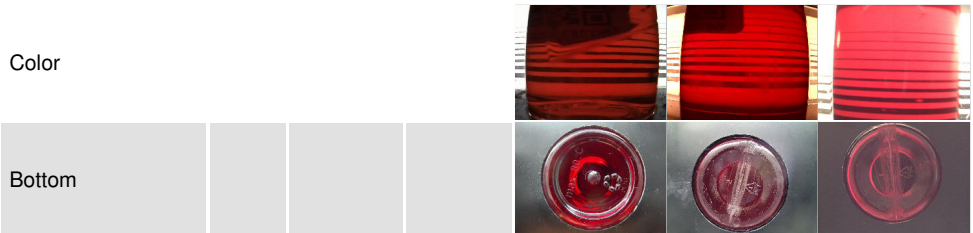

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Vestas American Wind Technology Inc.  
**Sample No.** : WC0835229 **Received** : 20 Oct 2023  
**Lab Number** : 02590625 **Diagnosed** : 23 Oct 2023  
**Unique Number** : 5659691 **Diagnostician** : Bill Quesnel  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KF, KV100, PQ, TAN Man, VI )  
 To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

1417 NW Everett Street  
 Portland, OR  
 US 97209  
 Contact: Katie Horner  
 kahor@vestas.com  
 T: (519)368-7500  
 F: (519)368-7535