


PROBLEM SUMMARY

Sample Rating Trend


WATER



Area
Toyota - 888058
 Machine Id
A2310106
 Component
Unknown Component
 Fluid
NOT GIVEN (--- GAL)

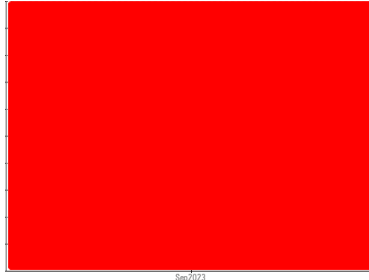

COMPONENT CONDITION SUMMARY

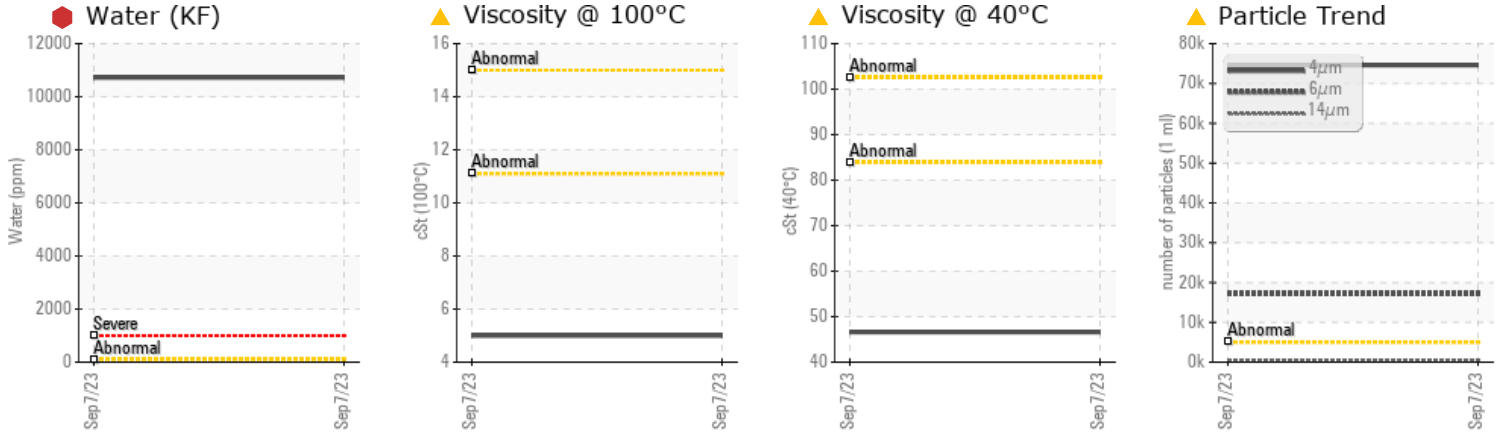

RECOMMENDATION

This is a baseline read-out on the submitted sample.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Water	%	ASTM D6304*		1.072	---	---
ppm Water	ppm	ASTM D6304*		10722.9	---	---
Particles >4µm		ASTM D7647	>5000	74589	---	---
Particles >6µm		ASTM D7647	>1300	17156	---	---
Particles >14µm		ASTM D7647	>160	539	---	---
Particles >21µm		ASTM D7647	>40	78	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	23/21/16	---	---
Emulsified Water	scalar	Visual*		.5%	---	---
Free Water	scalar	Visual*		5%	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		46.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		5	---	---

Customer Id: CHECOB
 Sample No.: E30000551
 Lab Number: 02590631
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Tatiana Sorkina +1 (800)263-3939
tsorkina@e360s.ca

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS


There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

WATER

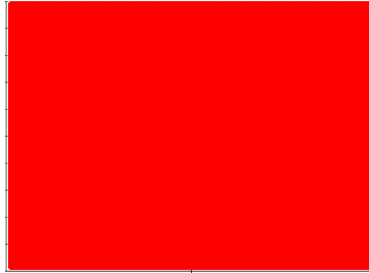

Area
Toyota - 888058
 Machine Id
A2310106
 Component
Unknown Component
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

Wear

{not applicable}

Contamination

ppm Water contamination levels are severely high.
 Water contamination levels are severely high.
 Water contamination levels are severely high..
 Particles >4µm are abnormally high. Particles >6µm are abnormally high. Oil Cleanliness are abnormally high. Particles >14µm are abnormally high. Particles >21µm are notably high.

Fluid Condition

Visc @ 100°C is abnormally low. Visc @ 40°C is abnormally low.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Batch #	Client Info		Press	---	---
Machine ID	Client Info		Sales	---	---
Sample From	Client Info		Initial	---	---
Production Stage	Client Info		10/18/2023	---	---
Sample Number	Client Info		E30000551	---	---
Sample Date	Client Info		07 Sep 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	17	---	---
Chromium	ppm	ASTM D5185(m)	0	---	---
Nickel	ppm	ASTM D5185(m)	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	<1	---	---
Aluminum	ppm	ASTM D5185(m)	<1	---	---
Lead	ppm	ASTM D5185(m)	2	---	---
Copper	ppm	ASTM D5185(m)	3	---	---
Tin	ppm	ASTM D5185(m)	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---






ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	1	---	---
Barium	ppm	ASTM D5185(m)	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	<1	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	2	---	---
Calcium	ppm	ASTM D5185(m)	45	---	---
Phosphorus	ppm	ASTM D5185(m)	312	---	---
Zinc	ppm	ASTM D5185(m)	453	---	---
Sulfur	ppm	ASTM D5185(m)	1086	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	3	---	---
Sodium	ppm	ASTM D5185(m)	2	---	---
Potassium	ppm	ASTM D5185(m) >20	<1	---	---
Water	%	ASTM D6304*	1.072	---	---
ppm Water	ppm	ASTM D6304*	10722.9	---	---

OIL ANALYSIS REPORT

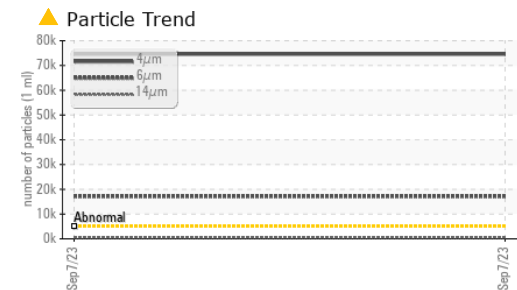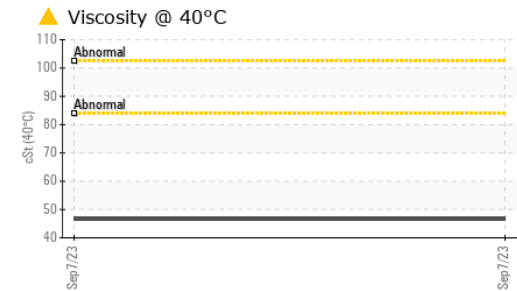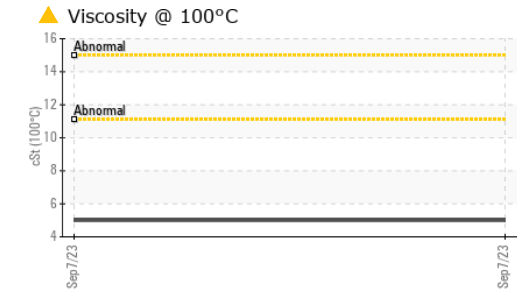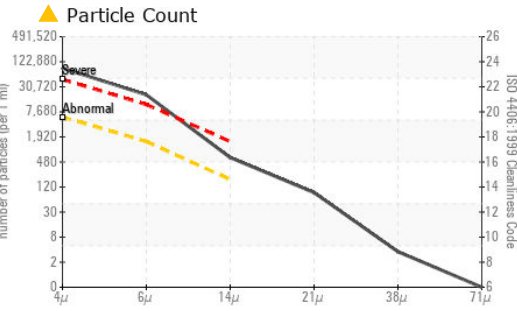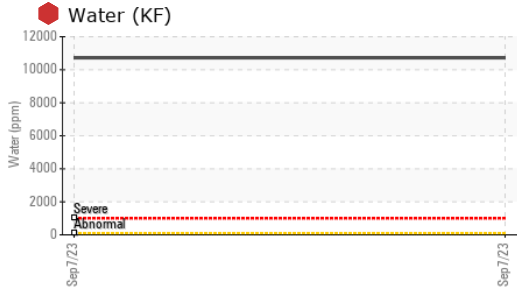

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 74589	---	---
Particles >6µm	ASTM D7647	>1300	▲ 17156	---	---
Particles >14µm	ASTM D7647	>160	▲ 539	---	---
Particles >21µm	ASTM D7647	>40	▲ 78	---	---
Particles >38µm	ASTM D7647	>10	3	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/21/16	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.51	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	LAYRD	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	● .5%	---	---	
Free Water	scalar	Visual*	● 5%	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	▲ 46.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	▲ 5	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30000551
Lab Number : 02590631
Unique Number : 5659697
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Pierre Guillet
 pguillet@e360s.ca
 T:
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.