




# OIL ANALYSIS REPORT

Sample Rating Trend

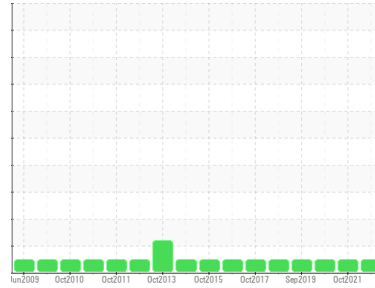

**NORMAL**



Area  
**Saugen Shores SP-17701**  
 Machine Id  
**04K05**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL AERO HF (280 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0835243</b>	WC0546327	WC0419199
Sample Date	Client Info		<b>04 Oct 2023</b>	27 Oct 2021	16 Oct 2020
Machine Age	yrs	Client Info	<b>15</b>	13	12
Oil Age	yrs	Client Info	<b>15</b>	13	12
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>50	<b>0</b>	0	---
Iron	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1
Chromium	ppm	ASTM D5185(m)	>15	<b>0</b>	<1
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1
Aluminum	ppm	ASTM D5185(m)	>10	<b>0</b>	<1
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1
Copper	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	1
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>0</b>	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0
Magnesium	ppm	ASTM D5185(m)	0.4	<b>0</b>	<1
Calcium	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	<1
Phosphorus	ppm	ASTM D5185(m)	426	<b>369</b>	397
Zinc	ppm	ASTM D5185(m)	0.9	<b>3</b>	2
Sulfur	ppm	ASTM D5185(m)	93	<b>304</b>	194
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1

## CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>10	<b>1</b>	<1
Sodium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1
Water	%	ASTM D6304*	>0.03	<b>0.005</b>	0.004
ppm Water	ppm	ASTM D6304*	>300	<b>57.8</b>	47.4

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0
Nitration	Abs/cm	ASTM D7624*		<b>3.5</b>	12.0
Sulfation	Abs/.1mm	ASTM D7415*		<b>50.3</b>	72.4



# OIL ANALYSIS REPORT

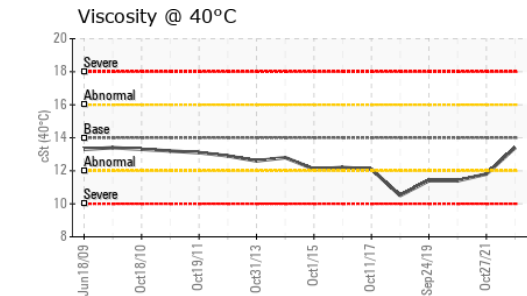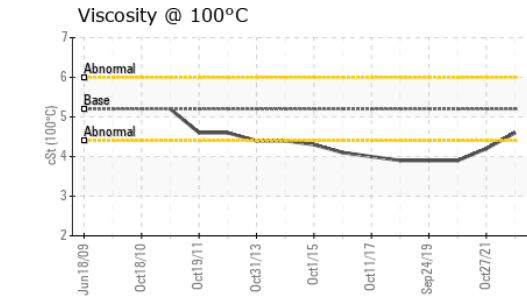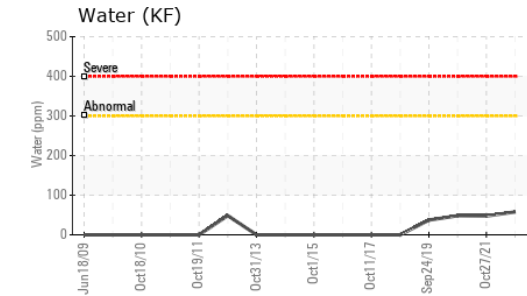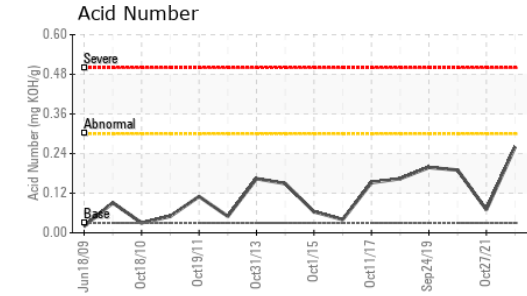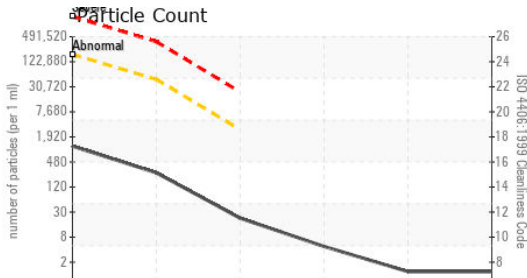


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>160000	<b>1011</b>	609	177
Particles >6µm	ASTM D7647	>40000	<b>232</b>	142	53
Particles >14µm	ASTM D7647	>2500	<b>19</b>	17	7
Particles >21µm	ASTM D7647	>640	<b>4</b>	6	3
Particles >38µm	ASTM D7647	>160	<b>1</b>	1	1
Particles >71µm	ASTM D7647	>40	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>24/22/18	<b>17/15/11</b>	16/14/11	15/13/10

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	<b>42.8</b>	57.4	---
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.26</b>	0.07	0.19

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*	<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>13.4</b>	11.8	11.4
Visc @ 100°C	cSt	ASTM D7279(m)	<b>4.6</b>	4.2	3.9
Viscosity Index (VI)	Scale	ASTM D2270*	<b>312</b>	318	284

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

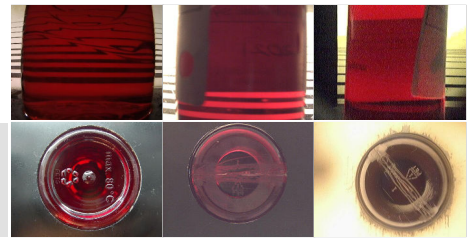

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Vestas American Wind Technology Inc.  
**Sample No.** : WC0835243 **Received** : 20 Oct 2023  
**Lab Number** : **02590646** **Diagnosed** : 23 Oct 2023  
**Unique Number** : 5659712 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KF, KV100, PQ, TAN Man, VI )

1417 NW Everett Street  
 Portland, OR  
 US 97209  
 Contact: Nicole Philippi  
 NiPhi@vestas.com  
 T: (503)327-7683  
 F: (503)327-0247

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.