

OIL ANALYSIS REPORT

SISTERS OF MERCEY KOHLER KOHLER

Component

Unknown Component

NOT GIVEN (--- GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Please provide more complete information on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Component wear rates appear to be normal (unconfirmed).

Contamination

There is no indication of any contamination in the component(unconfirmed).


Fluid Condition

The condition of the sample is acceptable for the time in service.

				Oct2023		
SAMPLE INFORM	MOITAN	method	limit/base	current	history1	history2
Sample Number		Client Info		WA0020064		
Sample Date		Client Info		18 Oct 2023		
Machine Age	hrs	Client Info		419		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		1		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		<1		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		169		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		10		
Calcium	ppm	ASTM D5185(m)		2038		
Phosphorus	ppm	ASTM D5185(m)		924		
Zinc	ppm	ASTM D5185(m)		1055		
Sulfur	ppm	ASTM D5185(m)		2811		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	mm/basc	4		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	5		
VISUAL	La La	method	limit/base	current	history1	history2
	0001="				,	,
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual* Visual*	NONE	NONE		
Precipitate	scalar		NONE	NONE NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris Sand/Dirt	scalar	Visual*	NONE			
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water 1:29:39) Rev: 1	scalar	Visual*		NEG Contact/Lo	cation: Alex Jr E	arle - DDAMOU
				30.11a0i/ L0		



OIL ANALYSIS REPORT

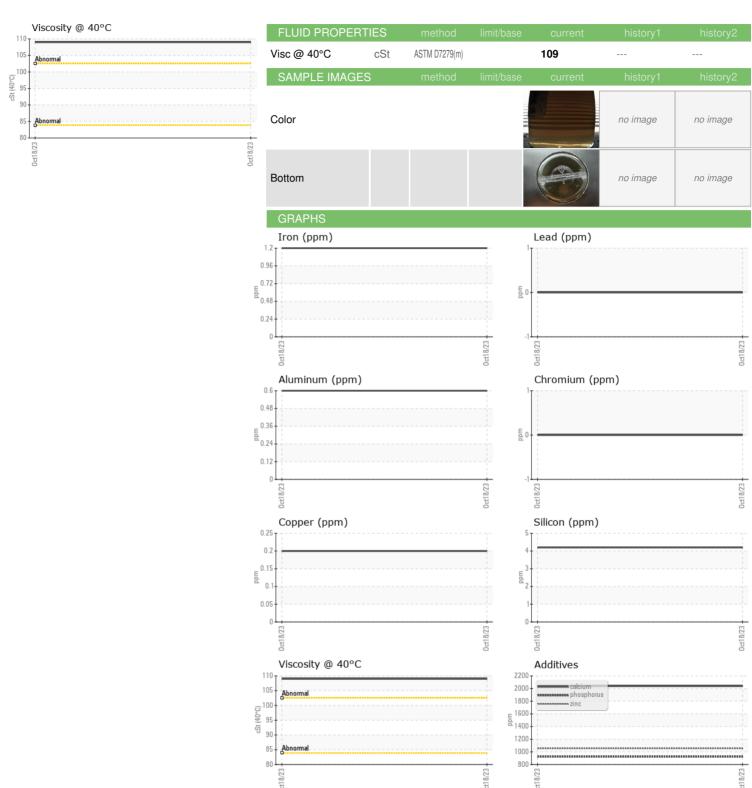



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number

: WA0020064

: 02590674 Unique Number : 5659740 Test Package : MOB 1

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 20 Oct 2023 Diagnosed : 22 Oct 2023

Diagnostician : Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

WAJAX POWER SYSTEMS

1 PANTHER PLACE MOUNT PEARL, NL **CA A1N 5B7**

Contact: Alex Jr Earle aearle@wajax.com T: (709)747-7341

F: (709)747-8752