

## **OIL ANALYSIS REPORT**

Sample Rating Trend

## NORMAL

### Area Hydro Extrusions - S08200 A2310121

Component Hydraulic System Fluid NOT GIVEN (--- GAL)

#### DIAGNOSIS

#### Recommendation

This is a baseline read-out on the submitted sample.

Wear


{not applicable}


Contamination {not applicable}


				Sep2023		
SAMPLE INFORM	<b>/IATION</b>	method	limit/base	current	history1	history2
Batch #		Client Info		Press 2		
Machine ID		Client Info		Sales		
Department		Client Info		Machine		
Sample From		Client Info		Initial		
Production Stage		Client Info		10/20/2023		
Sample Number		Client Info		E30000573		
Sample Date		Client Info		06 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	10		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		2		
Calcium	ppm	ASTM D5185(m)		58		
Phosphorus	ppm	ASTM D5185(m)		322		
Zinc	ppm	ASTM D5185(m)		383		
Sulfur	ppm	ASTM D5185(m)		671		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*	>0.05	0.003		
ppm Water	ppm	ASTM D6304*	>500	30.8		




# **OIL ANALYSIS REPORT**







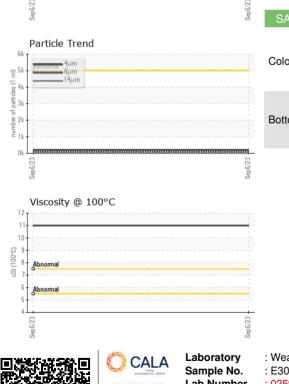

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	204		
Particles >6µm		ASTM D7647	>1300	72		
Particles >14µm		ASTM D7647	>160	7		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.41		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		93.1		
Visc @ 100°C	cSt	ASTM D7279(m)		11.0		
Viscosity Index (VI)	Scale	ASTM D2270*		102		
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image