




PROBLEM SUMMARY


Area
Curing Department
 Machine Id
PHC16
 Component
Hydraulic System
 Fluid
ISO 68 (200 GAL)

Sample Rating Trend

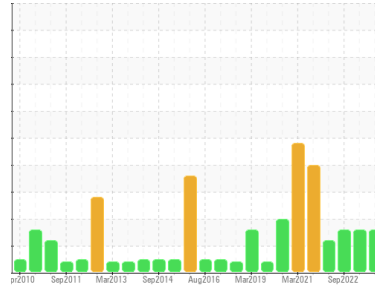

COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

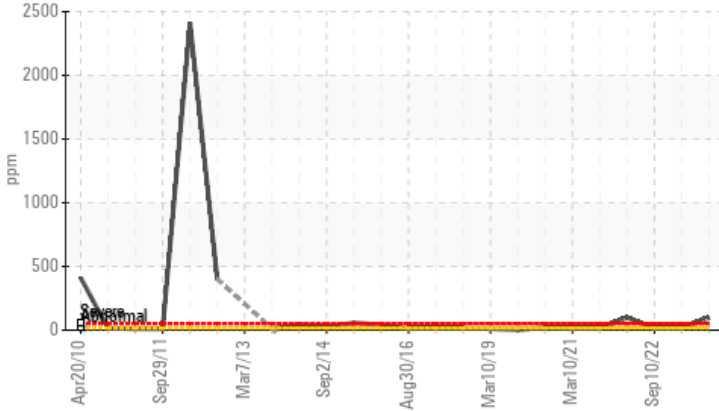

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL	ABNORMAL	ATTENTION			
Silicon	ppm	ASTM D5185(m)	>15	▲ 97	15	15

Customer Id: GOONAP
 Sample No.: WC0851369
 Lab Number: 02591025
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS

10 Mar 2023 Diag: Kevin Marson

WEAR



We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid. Iron ppm levels are abnormal. Aluminum ppm levels are marginal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



10 Sep 2022 Diag: Wes Davis

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



10 Mar 2022 Diag: Wes Davis

ISO



We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. Particles >4µm are abnormally high. Particles >6µm are notably high. Particles >14µm are notably high. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

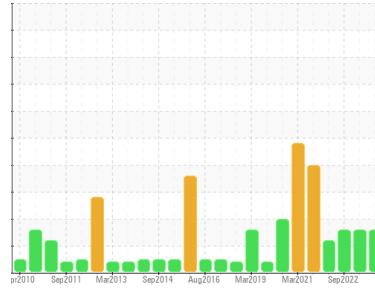

DIRT



Area
Curing Department
 Machine Id
PHC16
 Component
Hydraulic System
 Fluid
ISO 68 (200 GAL)

DIAGNOSIS

Recommendation

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal. Suspect wear metal(s) are high due to process contamination.

Contamination

Abnormal element levels due to process contamination.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0851369	WC0794157	WC0736521
Sample Date	Client Info		09 Oct 2023	10 Mar 2023	10 Sep 2022
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ATTENTION

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	0	---
Iron	ppm	ASTM D5185(m) >20	36	▲ 40	33
Chromium	ppm	ASTM D5185(m) >20	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >20	2	2	2
Titanium	ppm	ASTM D5185(m)	0	<1	<1
Silver	ppm	ASTM D5185(m)	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	7	▲ 9	2
Lead	ppm	ASTM D5185(m) >20	16	19	17
Copper	ppm	ASTM D5185(m) >20	126	130	124
Tin	ppm	ASTM D5185(m) >20	0	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	<1	<1
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<1	<1	<1
Barium	ppm	ASTM D5185(m)	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0	0	0
Manganese	ppm	ASTM D5185(m)	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	36	24	38
Calcium	ppm	ASTM D5185(m)	67	67	71
Phosphorus	ppm	ASTM D5185(m)	702	793	727
Zinc	ppm	ASTM D5185(m)	589	582	559
Sulfur	ppm	ASTM D5185(m)	2170	2467	2222
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	▲ 97	15	15
Sodium	ppm	ASTM D5185(m)	4	2	4
Potassium	ppm	ASTM D5185(m) >20	1	0	<1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	2342	4608	▲ 7723
Particles >6µm	ASTM D7647	>1300	405	1074	▲ 1871
Particles >14µm	ASTM D7647	>160	16	70	▲ 195
Particles >21µm	ASTM D7647	>40	4	16	34
Particles >38µm	ASTM D7647	>10	2	0	1
Particles >71µm	ASTM D7647	>3	1	0	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	18/16/11	19/17/13	▲ 20/18/15



OIL ANALYSIS REPORT

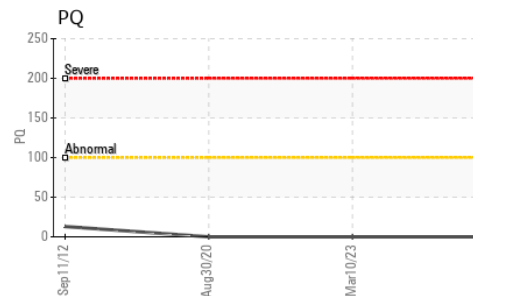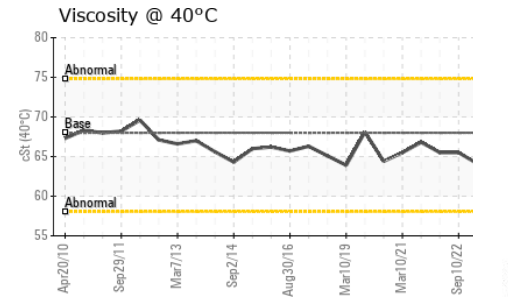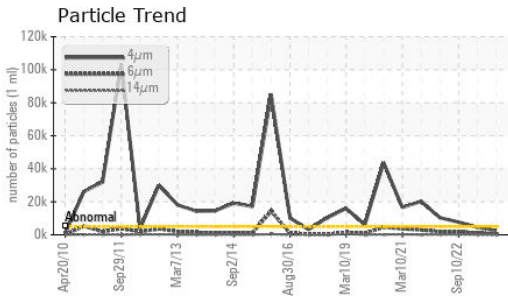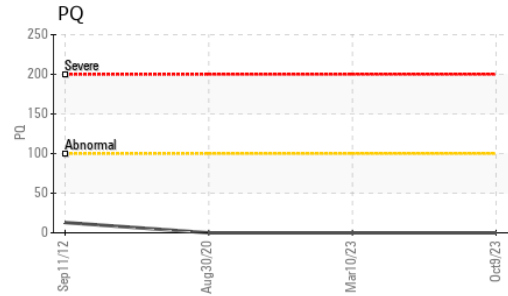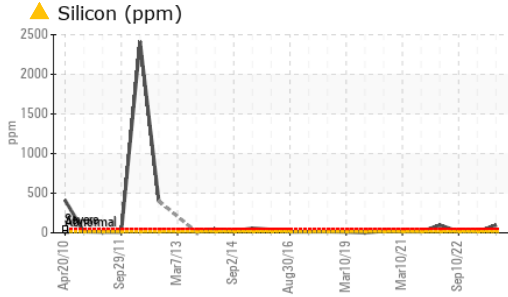


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.04	0.94	0.91






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	64.7	64.1	65.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

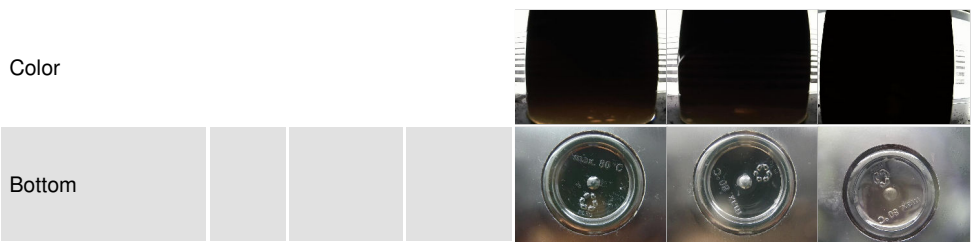

GRAPHS

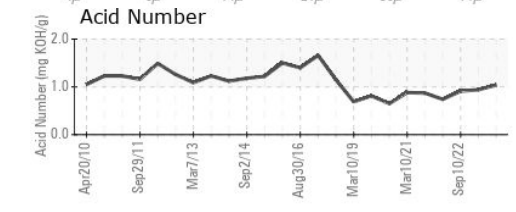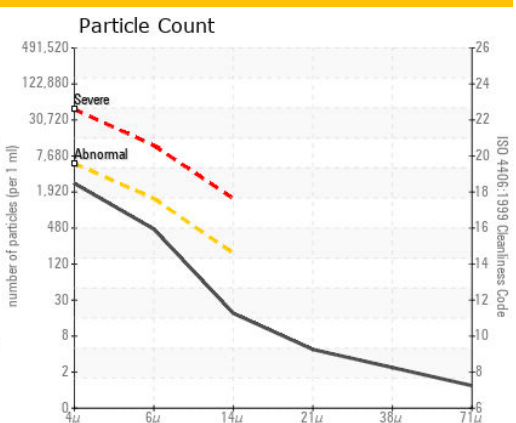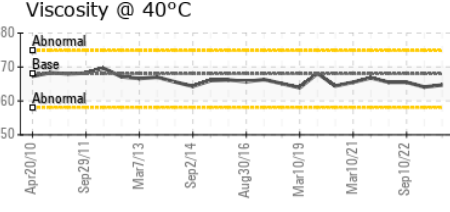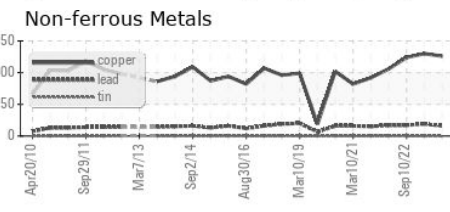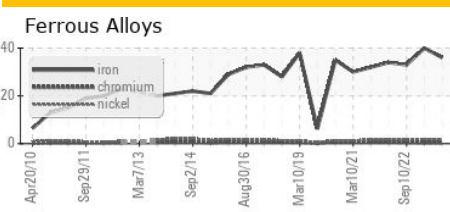

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0851369
Lab Number : 02591025
Unique Number : 5668104
Test Package : IND 2 (Additional Tests: PQ, TAN Man)

Goodyear Napanee
 388 GOODYEAR ROAD
 NAPANEE, ON
 CA K7R 3L2
 Contact: Mohammad Waleed
 Mohammad_Waleed@goodyear.com
 T: (613)354-7709
 F: (613)354-9377

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.