



COOLANT REPORT

Sample Rating Trend

NORMAL



Area
PADLAYAT (MARTIN LEBELLE) [2117]
 Machine Id
5KJJASFG1MPMH6271
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon. Veuillez communiquer avec un représentant Cummins AOK au sujet de l'achat d'une trousse d'échantillonnage appropriée à vos besoins. Notez: nous recommandons d'acheter les trousse MOB 2 pour cet équipement, ce testkit inclut le Compte de Particule pour déterminer la propreté ISO du liquide.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

La teneur en eau est négligeable. Il n'y a aucune indication de contamination dans le composant (non confirmée).

Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			CU0019945	---	---
Sample Date	Client Info			22 Oct 2023	---	---
Machine Age	hrs	Client Info		8898	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CORROSION INHIBITORS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		5	---	---
Phosphorus	ppm	ASTM D5185(m)		511	---	---
Boron	ppm	ASTM D5185(m)		224	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---


CORROSION		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	6	---	---
Aluminum	ppm	ASTM D5185(m)	>10	2	---	---
Copper	ppm	ASTM D5185(m)	>75	4	---	---
Lead	ppm	ASTM D5185(m)	>10	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Silver	ppm	ASTM D5185(m)		<1	---	---
Zinc	ppm	ASTM D5185(m)		7	---	---

CARRIER SALTS		method	limit/base	current	history1	history2
Sodium	ppm	ASTM D5185(m)		9	---	---
Potassium	ppm	ASTM D5185(m)		2	---	---

SCALE POTENTIAL		method	limit/base	current	history1	history2
Calcium	ppm	ASTM D5185(m)		234	---	---
Magnesium	ppm	ASTM D5185(m)		4	---	---












COOLANT REPORT

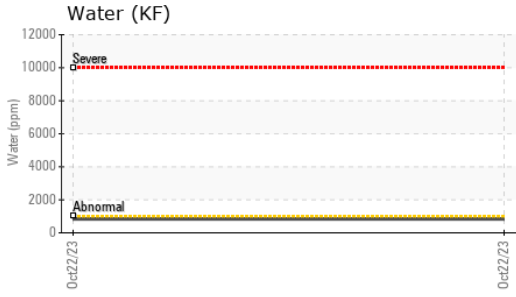

VISUAL	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

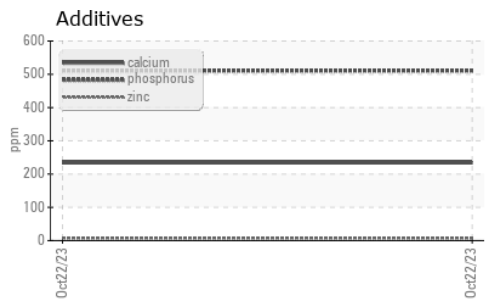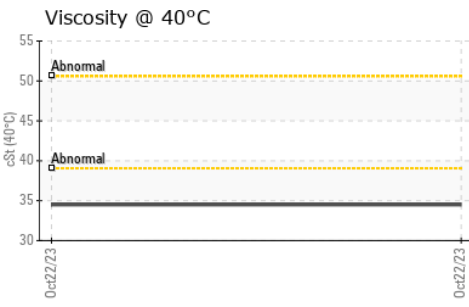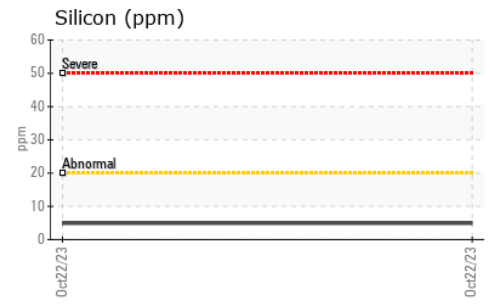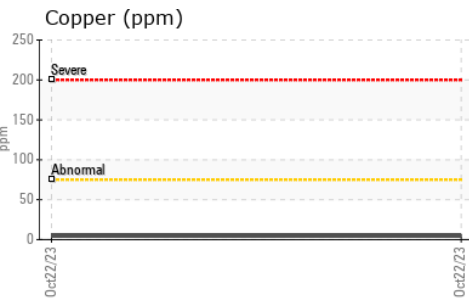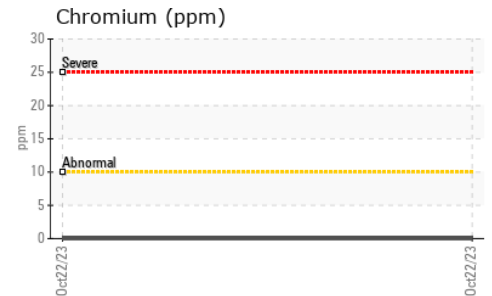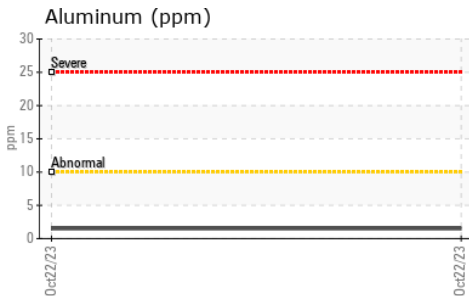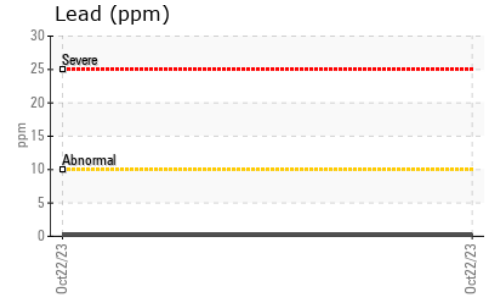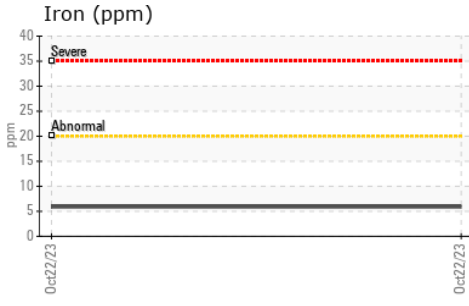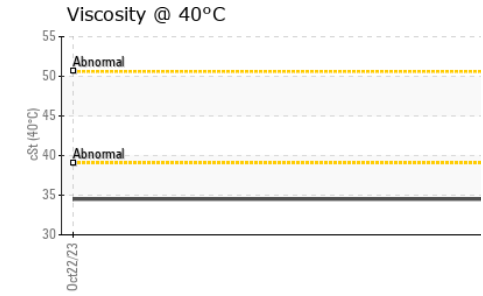

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0019945 **Received** : 23 Oct 2023
Lab Number : 02591198 **Diagnosed** : 25 Oct 2023
Unique Number : 5668277 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Cool, KF)

Wajax Power Systems
 2997 AV. WATT
 Quebec, QC
 CA G1X 3W1
 Contact: Joe Di Pede
 jdipede@wajax.com
 T: (418)651-5371
 F: (418)651-4448

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.