



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Area
[62819]
Machine Id
VOLVO VNR660 4604

Component
Diesel Engine
Fluid
PETRO CANADA DURON SAE 10W30 (--- GAL)



DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

Wear

Nickel ppm levels are severe. Iron ppm levels are abnormal. Cylinder, crank, or cam shaft wear is indicated. Exhaust valve wear is indicated.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0869676 | --- | --- |
| Sample Date | Client Info | | 20 Oct 2023 | --- | --- |
| Machine Age | mths | Client Info | 24 | --- | --- |
| Oil Age | mths | Client Info | 9 | --- | --- |
| Oil Changed | Client Info | | Changed | --- | --- |
| Sample Status | | | SEVERE | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >6.0 | <1.0 | --- | --- |
| Glycol | WC Method | | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|-------------|--------------------|--------------|----------|----------|
| PQ | ASTM D8184* | | 0 | --- | --- |
| Iron | ppm | ASTM D5185(m) >100 | ▲ 123 | --- | --- |
| Chromium | ppm | ASTM D5185(m) >20 | 2 | --- | --- |
| Nickel | ppm | ASTM D5185(m) >2 | ◆ 9 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) >2 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) >25 | 9 | --- | --- |
| Lead | ppm | ASTM D5185(m) >40 | 6 | --- | --- |
| Copper | ppm | ASTM D5185(m) >330 | 64 | --- | --- |
| Tin | ppm | ASTM D5185(m) >15 | 3 | --- | --- |
| Antimony | ppm | ASTM D5185(m) | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Beryllium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185(m) | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 1 | 7 | --- | --- |
| Barium | ppm | ASTM D5185(m) 1 | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) 1 | 23 | --- | --- |
| Manganese | ppm | ASTM D5185(m) 1 | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) 10 | 274 | --- | --- |
| Calcium | ppm | ASTM D5185(m) 2942 | 2221 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) 1102 | 889 | --- | --- |
| Zinc | ppm | ASTM D5185(m) 1351 | 1176 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) 3903 | 2429 | --- | --- |
| Lithium | ppm | ASTM D5185(m) | <1 | --- | --- |

CONTAMINANTS


| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >25 | 14 | --- | --- |
| Sodium | ppm | ASTM D5185(m) | 7 | --- | --- |
| Potassium | ppm | ASTM D5185(m) >20 | 13 | --- | --- |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|---------|-----------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* >3 | 1.4 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* >20 | 12.4 | --- | --- |
| Sulfation | Abs.1mm | ASTM D7415* >30 | 30.3 | --- | --- |



OIL ANALYSIS REPORT

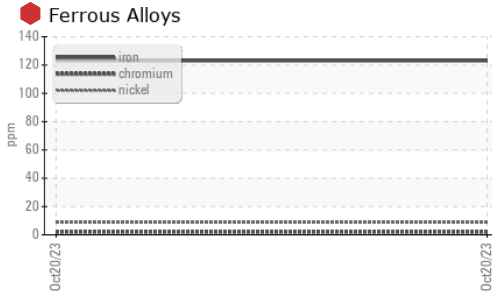

FLUID DEGRADATION

| Method | Limit/Base | Current | History1 | History2 |
|-----------|----------------------|---------|----------|----------|
| Oxidation | Abs./1mm ASTM D7414* | 23.3 | --- | --- |










VISUAL

| Method | Limit/Base | Current | History1 | History2 |
|------------------|----------------|---------|----------|----------|
| Emulsified Water | scalar Visual* | NEG | --- | --- |
| Free Water | scalar Visual* | NEG | --- | --- |

FLUID PROPERTIES

| Method | Limit/Base | Current | History1 | History2 |
|--------------|-------------------|---------|----------|----------|
| Visc @ 100°C | cSt ASTM D7279(m) | 11.7 | --- | --- |

GRAPHS

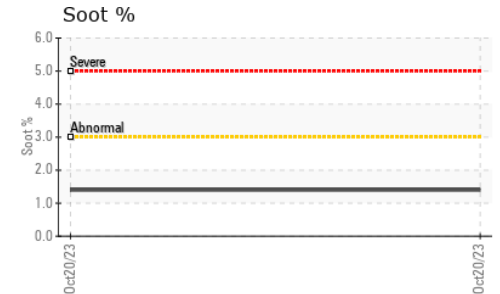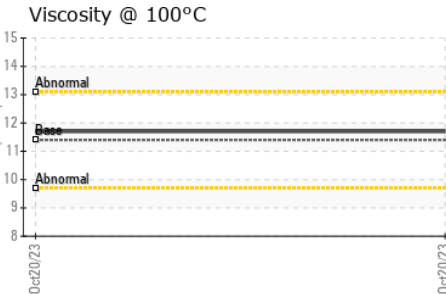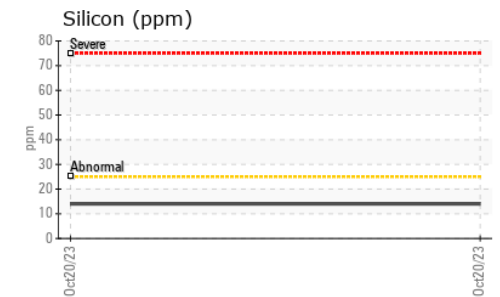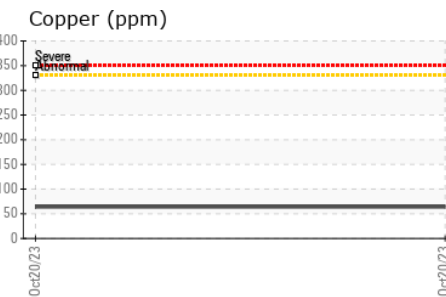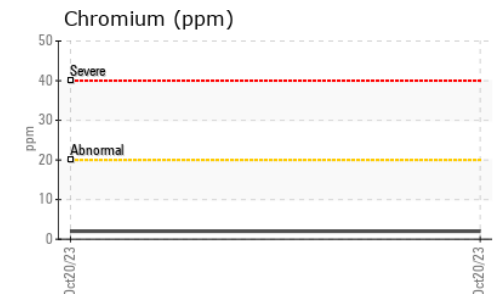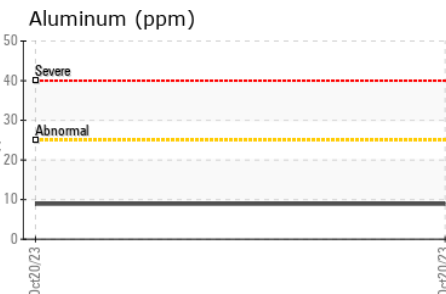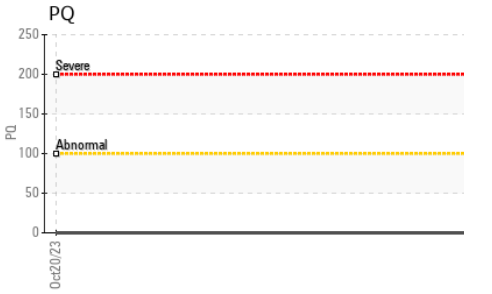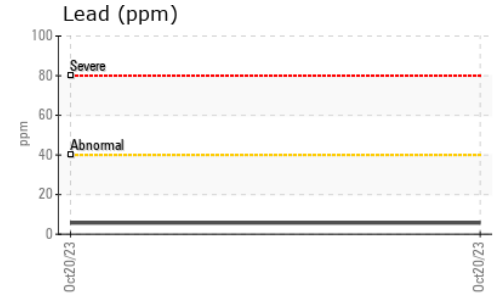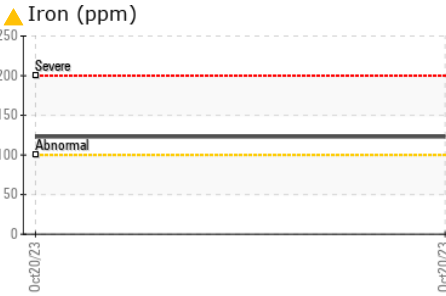

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 PERFORMANCE EQUIPMENT - VISION TRUCK
Sample No. : WC0869676 **Received** : 24 Oct 2023 415 EVANS AVENUE
Lab Number : 02591314 **Diagnosed** : 25 Oct 2023 ETOBICOKE, ON
Unique Number : 5668393 **Diagnostician** : Kevin Marson CA M8W 0B3
Test Package : MOB 1 (Additional Tests: PQ) Contact: Service

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

etobservice@visiontruckgroup.com

T:

F: