




# OIL ANALYSIS REPORT

Sample Rating Trend

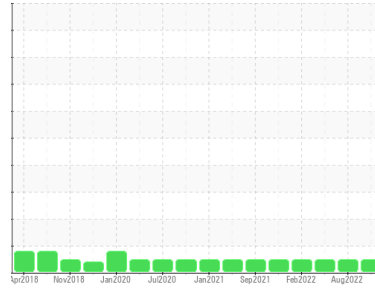

**NORMAL**



Area  
**[412498400]**  
 Machine Id  
**2260 (GARAGE HOTSY) (S/N 15-GTOHP687)**  
 Component  
**Pump**  
 Fluid  
**TOTAL FINA NEVASTANE FG AW 68 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0848523</b>	WC0728033	WC0696293
Sample Date	Client Info	<b>25 Sep 2023</b>	03 Aug 2022	08 May 2022
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
PQ	ASTM D8184*	<b>0</b>	0	0	
Iron	ppm	ASTM D5185(m) >90	<b>4</b>	5	5
Chromium	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m) >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m) >7	<b>0</b>	0	<1
Lead	ppm	ASTM D5185(m) >12	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m) >30	<b>4</b>	5	5
Tin	ppm	ASTM D5185(m) >9	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	1	<1
Calcium	ppm	ASTM D5185(m)	<b>&lt;1</b>	1	2
Phosphorus	ppm	ASTM D5185(m)	<b>185</b>	168	181
Zinc	ppm	ASTM D5185(m)	<b>19</b>	22	23
Sulfur	ppm	ASTM D5185(m)	<b>271</b>	361	349
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >60	<b>2</b>	2	2
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.45</b>	0.41	0.34




# OIL ANALYSIS REPORT

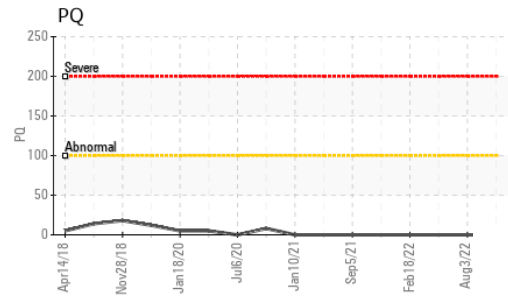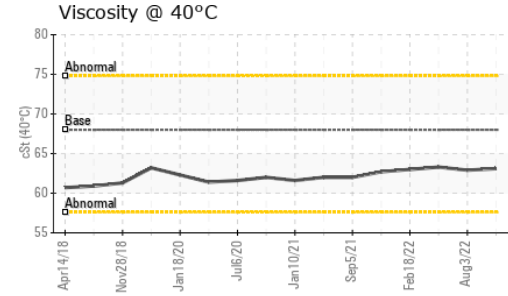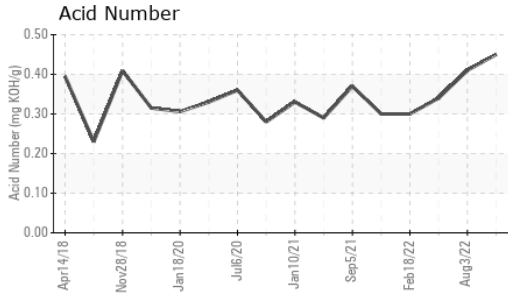







VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	63.1	62.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

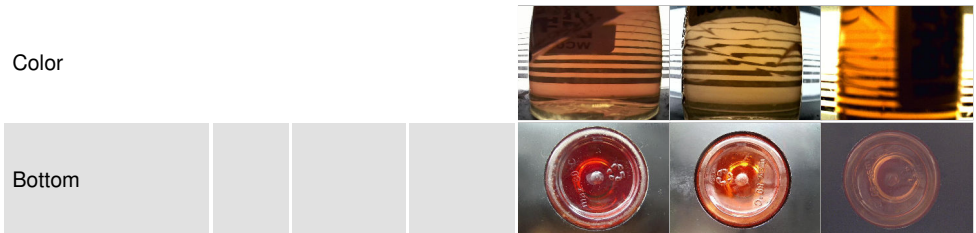

## GRAPHS

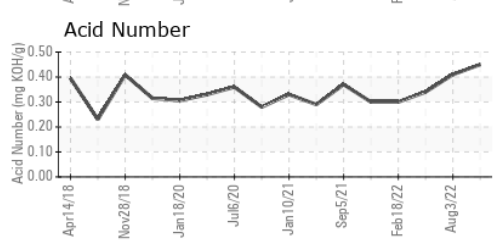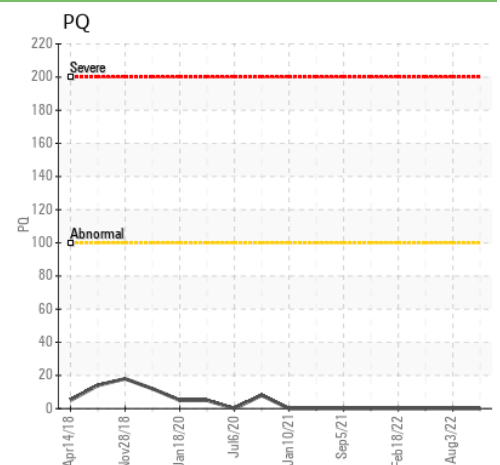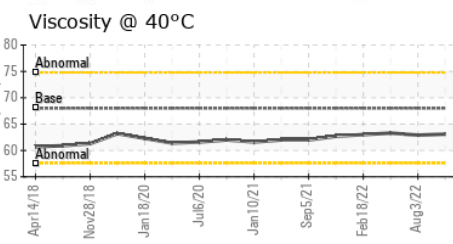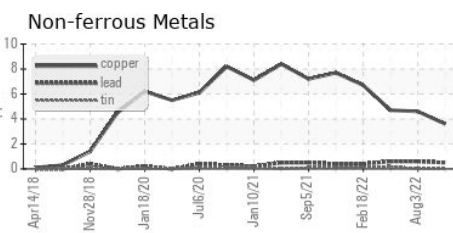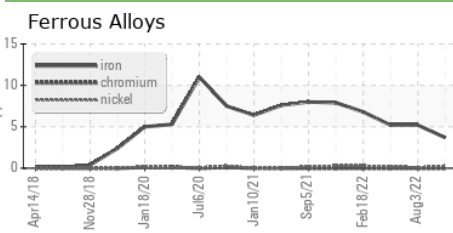

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0848523 **Received** : 24 Oct 2023  
**Lab Number** : 02591396 **Diagnosed** : 25 Oct 2023  
**Unique Number** : 5668475 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**Cargill Meat Solutions**  
 165 Dunlop Drive  
 Guelph, ON  
 CA N1L 1P4  
 Contact: Jakub Posluszny  
 jakub\_posluszny@cargill.com  
 T: (519)823-5200  
 F: (519)823-5893

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.