OIL ANALYSIS REPORT

Sample Rating Trend

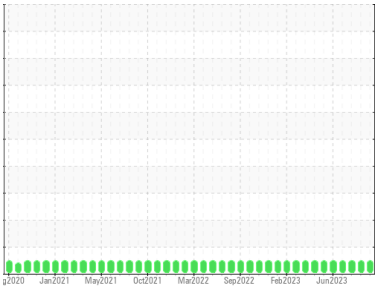

NORMAL

Area
ENGINE ROOM FLOOR
Machine Id
22-BE-6462C-02 PROPELLER SHAFT BEARING (S/N Maint Plan 22480)
Component
Starboard Bearing
Fluid
NOT GIVEN (12 LTR)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PP**	PP	PP
Sample Date		Client Info		**11 Sep 2023**	11 Sep 2023	23 Aug 2023
Machine Age	hrs	Client Info		**0**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		**0**	0	0
Iron	ppm	ASTM D5185(m)	>20	**3**	4	3
Chromium	ppm	ASTM D5185(m)	>2	**0**	0	0
Nickel	ppm	ASTM D5185(m)	>2	**0**	<1	0
Titanium	ppm	ASTM D5185(m)		**0**	0	0
Silver	ppm	ASTM D5185(m)		**<1**	<1	<1
Aluminum	ppm	ASTM D5185(m)	>5	**2**	2	2
Lead	ppm	ASTM D5185(m)	>25	**<1**	<1	<1
Copper	ppm	ASTM D5185(m)	>5	**<1**	<1	<1
Tin	ppm	ASTM D5185(m)	>15	**1**	2	1
Antimony	ppm	ASTM D5185(m)		**0**	0	0
Vanadium	ppm	ASTM D5185(m)		**0**	0	0
Beryllium	ppm	ASTM D5185(m)		**0**	0	0
Cadmium	ppm	ASTM D5185(m)		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		**2**	4	<1
Barium	ppm	ASTM D5185(m)		**<1**	<1	0
Molybdenum	ppm	ASTM D5185(m)		**0**	0	<1
Manganese	ppm	ASTM D5185(m)		**0**	0	<1
Magnesium	ppm	ASTM D5185(m)		**22**	22	22
Calcium	ppm	ASTM D5185(m)		**6467**	6462	6014
Phosphorus	ppm	ASTM D5185(m)		**215**	219	225
Zinc	ppm	ASTM D5185(m)		**374**	372	357
Sulfur	ppm	ASTM D5185(m)		**5408**	5675	4971
Lithium	ppm	ASTM D5185(m)		**<1**	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	**11**	11	11
Sodium	ppm	ASTM D5185(m)		**1**	1	1
Potassium	ppm	ASTM D5185(m)	>20	**<1**	<1	2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		**1.41**	1.53	1.25

OIL ANALYSIS REPORT

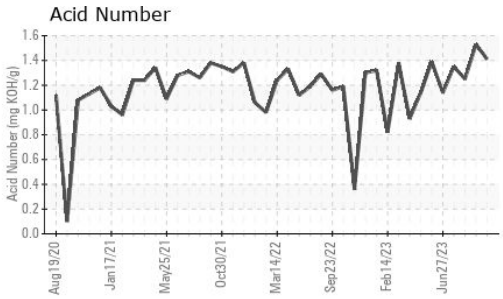

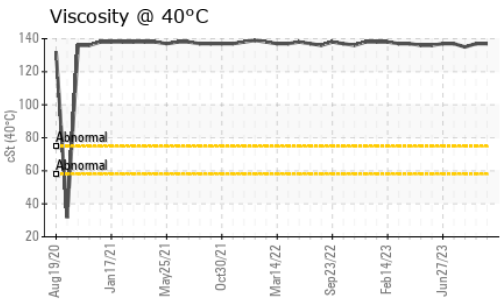

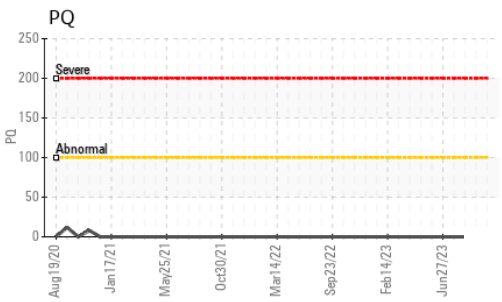

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Precipitate	scalar	Visual*	NONE	**NONE**	NONE	NONE
Silt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Debris	scalar	Visual*	NONE	**VLITE**	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Appearance	scalar	Visual*	NORML	**NORML**	NORML	NORML
Odor	scalar	Visual*	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	**NEG**	NEG	NEG
Free Water	scalar	Visual*		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		**137**	137	135

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

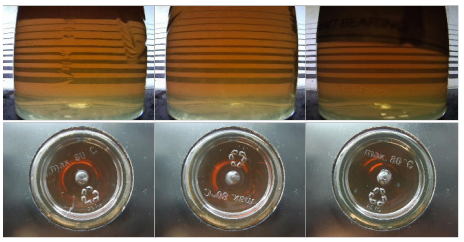

GRAPHS

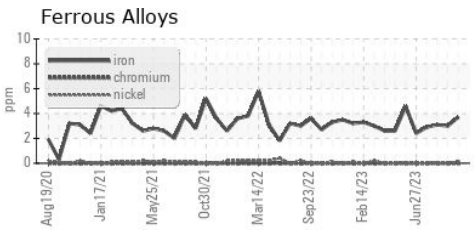

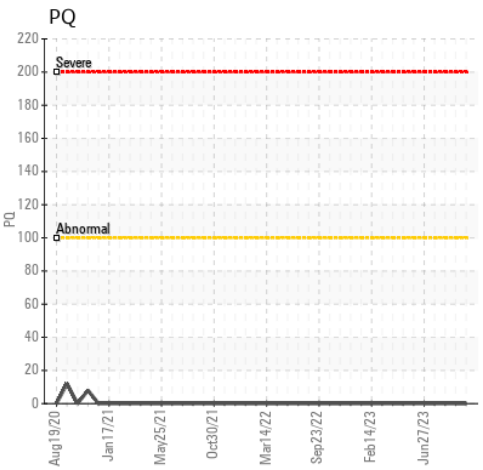

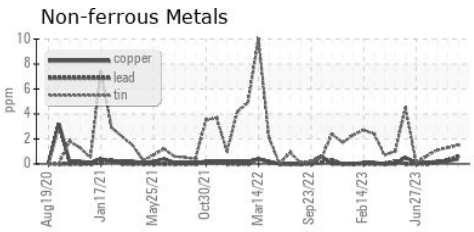

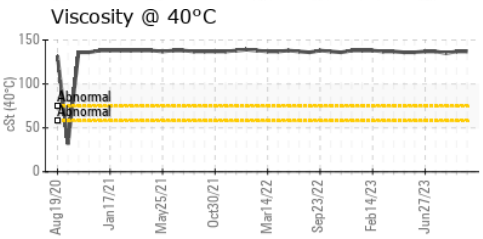

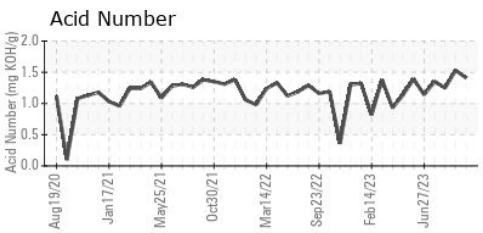

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **HUSKY SEA ROSE /AKER SOLUTIONS**
Sample No. : PP **Received** : 24 Oct 2023
Lab Number : 02591536 **Diagnosed** : 26 Oct 2023
Unique Number : 5668615 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: TAN Man)

PO BOX 20
ST. JOHN`S, NL
CA A1C 6C9
Contact: Maintenance Supervisor
maintsuper.searose@huskyenergy.ca
T: x:
F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.