



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[6318]
 Machine Id
TR134

Component
Diesel Engine
 Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0846134	---	---
Sample Date	Client Info			19 Oct 2023	---	---
Machine Age	kms	Client Info		26852	---	---
Oil Age	kms	Client Info		0	---	---
Oil Changed	Client Info			Not Chngd	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<1.0	---	---
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>165	28	---	---
Chromium	ppm	ASTM D5185(m)	>5	1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	33	---	---
Lead	ppm	ASTM D5185(m)	>150	2	---	---
Copper	ppm	ASTM D5185(m)	>90	6	---	---
Tin	ppm	ASTM D5185(m)	>5	1	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	28	---	---
Barium	ppm	ASTM D5185(m)	10	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	4	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	450	735	---	---
Calcium	ppm	ASTM D5185(m)	3000	1344	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	694	---	---
Zinc	ppm	ASTM D5185(m)	1350	779	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2453	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>35	14	---	---
Sodium	ppm	ASTM D5185(m)		4	---	---
Potassium	ppm	ASTM D5185(m)	>20	103	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>7.5	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.1	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.5	---	---











OIL ANALYSIS REPORT

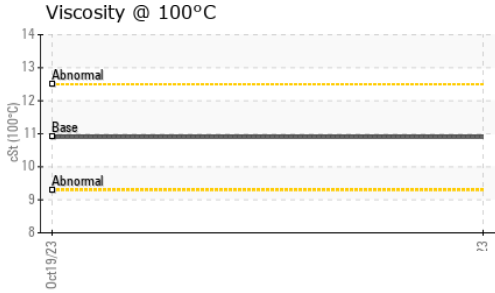

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	10.9	---

GRAPHS

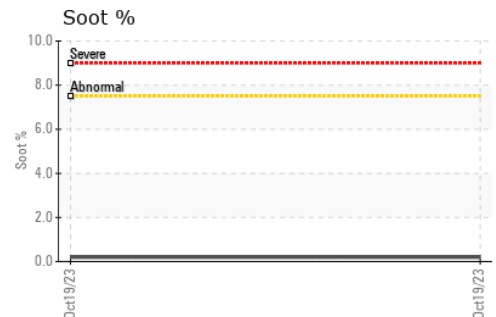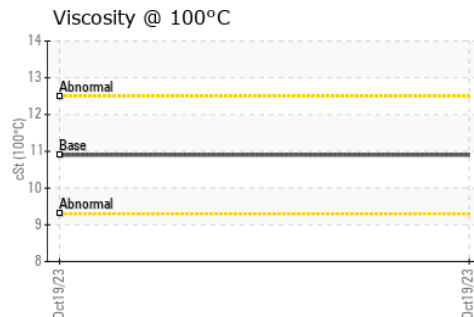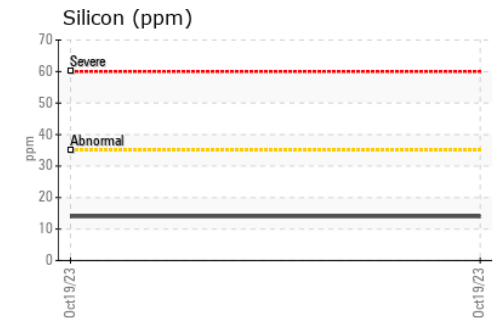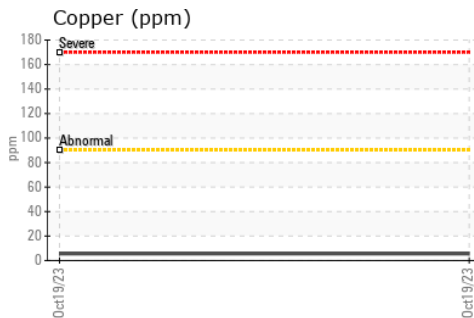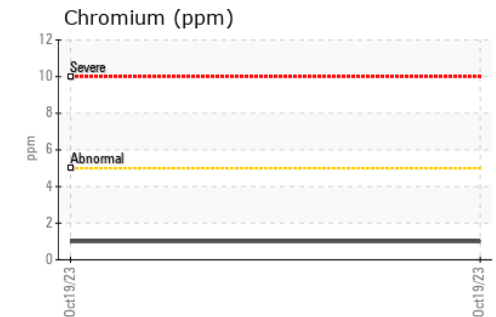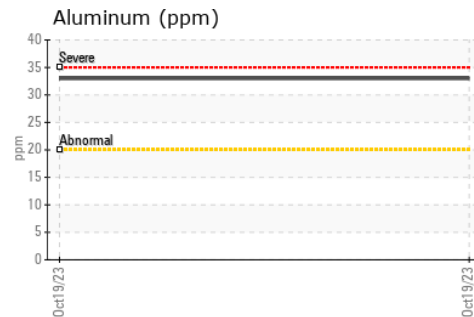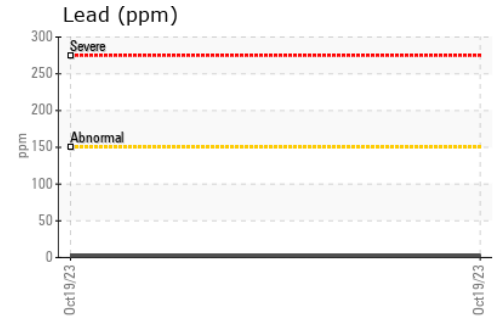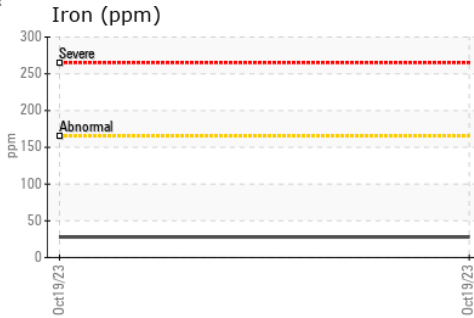

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0846134 **Received** : 25 Oct 2023
Lab Number : 02591609 **Diagnosed** : 25 Oct 2023
Unique Number : 5668688 **Diagnostician** : Wes Davis
Test Package : MOB 1

CANADA CLEAN FUELS
 4425 CHESSWOOD DR
 TORONTO, ON
 CA M3J 2C2
 Contact: Rory Grant
 rgrant@canadacleanfuels.com
 T: (647)882-6850
 F: (416)521-9368

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.