




# OIL ANALYSIS REPORT

Sample Rating Trend

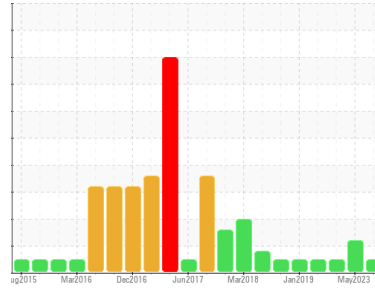

**NORMAL**



Area  
**[4813]**  
 Machine Id  
**NEW FLYER 1101**  
 Component  
**Rear Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (26 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0843560</b>	WC0780462	WC0737217
Sample Date	Client Info		<b>11 Oct 2023</b>	30 May 2023	05 Nov 2022
Machine Age	kms	Client Info	<b>378571</b>	360868	0
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	0.0	0.0

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	<b>6</b>	7	8
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>100	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	<b>14</b>	60	70
Barium	ppm	ASTM D5185(m)	10	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>8</b>	15	16
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>39</b>	85	121
Calcium	ppm	ASTM D5185(m)	3000	<b>2171</b>	2265	2122
Phosphorus	ppm	ASTM D5185(m)	1150	<b>857</b>	1038	1001
Zinc	ppm	ASTM D5185(m)	1350	<b>977</b>	1168	1121
Sulfur	ppm	ASTM D5185(m)	4250	<b>2997</b>	2938	2837
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>7</b>	5	4
Sodium	ppm	ASTM D5185(m)	>158	<b>2</b>	16	6
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	▲ 46	15

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0</b>	0.6	0.4
Nitration	Abs/cm	ASTM D7624*	>20	<b>5.5</b>	9.8	9.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>16.0</b>	24.5	24.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>9.8</b>	21.1	19.6











# OIL ANALYSIS REPORT

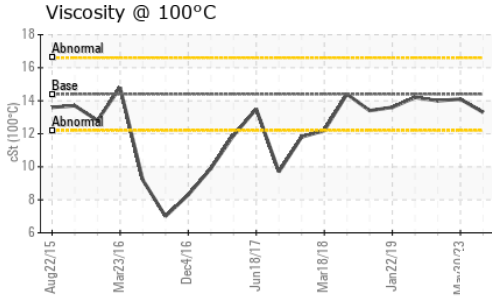

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.3	14.1

## GRAPHS

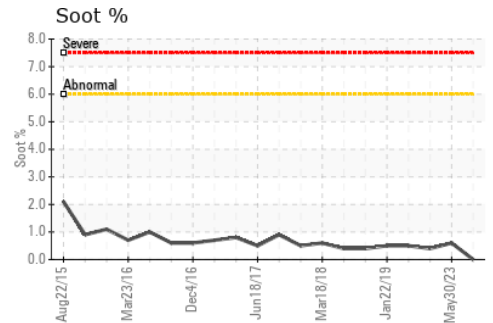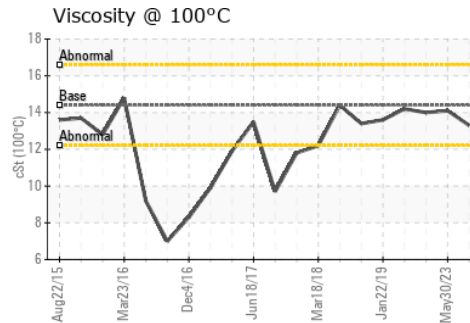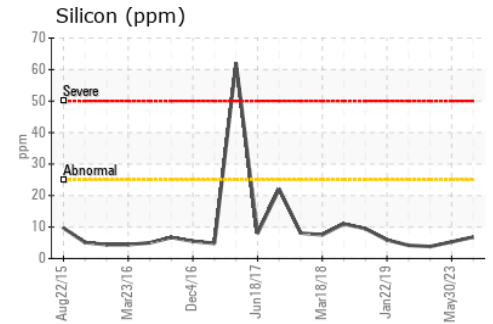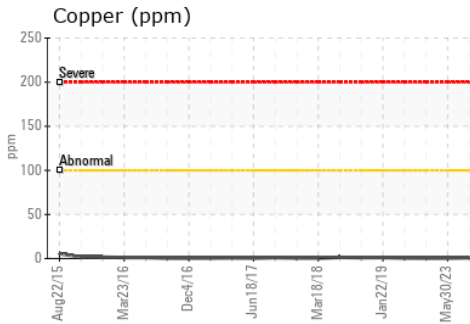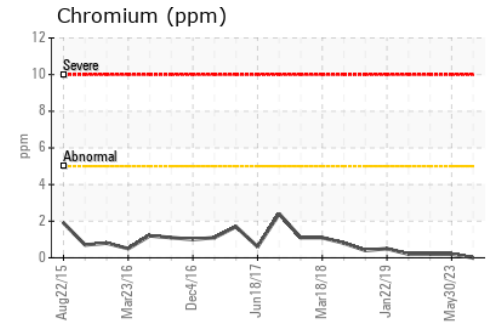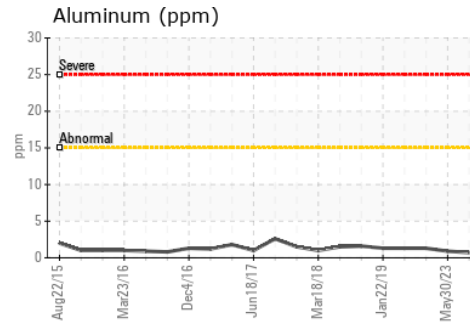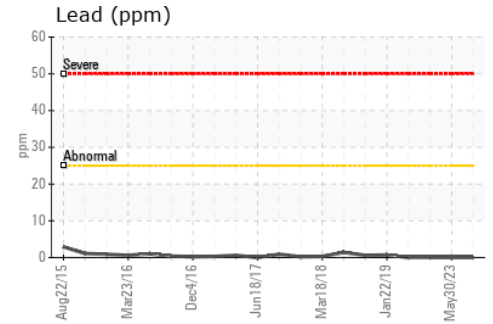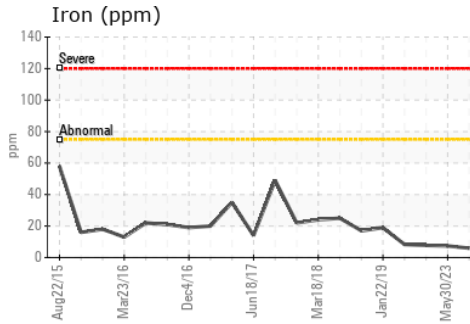

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0843560  
**Lab Number** : 02591719  
**Unique Number** : 5668798  
**Test Package** : MOB 1  
**Received** : 25 Oct 2023  
**Diagnosed** : 26 Oct 2023  
**Diagnostician** : Wes Davis

**MVT Canadian Bus**  
 133 Welham Road  
 Barrie, ON  
 CA L4N 8Y3  
 Contact: Frank Mastromarco  
 frank.mastromarco@mvttransit.com  
 T: (709)792-5033  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.