




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
CATERPILLAR R1300G SCP210
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

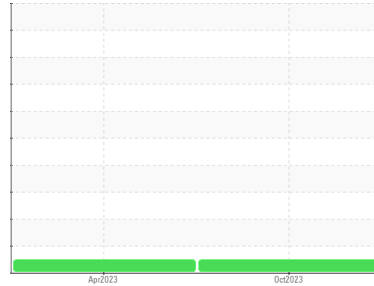

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0788012	WC0766044	---
Sample Date	Client Info		16 Oct 2023	17 Apr 2023	---
Machine Age	hrs	Client Info	10970	10539	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	35	8	---
Chromium	ppm	ASTM D5185(m) >20	<1	0	---
Nickel	ppm	ASTM D5185(m) >2	<1	<1	---
Titanium	ppm	ASTM D5185(m) >2	0	<1	---
Silver	ppm	ASTM D5185(m) >2	<1	0	---
Aluminum	ppm	ASTM D5185(m) >25	2	1	---
Lead	ppm	ASTM D5185(m) >40	<1	<1	---
Copper	ppm	ASTM D5185(m) >330	5	2	---
Tin	ppm	ASTM D5185(m) >15	<1	0	---
Antimony	ppm	ASTM D5185(m)	0	<1	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	75	141	---
Barium	ppm	ASTM D5185(m) 10	<1	0	---
Molybdenum	ppm	ASTM D5185(m) 100	22	11	---
Manganese	ppm	ASTM D5185(m)	0	<1	---
Magnesium	ppm	ASTM D5185(m) 450	256	153	---
Calcium	ppm	ASTM D5185(m) 3000	2142	2011	---
Phosphorus	ppm	ASTM D5185(m) 1150	882	961	---
Zinc	ppm	ASTM D5185(m) 1350	1097	1041	---
Sulfur	ppm	ASTM D5185(m) 4250	2512	2733	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	6	5	---
Sodium	ppm	ASTM D5185(m) >158	4	3	---
Potassium	ppm	ASTM D5185(m) >20	5	3	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.6	0	---
Nitration	Abs/cm	ASTM D7624* >20	10.4	5.5	---
Sulfation	Abs/.1mm	ASTM D7415* >30	24.5	21.0	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	23.3	16.7	---











OIL ANALYSIS REPORT

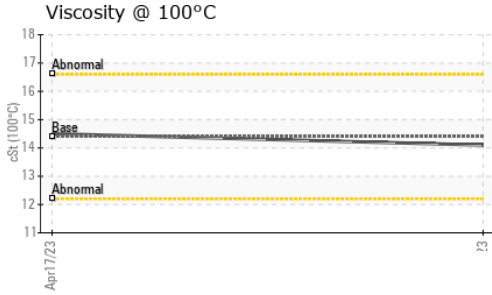

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.5	---

GRAPHS

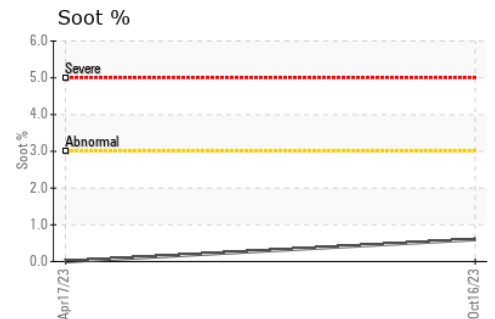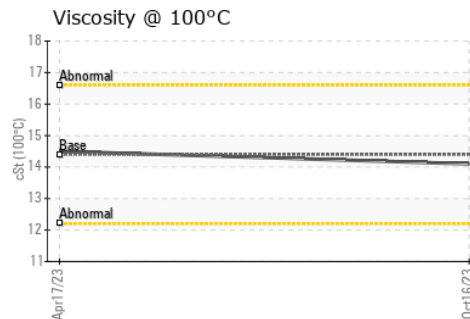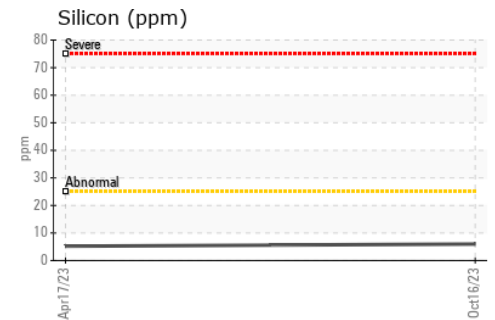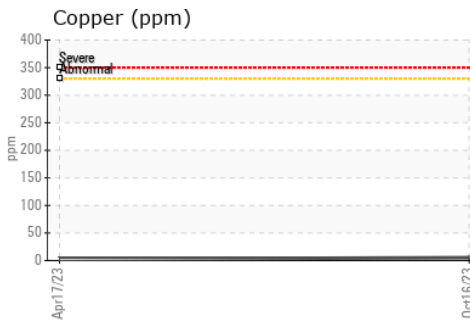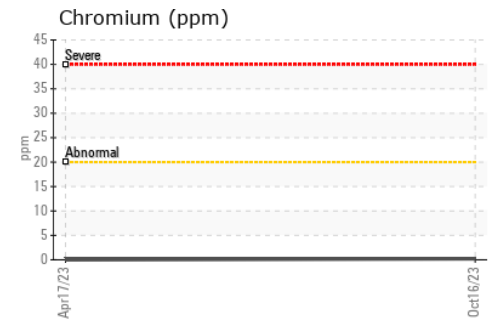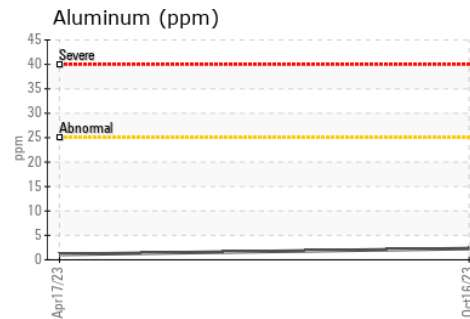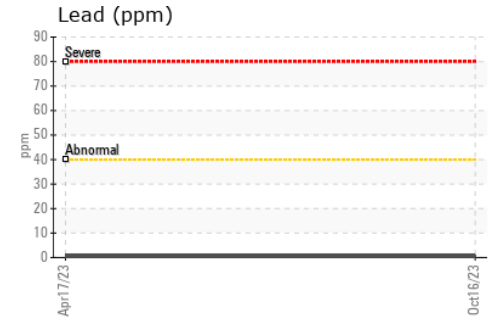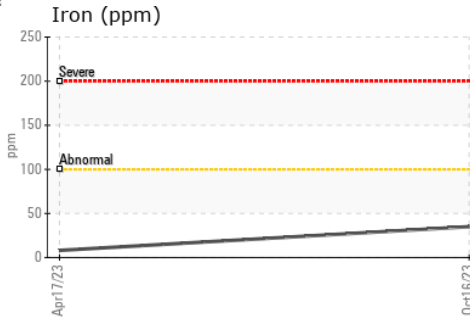

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0788012
Lab Number : 02591996
Unique Number : 5669075
Test Package : MOB 1

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Tony Tees
 tony.tees@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.