


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



SAB2 Machine Id SAB2 G14

Component **Thrust Bearing**

ESSO TERESSO ISO 46 (5000 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

12013 Nov2014 Jan2016 Aug2017 Jan2019 Apr2020 Ju2021 Oct2022							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0858069	WC0830369	WC0780515	
Sample Date		Client Info		25 Oct 2023	31 Jul 2023	05 Jun 2023	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>85	1	2	2	
Chromium	ppm	ASTM D5185(m)	>20	0	0	0	
Nickel	ppm	ASTM D5185(m)	>20	0	<1	<1	
Titanium	ppm	ASTM D5185(m)		0	0	0	
Silver	ppm	ASTM D5185(m)		<1	0	0	
A I		AOTM DEADE()	40	•	0	4	


Aluminum	ppm	ASTM D5185(m)	>40	0	0	<1
Lead	ppm	ASTM D5185(m)	>60	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>7	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>40	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	nnm	ASTM D5185(m)		0	0	0

		١ /				
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	0	0	0	<1
Calcium	ppm	ASTM D5185(m)	0	<1	<1	0
Phosphorus	ppm	ASTM D5185(m)	2.4	2	2	<1
Zinc	ppm	ASTM D5185(m)	0	2	2	1
Sulfur	ppm	ASTM D5185(m)		1975	2174	2031
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINANTS met		method				history2

CONTAMINANTS		memou			HISTOLAL	HISTOLYZ
Silicon	ppm	ASTM D5185(m)	>20	2	2	2
Sodium	ppm	ASTM D5185(m)		<1	0	0
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
FLUID CLEANLINESS		method				history2
Particles >4µm		ASTM D7647	>10000	127	235	515
Particles >6µm		ASTM D7647	>1300	30	42	111
Particles >14µm		ASTM D7647	>160	3	6	13
Particles >21µm		ASTM D7647	>40	2	3	5
Particles >38µm		ASTM D7647	>10	0	1	1
Particles >71µm		ASTM D7647	>3	0	1	0
Oil Cleanliness		ISO 4406 (c)	>20/17/14	14/12/9	15/13/10	16/14/11
FLUID DECDADA	TION					٠٠ ٠٠ ٠٠ ٠٠ ٠٠


FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN) mg KOH/g ASTM D974* 0.02 0.14 0.08 0.11

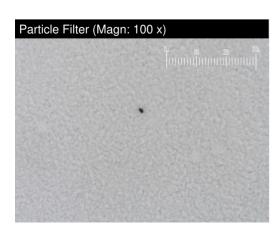



OIL ANALYSIS REPORT

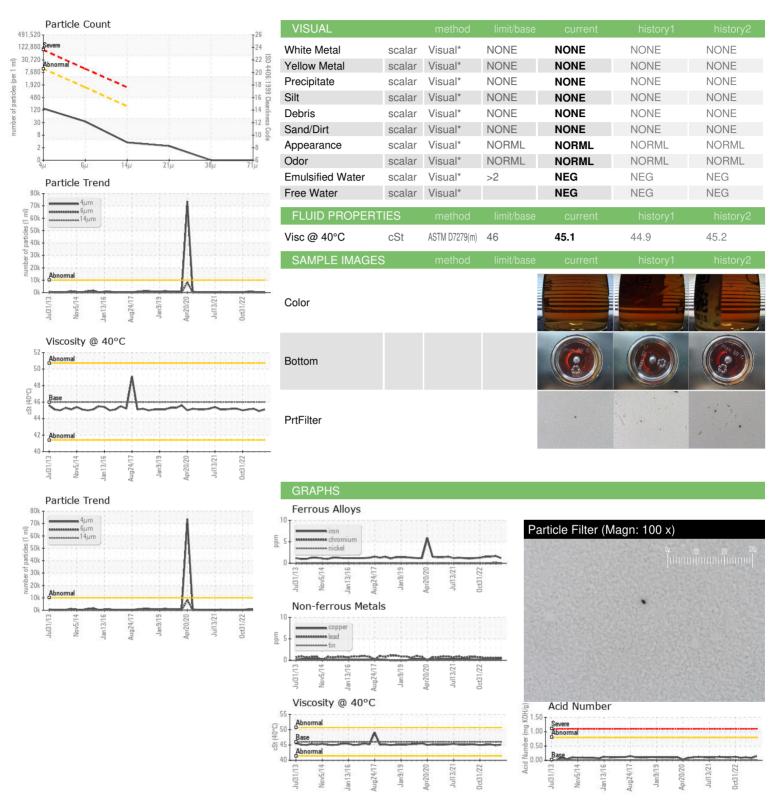





Laboratory Sample No. Lab Number **Unique Number**

: 02592139 : 5669218

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 26 Oct 2023 : WC0858069

Diagnosed : 30 Oct 2023 Diagnostician : Kevin Marson

Ontario Power Generation NIAGARA PLANT GROUP,, 14000 NIAGARA PKWY NIAGARA ON THE LAKE, ON

CA LOS 1J0 alex.courtemanche@opg.com

Test Package : IND 2 (Additional Tests: BottomAnalysis, FilterPatch, PrtFilter, TAN Macontact: Alex Courtemanche To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

T: (905)357-0322 F: (905)357-6558