



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**T001388 (S/N 23-M-08-2560)**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (--- GAL)**

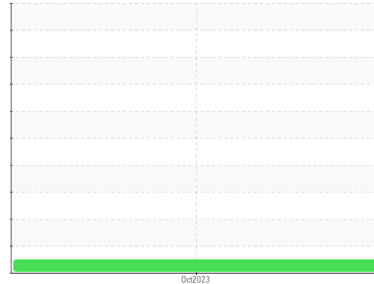

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0848433</b>	---	---
Sample Date	Client Info		<b>24 Oct 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	---
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	---
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	---
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	---
Magnesium	ppm	ASTM D5185(m)	0	<b>1</b>	---
Calcium	ppm	ASTM D5185(m)	100	<b>101</b>	---
Phosphorus	ppm	ASTM D5185(m)	670	<b>639</b>	---
Zinc	ppm	ASTM D5185(m)	850	<b>835</b>	---
Sulfur	ppm	ASTM D5185(m)	1600	<b>1499</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>3802</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>403</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>16</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>3</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/16/11</b>	---	---



# OIL ANALYSIS REPORT

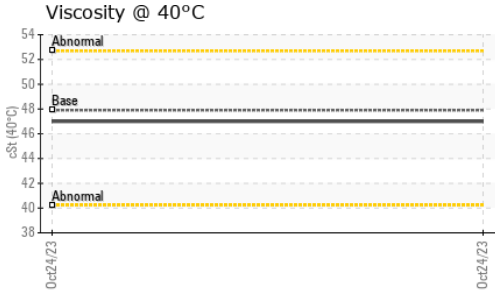





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	<b>47.0</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

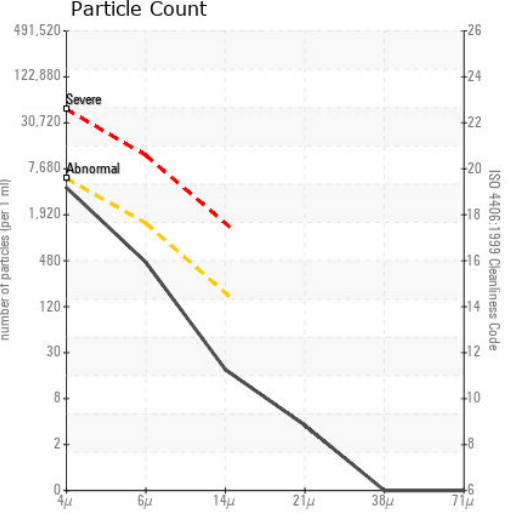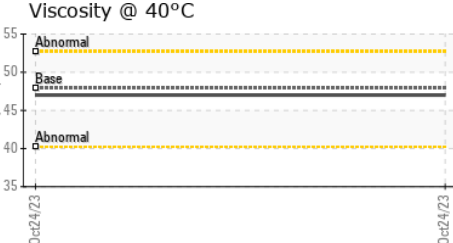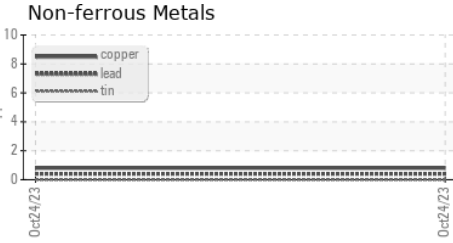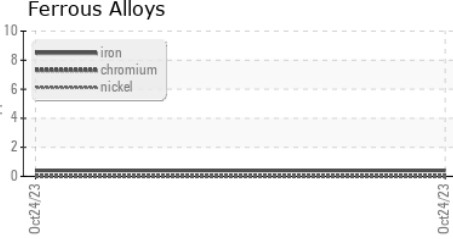

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0848433      **Received** : 26 Oct 2023  
**Lab Number** : **02592144**      **Diagnosed** : 30 Oct 2023  
**Unique Number** : 5669223      **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**RWF Industries**  
 873 Devonshire Ave.  
 Woodstock, ON  
 CA N4S 8Z4  
 Contact: Henry Schepers  
 henrys@rwfbron.com  
 T:  
 F: (519)421-0028

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.