


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



EPIROC SX1030 SCP218

Component

Front Differential

PENNZOIL SYNTHETIC SAE 75W140 GL-5

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The condition of the oil is acceptable for the time in service.

(GAL)						
<u> </u>				Oct2023		
SAMPLE INFORM	NOITAN	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0865520		
Sample Date		Client Info		09 Oct 2023		
Machine Age	hrs	Client Info		3739		
Oil Age	hrs	Client Info		500		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>500	32		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		2		
Aluminum	ppm	ASTM D5185(m)	>25	2		
Lead	ppm	ASTM D5185(m)	>25	0		
Copper	ppm	ASTM D5185(m)	>100	8		
Tin	ppm	ASTM D5185(m)	>100	<1		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Bervllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
	ррпп					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		224		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		2		
Calcium	ppm	ASTM D5185(m)		17		
Phosphorus	ppm					
7ina	ppiii	ASTM D5185(m)		919		
Zinc	ppm	ASTM D5185(m) ASTM D5185(m)		919 11		
Sulfur						
	ppm	ASTM D5185(m)		11		
Sulfur	ppm ppm	ASTM D5185(m) ASTM D5185(m)	limit/base	11 19037		
Sulfur Lithium CONTAMINANTS	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method		11 19037 <1	 	
Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m)	limit/base >75	11 19037 <1 current	 history1	 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	>75	11 19037 <1 current 7	 history1	 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>75 >20	11 19037 <1 current 7 1	 history1 	 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method	>75 >20 limit/base	11 19037 <1 current 7 1 <1	history1	history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual*	>75 >20 limit/base NONE	11 19037 <1 current 7 1 <1 current NONE	history1 history1 history1	history2 history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal	ppm ppm ppm ppm ppm ppm ppm scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual*	>75 >20 limit/base NONE NONE	11 19037 <1 current 7 1 <1 current NONE NONE	history1 history1 history1	history2 history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate	ppm ppm ppm ppm ppm ppm scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual* Visual* Visual*	>75 >20 limit/base NONE NONE NONE	11 19037 <1 current 7 1 <1 current NONE NONE NONE	history1 history1	history2 history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt	ppm ppm ppm ppm ppm ppm scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Wethod Visual* Visual* Visual*	>75 >20 limit/base NONE NONE NONE NONE	11 19037 <1 current 7 1 <1 current NONE NONE NONE NONE	history1 history1 history1	history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris	ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Wethod Visual* Visual* Visual* Visual* Visual* Visual*	>75 >20 limit/base NONE NONE NONE NONE NONE NONE	11 19037 <1 current 7 1 <1 current NONE NONE NONE NONE VLITE	history1 history1	history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual* Visual* Visual* Visual* Visual* Visual*	>75 >20 limit/base NONE NONE NONE NONE NONE NONE NONE	11 19037 <1 current 7 1 <1 current NONE NONE NONE NONE VLITE NONE	history1 history1 history1	history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual* Visual* Visual* Visual* Visual* Visual* Visual* Visual*	>75 >20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	11 19037 <1 current 7 1 <1 current NONE NONE NONE NONE NONE NONE VLITE NONE NORML	history1 history1	history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual* Visual* Visual* Visual* Visual* Visual*	>75 >20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	11 19037 <1 current 7 1 <1 current NONE NONE NONE NONE VLITE NONE	history1 history1	history2 history2
Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual* Visual* Visual* Visual* Visual* Visual* Visual* Visual*	>75 >20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	11 19037 <1 current 7 1 <1 current NONE NONE NONE NONE NONE NONE VLITE NONE NORML	history1 history1	history2 history2



OIL ANALYSIS REPORT

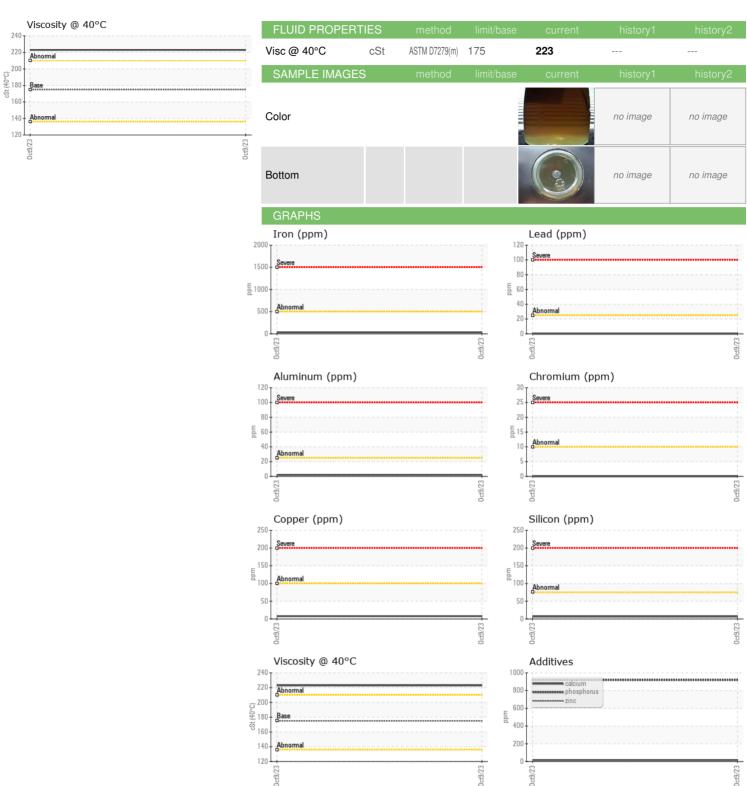



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WC0865520 : 02592192 : 5669271 Test Package : MOB 1

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 26 Oct 2023

Diagnosed : 26 Oct 2023 Diagnostician : Wes Davis

Agnico Eagle Canada 1350 Government Rd. W, MACASSA COMPLEX

Kirkland Lake, ON **CA P2N 3J1**

Contact: Mitch Lamontagne

AEM_KL_macassaoilsampleresults@agnicoeagle.com

T: (705)567-5208

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

F: (705)567-5221