




OIL ANALYSIS REPORT

Sample Rating Trend

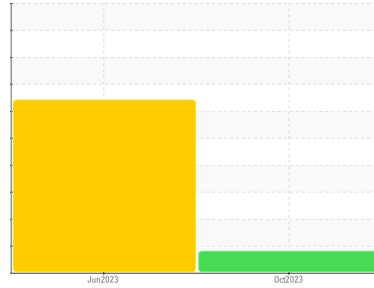

FUEL



Area
CFR#72359 [202157]
 Machine Id
LEOPARD 2A4CAN
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- LTR)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0848501	WC0848500	---
Sample Date	Client Info			24 Oct 2023	15 Jun 2023	---
Machine Age	hrs	Client Info		195	194	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			Not Chngd	Not Chngd	---
Sample Status				MARGINAL	SEVERE	---

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	▲ 0.025	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>101	6	29	---
Chromium	ppm	ASTM D5185(m)	>16	<1	2	---
Nickel	ppm	ASTM D5185(m)	>6	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)	>3	<1	<1	---
Aluminum	ppm	ASTM D5185(m)	>21	2	9	---
Lead	ppm	ASTM D5185(m)	>41	1	6	---
Copper	ppm	ASTM D5185(m)	>21	3	23	---
Tin	ppm	ASTM D5185(m)	>13	<1	4	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	1	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	9	5	---
Barium	ppm	ASTM D5185(m)	10	<1	<1	---
Molybdenum	ppm	ASTM D5185(m)	100	42	41	---
Manganese	ppm	ASTM D5185(m)		0	1	---
Magnesium	ppm	ASTM D5185(m)	450	644	550	---
Calcium	ppm	ASTM D5185(m)	3000	1261	1101	---
Phosphorus	ppm	ASTM D5185(m)	1150	834	810	---
Zinc	ppm	ASTM D5185(m)	1350	992	935	---
Sulfur	ppm	ASTM D5185(m)	4250	2389	1992	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>16	6	16	---
Sodium	ppm	ASTM D5185(m)	>158	6	▲ 36	---
Potassium	ppm	ASTM D5185(m)	>20	0	2	---
Fuel	%	ASTM D7593*	>5	▲ 4.3	◆ 27.2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0	0.3	---
Nitration	Abs/cm	ASTM D7624*	>20	4.5	8.4	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.1	18.7	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.4	13.0	---











OIL ANALYSIS REPORT

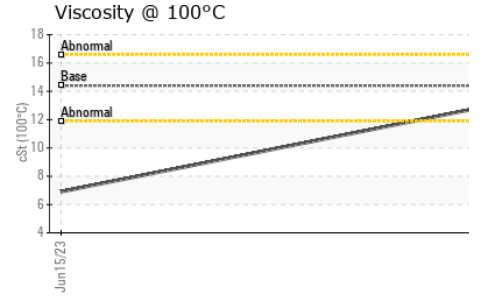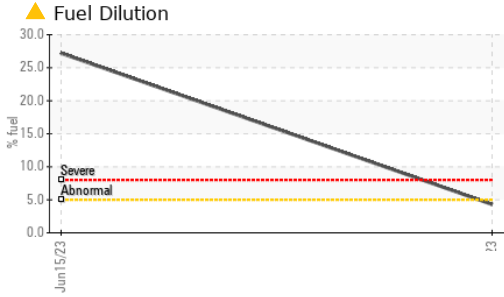

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.0	6.9

GRAPHS

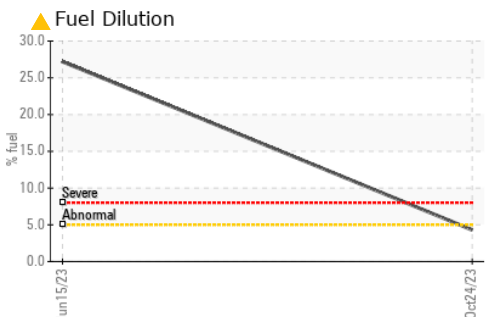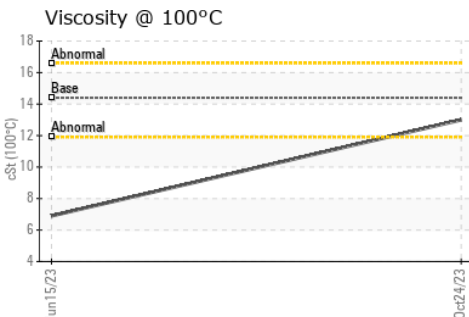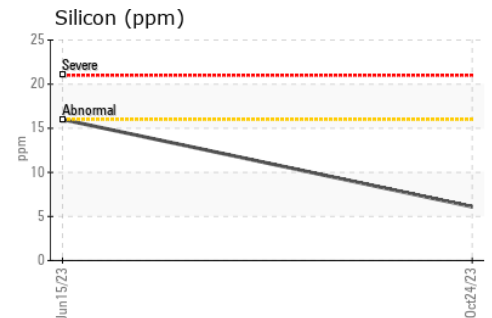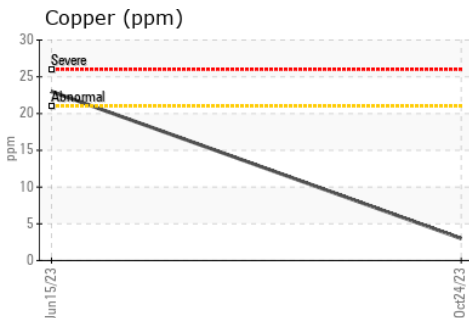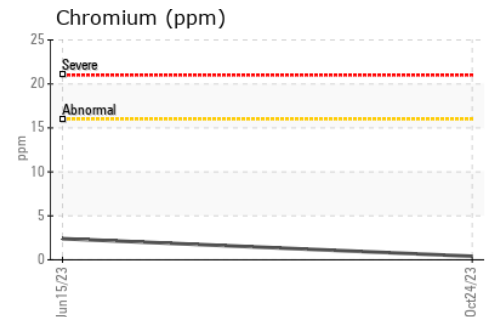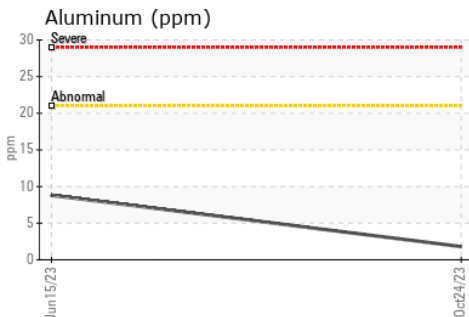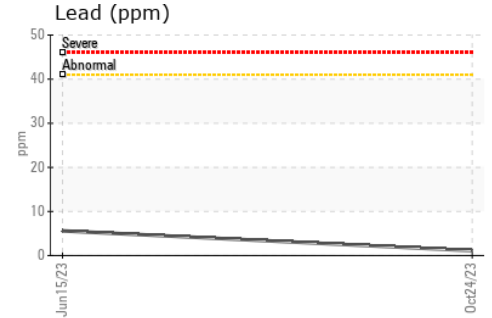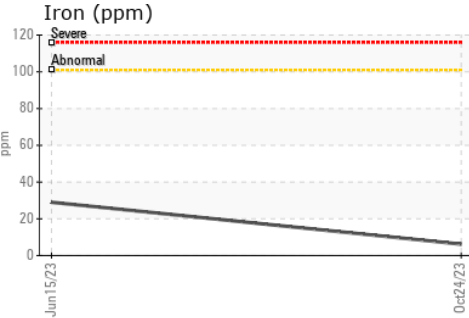

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **DEPARTMENT OF NATIONAL DEFENSE**
Sample No. : WC0848501 **Received** : 27 Oct 2023 **MGEN.GEORGE R.PEARKE'S BUILDING**
Lab Number : 02592340 **Diagnosed** : 30 Oct 2023 **OTTAWA, ON**
Unique Number : 5669419 **Diagnostician** : Kevin Marson **CA K1A 0K2**
Test Package : MOB 1 (Additional Tests: PercentFuel) **Contact: Jacques Brousseau**

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

jacques.brousseau2@forces.gc.ca
 T:
 F: (819)997-9989