



# FUEL REPORT

Sample Rating Trend

ISO



Area  
**[66933]**  
 Machine Id  
**NO UNIT KT0000820**  
 Component  
**Diesel Fuel**  
 Fluid  
**No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)**



## DIAGNOSIS

### Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. We advise that you filter this fluid before use. We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Corrosion

{not applicable}

### Contaminants

There is a light amount of silt (particulates < 14 microns in size) present in the fuel. The water content is negligible.

### Fuel Condition

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel (US EPA/CGSB-3.517-3 type B).

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KT0000820</b>	---	---
Sample Date	Client Info	<b>24 Oct 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## PHYSICAL PROPERTIES

method	limit/base	current	history1	history2	
Specific Gravity	ASTM D1298*	0.839	<b>0.835</b>	---	---
Fuel Color	text Visual Screen*	Yllow	<b>Yllow</b>	---	---
Visc @ 40°C	cSt ASTM D7279(m)	3.0	<b>2.3</b>	---	---
Pensky-Martens Flash Point	°C ASTM D7215*	52	<b>53.9</b>	---	---

## SULFUR CONTENT

method	limit/base	current	history1	history2	
Sulfur	ppm ASTM D5185(m)	10	<b>11</b>	---	---

## DISTILLATION

method	limit/base	current	history1	history2	
Initial Boiling Point	°C ASTM D2887*	165	<b>162</b>	---	---
5% Distillation Point	°C ASTM D2887*		<b>182</b>	---	---
10% Distill Point	°C ASTM D2887*	201	<b>193</b>	---	---
15% Distillation Point	°C ASTM D2887*		<b>201</b>	---	---
20% Distill Point	°C ASTM D2887*	216	<b>210</b>	---	---
30% Distill Point	°C ASTM D2887*	230	<b>226</b>	---	---
40% Distill Point	°C ASTM D2887*	243	<b>241</b>	---	---
50% Distill Point	°C ASTM D2887*	255	<b>256</b>	---	---
60% Distill Point	°C ASTM D2887*	267	<b>271</b>	---	---
70% Distill Point	°C ASTM D2887*	280	<b>287</b>	---	---
80% Distill Point	°C ASTM D2887*	295	<b>303</b>	---	---
85% Distillation Point	°C ASTM D2887*		<b>315</b>	---	---
90% Distill Point	°C ASTM D2887*	310	<b>326</b>	---	---
95% Distillation Point	°C ASTM D2887*		<b>346</b>	---	---
Final Boiling Point	°C ASTM D2887*	341	<b>368</b>	---	---

## IGNITION QUALITY

method	limit/base	current	history1	history2	
API Gravity	ASTM D1298*	37.7	<b>37</b>	---	---
Cetane Index	ASTM D4737*	<40.0	<b>49</b>	---	---

## CONTAMINANTS






method	limit/base	current	history1	history2	
Silicon	ppm ASTM D5185(m)	<1.0	<b>0</b>	---	---
Sodium	ppm ASTM D5185(m)	<0.1	<b>0</b>	---	---
Potassium	ppm ASTM D5185(m)	<0.1	<b>&lt;1</b>	---	---
Water	% ASTM D6304*	<0.05	<b>0.002</b>	---	---
ppm Water	ppm ASTM D6304*	<500	<b>18.3</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>2500	<b>▲ 3653</b>	---	---
Particles >6µm	ASTM D7647	>640	<b>▲ 759</b>	---	---
Particles >14µm	ASTM D7647	>80	<b>13</b>	---	---
Particles >21µm	ASTM D7647	>20	<b>2</b>	---	---
Particles >38µm	ASTM D7647	>4	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	<b>▲ 19/17/11</b>	---	---






# FUEL REPORT

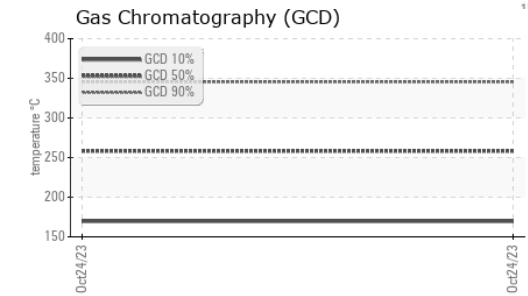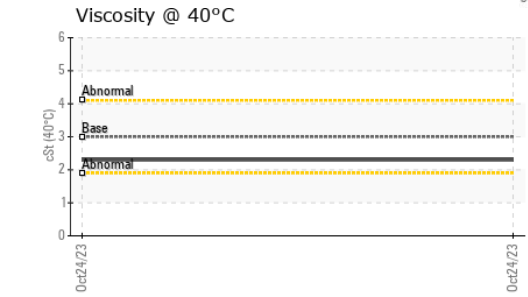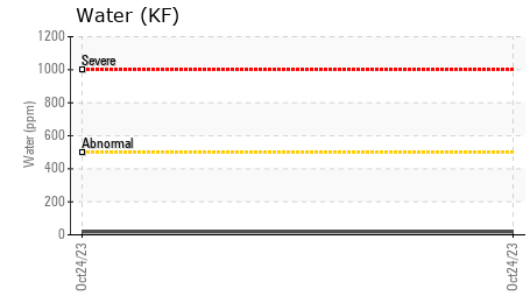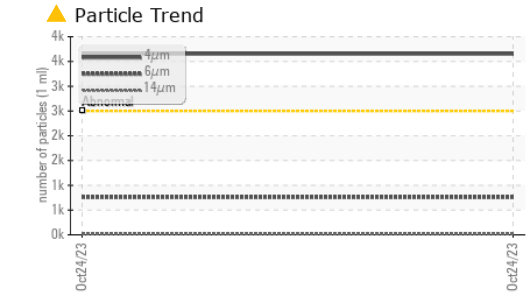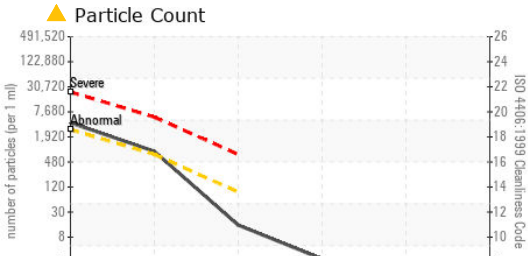

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---
Lead	ppm	ASTM D5185(m)	<0.1	0	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---
Iron	ppm	ASTM D5185(m)	<0.1	<1	---
Calcium	ppm	ASTM D5185(m)	<0.1	0	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	0	---
Zinc	ppm	ASTM D5185(m)	<0.1	0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

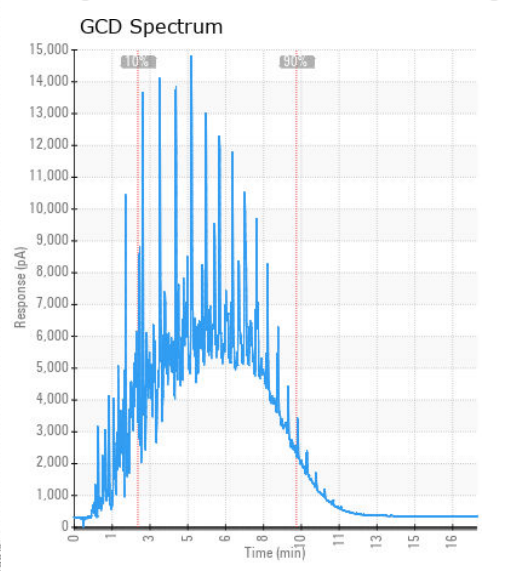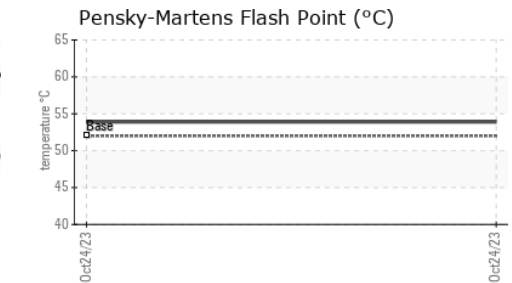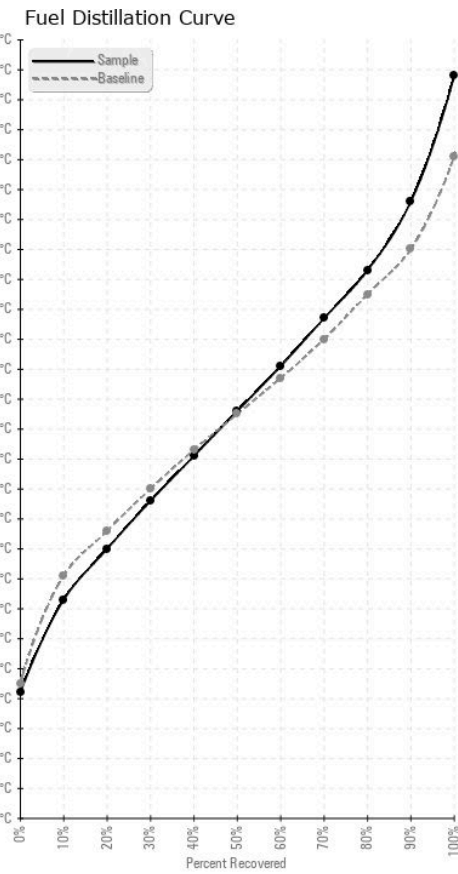

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Kioti Tractor Division - Daedong Canada Inc.  
**Sample No.** : KT0000820 **Received** : 27 Oct 2023  
**Lab Number** : 02592497 **Diagnosed** : 30 Oct 2023  
**Unique Number** : 5669576 **Diagnostician** : Kevin Marson  
**Test Package** : FUEL ( Additional Tests: CC Flash, GC-PercFuel, PrtCount )  
 To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.