




OIL ANALYSIS REPORT

Sample Rating Trend

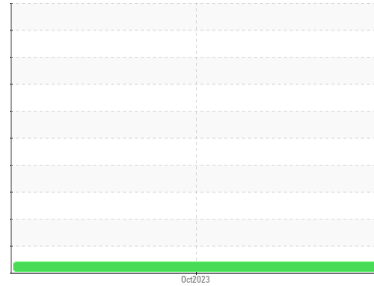

VISCOSITY



Machine Id
HONDA JFNYG1H3XPB500083

Component
Gasoline Engine

Fluid
HONDA 0W20 (--- GAL)

DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 20 range, advise investigate. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0779590	---	---
Sample Date	Client Info		06 Oct 2023	---	---
Machine Age	kms	Client Info	14596	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >150	33	---	---
Chromium	ppm	ASTM D5185(m) >20	<1	---	---
Nickel	ppm	ASTM D5185(m) >5	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >2	0	---	---
Aluminum	ppm	ASTM D5185(m) >40	8	---	---
Lead	ppm	ASTM D5185(m) >50	2	---	---
Copper	ppm	ASTM D5185(m) >155	85	---	---
Tin	ppm	ASTM D5185(m) >10	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	137	---	---
Barium	ppm	ASTM D5185(m)	4	---	---
Molybdenum	ppm	ASTM D5185(m)	591	---	---
Manganese	ppm	ASTM D5185(m)	59	---	---
Magnesium	ppm	ASTM D5185(m)	31	---	---
Calcium	ppm	ASTM D5185(m)	1792	---	---
Phosphorus	ppm	ASTM D5185(m)	614	---	---
Zinc	ppm	ASTM D5185(m)	703	---	---
Sulfur	ppm	ASTM D5185(m)	1707	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	88	---	---
Sodium	ppm	ASTM D5185(m) >400	10	---	---
Potassium	ppm	ASTM D5185(m) >20	4	---	---
Fuel	%	ASTM D7593* >4.0	1.6	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624* >20	11.2	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	27.4	---	---



OIL ANALYSIS REPORT






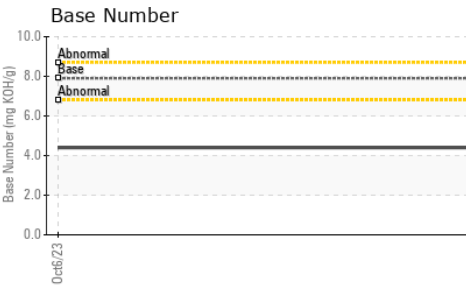
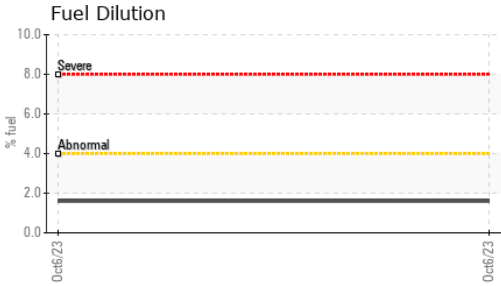
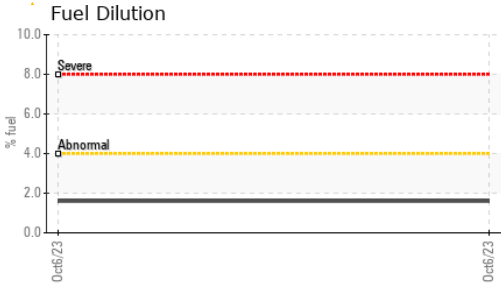


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	22.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	7.90	4.40	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	8.101	▲ 6.8	---	---

GRAPHS

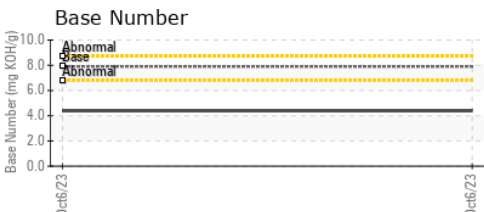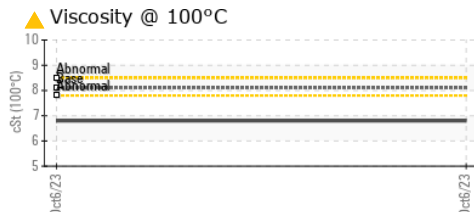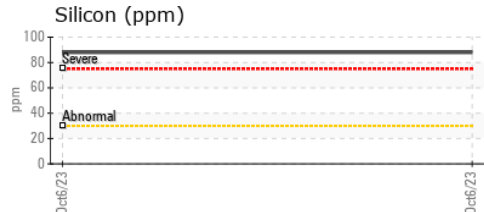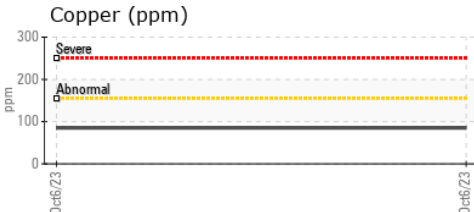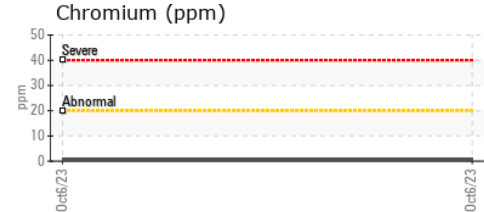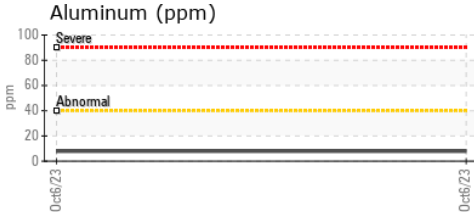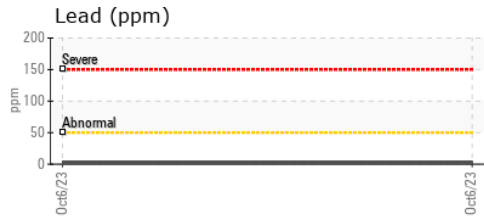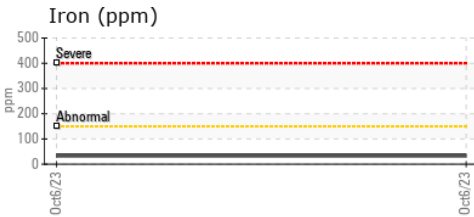

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0779590 **Received** : 30 Oct 2023
Lab Number : 02592657 **Diagnosed** : 31 Oct 2023
Unique Number : 5669736 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

HONDA CANADA INC.
 180 HONDA BLVD
 MARKHAM, ON
 CA L6C 0H9
 Contact: Marc St Arnaud
 marc_starnaud@ch.honda.com
 T:
 F: (416)287-4500

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.