



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**A-BURG LADDER L-1**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO ATF DEXTRONIII /MERCON (--- GAL)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>WC0806366</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>26 Oct 2023</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>162</b>         | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

## WEAR METALS

|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Iron      | ppm    | ASTM D5185(m) >20 | <b>1</b>     | ---      | ---      |
| Chromium  | ppm    | ASTM D5185(m) >10 | <b>0</b>     | ---      | ---      |
| Nickel    | ppm    | ASTM D5185(m) >10 | <b>&lt;1</b> | ---      | ---      |
| Titanium  | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Silver    | ppm    | ASTM D5185(m)     | <b>&lt;1</b> | ---      | ---      |
| Aluminum  | ppm    | ASTM D5185(m) >10 | <b>&lt;1</b> | ---      | ---      |
| Lead      | ppm    | ASTM D5185(m) >10 | <b>1</b>     | ---      | ---      |
| Copper    | ppm    | ASTM D5185(m) >75 | <b>32</b>    | ---      | ---      |
| Tin       | ppm    | ASTM D5185(m) >10 | <b>0</b>     | ---      | ---      |
| Antimony  | ppm    | ASTM D5185(m)     | <b>2</b>     | ---      | ---      |
| Vanadium  | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Beryllium | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Cadmium   | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base    | current      | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) | <b>26</b>    | ---      | ---      |
| Barium     | ppm    | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185(m) | <b>4</b>     | ---      | ---      |
| Calcium    | ppm    | ASTM D5185(m) | <b>15</b>    | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185(m) | <b>183</b>   | ---      | ---      |
| Zinc       | ppm    | ASTM D5185(m) | <b>129</b>   | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185(m) | <b>2376</b>  | ---      | ---      |
| Lithium    | ppm    | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |

## CONTAMINANTS



|           | method | limit/base        | current  | history1 | history2 |
|-----------|--------|-------------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >20 | <b>3</b> | ---      | ---      |
| Sodium    | ppm    | ASTM D5185(m)     | <b>3</b> | ---      | ---      |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>0</b> | ---      | ---      |

## FLUID CLEANLINESS

|                 | method       | limit/base | current         | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm  | ASTM D7647   | >5000      | <b>4843</b>     | ---      | ---      |
| Particles >6µm  | ASTM D7647   | >1300      | <b>1277</b>     | ---      | ---      |
| Particles >14µm | ASTM D7647   | >160       | <b>92</b>       | ---      | ---      |
| Particles >21µm | ASTM D7647   | >40        | <b>18</b>       | ---      | ---      |
| Particles >38µm | ASTM D7647   | >10        | <b>1</b>        | ---      | ---      |
| Particles >71µm | ASTM D7647   | >3         | <b>1</b>        | ---      | ---      |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14  | <b>19/17/14</b> | ---      | ---      |



# OIL ANALYSIS REPORT

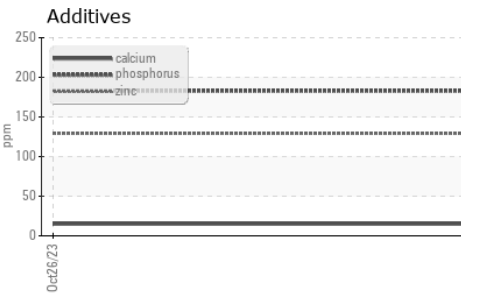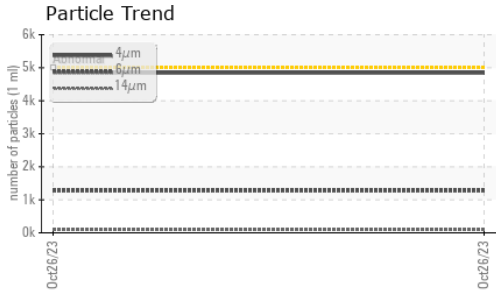





| VISUAL           | method | limit/base | current | history1     | history2 |     |
|------------------|--------|------------|---------|--------------|----------|-----|
| White Metal      | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Yellow Metal     | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Precipitate      | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Silt             | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Debris           | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Sand/Dirt        | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Appearance       | scalar | Visual*    | NORML   | <b>NORML</b> | ---      | --- |
| Odor             | scalar | Visual*    | NORML   | <b>NORML</b> | ---      | --- |
| Emulsified Water | scalar | Visual*    | >0.1    | <b>NEG</b>   | ---      | --- |
| Free Water       | scalar | Visual*    |         | <b>NEG</b>   | ---      | --- |

| FLUID PROPERTIES | method | limit/base    | current | history1    | history2 |     |
|------------------|--------|---------------|---------|-------------|----------|-----|
| Visc @ 40°C      | cSt    | ASTM D7279(m) | 37      | <b>29.4</b> | ---      | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |  |  |  |          |          |
|--------|--|--|--|----------|----------|
| Color  |  |  |  | no image | no image |
| Bottom |  |  |  | no image | no image |

## GRAPHS

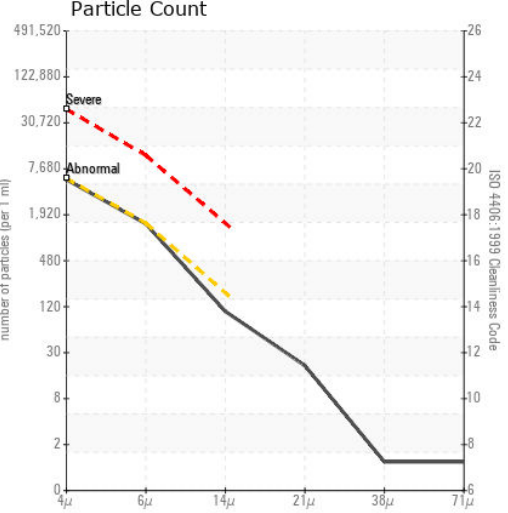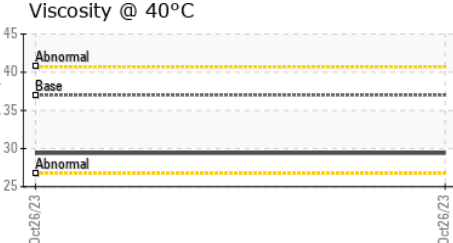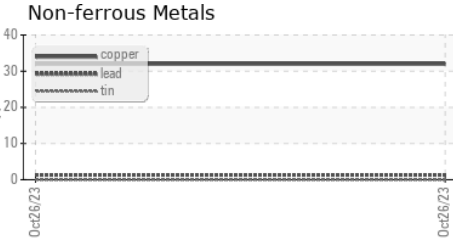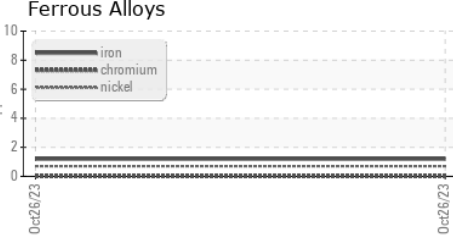

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0806366 **Received** : 30 Oct 2023  
**Lab Number** : **02592692** **Diagnosed** : 31 Oct 2023  
**Unique Number** : 5669771 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 2

**City of Windsor**  
 2885 Kew Drive  
 Windsor, ON  
 CA N8T 3B7  
 Contact: Susanne Hutnik  
 shutnik@city.windsor.on.ca  
 T: (519)253-3016  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.