




# OIL ANALYSIS REPORT

Sample Rating Trend

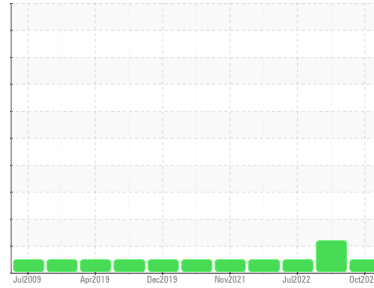

**NORMAL**



Area  
**System 31 - Crude Separator System**  
 Machine Id  
**N-3104A TRANSFORMER, COALESCER STEP UP 600V 3 PH**  
 Component  
**Transformer Oil**  
 Fluid  
**IRVING TRANSFORMER OIL (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Insufficient sample was received to conduct all the routine laboratory tests (Interfacial Tension).

### Wear

{not applicable}

### Contamination

The water content is negligible. There is no indication of any contamination in the transformer oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the transformer oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PP</b>	PP	PP
Sample Date	Client Info	<b>29 Oct 2023</b>	16 Apr 2023	28 Jul 2022
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >125	<b>0</b>	<1	0
Chromium	ppm ASTM D5185(m)	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m)	<b>0</b>	<1	0
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m) >2	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185(m) >5	<b>0</b>	<1	<1
Lead	ppm ASTM D5185(m) >30	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185(m) >10	<b>&lt;1</b>	0	0
Tin	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>&lt;1</b>	0	0
Barium	ppm ASTM D5185(m)	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m)	<b>0</b>	0	0
Calcium	ppm ASTM D5185(m)	<b>0</b>	0	0
Phosphorus	ppm ASTM D5185(m)	<b>0</b>	0	<1
Zinc	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Sulfur	ppm ASTM D5185(m)	<b>853</b>	896	881
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	<b>0</b>	0	0
Sodium	ppm ASTM D5185(m)	<b>&lt;1</b>	0	0
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	<1	<1
Water	% ASTM D6304* >0.0035	<b>0.003</b>	0.001	0.001
ppm Water	ppm ASTM D6304* >35	<b>29.5</b>	5.1	0.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	<b>0.02</b>	▲ 0.06	0.02



# OIL ANALYSIS REPORT

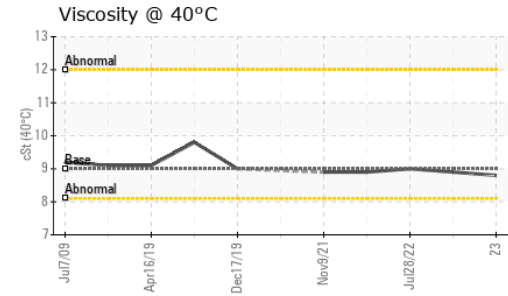
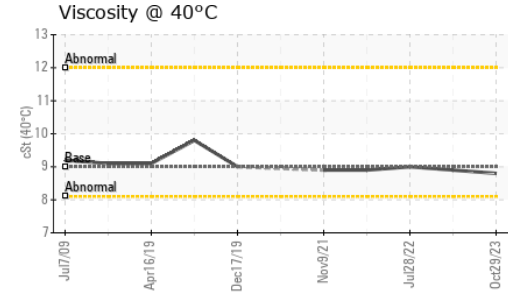
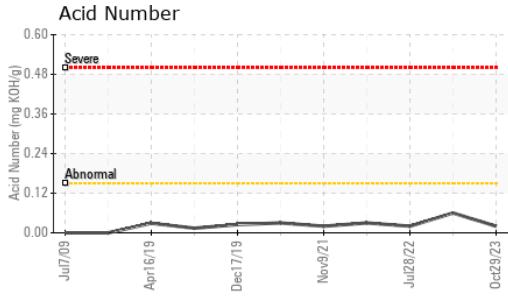


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML

FLUID PROPERTIES	method	limit/base	current	history1	history2
Specific Gravity	ASTM D4052(e)	0.865	<b>0.875</b>	0.874	0.874
Visc @ 40°C	cSt ASTM D7279(m)	9	<b>8.8</b>	8.9	9
Interfacial Tension	mN/m ASTM D971(e)*		--	27.78	27.91
ASTM Color	scalar ASTM D1500(e)		<b>L1.5</b>	<1.5	<1.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

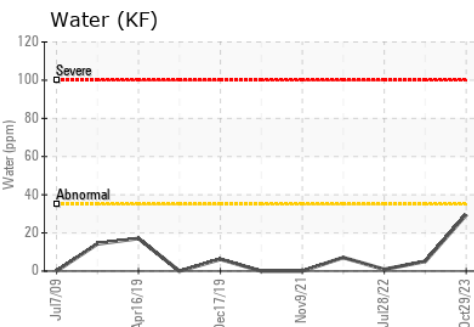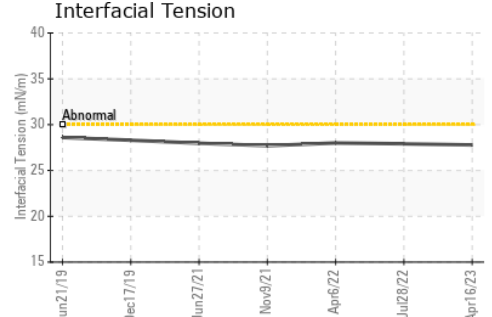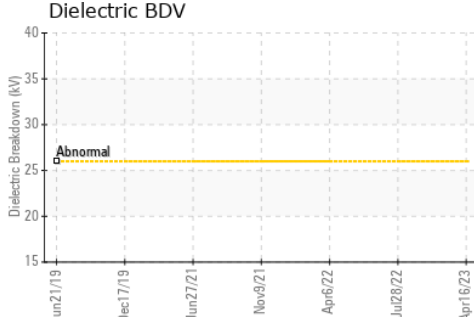

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **HIBERNIA MGMT & DEVELOPMENT CO. LTD**  
**Sample No.** : PP **Received** : 30 Oct 2023 **SUITE 1000,, 100 NEW GOWER STREET**  
**Lab Number** : **02592791** **Diagnosed** : 18 Dec 2023 **ST.JOHNS, NL**  
**Unique Number** : 5669870 **Diagnostician** : Bill Quesnel **CA A1C 6K3**  
**Test Package** : TRF 1 ( Additional Tests: ICP, KV40 )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Christopher Michelau  
 christopher.j.michelau@exxonmobil.com  
 T: (709)722-3766