




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

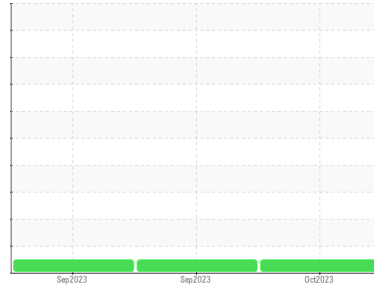

Area  
**BD SHOP**  
 Machine Id  
**300180**

Component  
**Diesel Engine**  
 Fluid

**PETRO CANADA DURON SHP 10W30 (40 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0864679</b>   | WC0864664   | WC0864663   |
| Sample Date   | Client Info |             | <b>29 Oct 2023</b> | 25 Sep 2023 | 25 Sep 2023 |
| Machine Age   | kms         | Client Info | <b>206940</b>      | 191467      | 191466      |
| Oil Age       | kms         | Client Info | <b>15474</b>       | 1           | 64829       |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Not Chngd   | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|           | method | limit/base         | current      | history1 | history2 |
|-----------|--------|--------------------|--------------|----------|----------|
| Iron      | ppm    | ASTM D5185(m) >100 | <b>15</b>    | 53       | 4        |
| Chromium  | ppm    | ASTM D5185(m) >20  | <b>&lt;1</b> | 3        | 0        |
| Nickel    | ppm    | ASTM D5185(m) >4   | <b>0</b>     | <1       | 0        |
| Titanium  | ppm    | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |
| Silver    | ppm    | ASTM D5185(m) >3   | <b>&lt;1</b> | <1       | <1       |
| Aluminum  | ppm    | ASTM D5185(m) >20  | <b>8</b>     | 30       | 2        |
| Lead      | ppm    | ASTM D5185(m) >40  | <b>&lt;1</b> | 1        | <1       |
| Copper    | ppm    | ASTM D5185(m) >330 | <b>5</b>     | 30       | 2        |
| Tin       | ppm    | ASTM D5185(m) >15  | <b>0</b>     | <1       | 0        |
| Antimony  | ppm    | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |
| Vanadium  | ppm    | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |
| Beryllium | ppm    | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |
| Cadmium   | ppm    | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base         | current      | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) 2    | <b>3</b>     | 2        | 3        |
| Barium     | ppm    | ASTM D5185(m) 0    | <b>&lt;1</b> | <1       | <1       |
| Molybdenum | ppm    | ASTM D5185(m) 50   | <b>67</b>    | 64       | 57       |
| Manganese  | ppm    | ASTM D5185(m) 0    | <b>0</b>     | 1        | 0        |
| Magnesium  | ppm    | ASTM D5185(m) 950  | <b>1099</b>  | 1007     | 954      |
| Calcium    | ppm    | ASTM D5185(m) 1050 | <b>1230</b>  | 1129     | 1049     |
| Phosphorus | ppm    | ASTM D5185(m) 995  | <b>1116</b>  | 936      | 1000     |
| Zinc       | ppm    | ASTM D5185(m) 1180 | <b>1350</b>  | 1211     | 1173     |
| Sulfur     | ppm    | ASTM D5185(m) 2600 | <b>2884</b>  | 2038     | 2569     |
| Lithium    | ppm    | ASTM D5185(m)      | <b>&lt;1</b> | <1       | <1       |

## CONTAMINANTS



|           | method | limit/base        | current  | history1 | history2 |
|-----------|--------|-------------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >25 | <b>6</b> | 9        | 5        |
| Sodium    | ppm    | ASTM D5185(m)     | <b>2</b> | 3        | 1        |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>9</b> | 30       | <1       |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | ASTM D7844* >3  | <b>0.2</b>  | 0.9      | 0.1      |
| Nitration | Abs/cm   | ASTM D7624* >20 | <b>6.2</b>  | 9.4      | 5.3      |
| Sulfation | Abs./1mm | ASTM D7415* >30 | <b>18.4</b> | 21.9     | 18.6     |



# OIL ANALYSIS REPORT







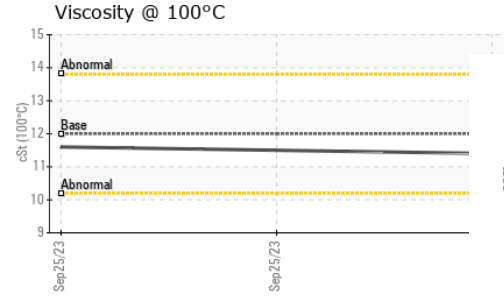
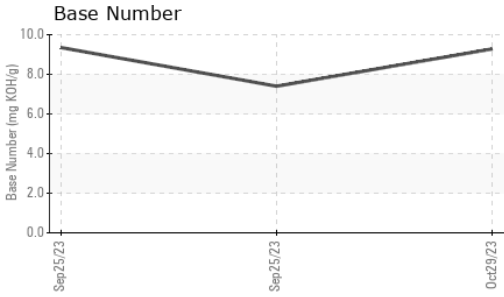


| FLUID DEGRADATION | method   | limit/base  | current | history1    | history2 |      |
|-------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation         | Abs/.1mm | ASTM D7414* | >25     | <b>13.9</b> | 17.1     | 13.6 |
| Base Number (BN)  | mg KOH/g | ASTM D2896* |         | <b>9.28</b> | 7.40     | 9.35 |

| VISUAL           | method | limit/base | current | history1   | history2 |     |
|------------------|--------|------------|---------|------------|----------|-----|
| Emulsified Water | scalar | Visual*    | >0.2    | <b>NEG</b> | NEG      | NEG |
| Free Water       | scalar | Visual*    |         | <b>NEG</b> | NEG      | NEG |

| FLUID PROPERTIES | method | limit/base    | current | history1    | history2 |      |
|------------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D7279(m) | 12.00   | <b>11.4</b> | 11.5     | 11.6 |

## GRAPHS

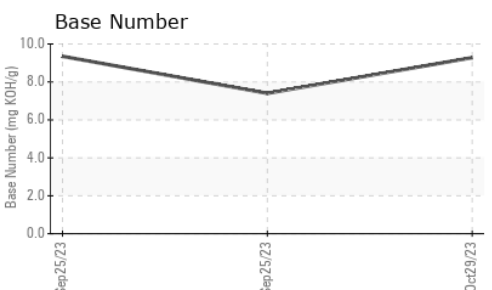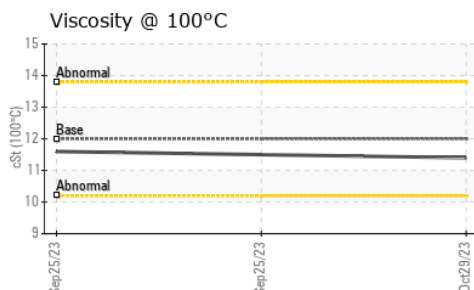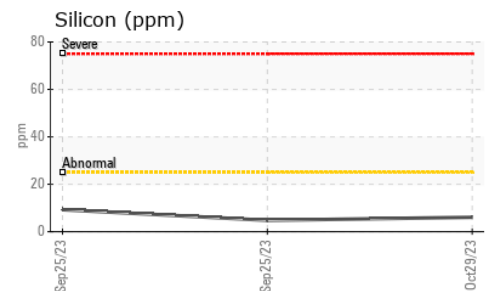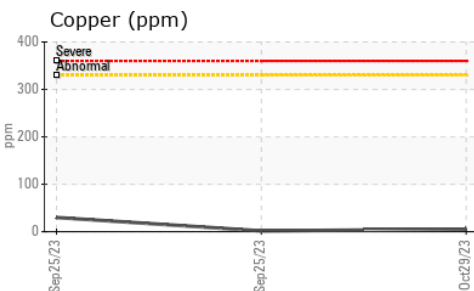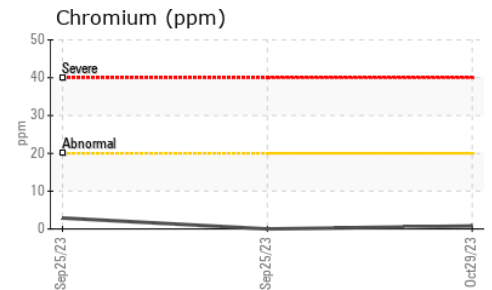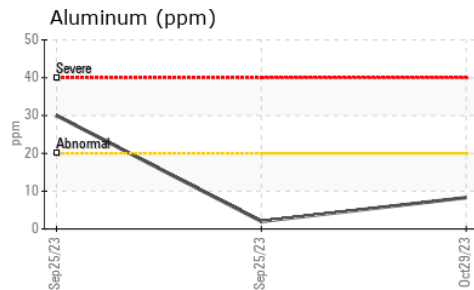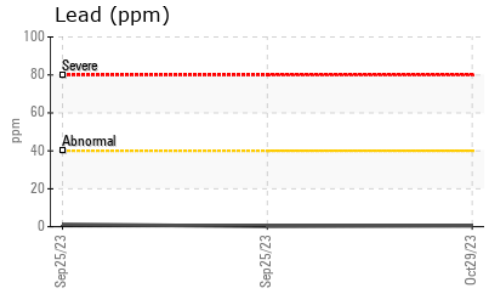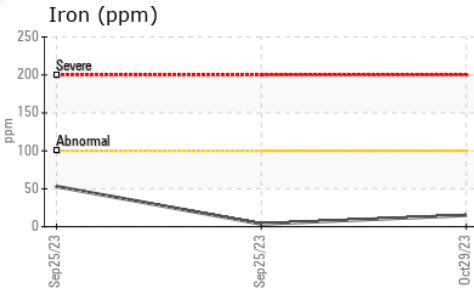

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0864679      **Received** : 31 Oct 2023  
**Lab Number** : **02592897**      **Diagnosed** : 01 Nov 2023  
**Unique Number** : 5669976      **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**WFR Technical Services**  
 5389 Riverside Drive  
 Burlington, ON  
 CA L7L 3Y1  
 Contact: William Ridley  
 wfr.technical.services@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.