




OIL ANALYSIS REPORT

Sample Rating Trend

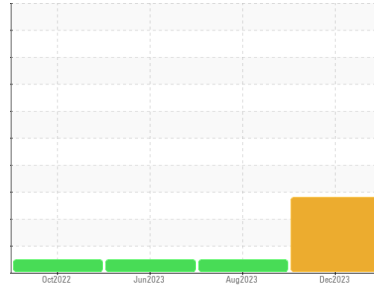

Area
[42414427]
 Machine Id
7483
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is a moderate concentration of dirt present in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0853298 | WC0853319 | WC0796317 |
| Sample Date | Client Info | | 02 Dec 2023 | 26 Aug 2023 | 03 Jun 2023 |
| Machine Age | kms | Client Info | 164547 | 125416 | 100866 |
| Oil Age | kms | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | Changed | Not Changd | Changed |
| Sample Status | | | ABNORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | 0.6 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >130 | 67 | 16 | 44 |
| Chromium | ppm | ASTM D5185(m) | >10 | 2 | <1 | 3 |
| Nickel | ppm | ASTM D5185(m) | >4 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | <1 | <1 |
| Silver | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 10 | 9 | 11 |
| Lead | ppm | ASTM D5185(m) | >20 | 1 | <1 | 2 |
| Copper | ppm | ASTM D5185(m) | >125 | 29 | 12 | 43 |
| Tin | ppm | ASTM D5185(m) | >4 | <1 | 0 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 250 | 24 | 40 | 21 |
| Barium | ppm | ASTM D5185(m) | 10 | 3 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185(m) | 100 | 47 | 2 | 10 |
| Manganese | ppm | ASTM D5185(m) | | 7 | <1 | 1 |
| Magnesium | ppm | ASTM D5185(m) | 450 | 761 | 739 | 738 |
| Calcium | ppm | ASTM D5185(m) | 3000 | 1159 | 1341 | 1427 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 629 | 735 | 779 |
| Zinc | ppm | ASTM D5185(m) | 1350 | 802 | 787 | 842 |
| Sulfur | ppm | ASTM D5185(m) | 4250 | 1846 | 2523 | 2435 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|-------------|----------|----|
| Silicon | ppm | ASTM D5185(m) | >25 | ▲ 26 | 6 | 10 |
| Sodium | ppm | ASTM D5185(m) | | 8 | 3 | 4 |
| Potassium | ppm | ASTM D5185(m) | >20 | 27 | 27 | 28 |


INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|---------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >6 | 0.1 | 1.4 | 3.1 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 11.7 | 9.7 | 12.0 |
| Sulfation | Abs.1mm | ASTM D7415* | >30 | 23.6 | 22.1 | 27.6 |



OIL ANALYSIS REPORT

▲ Silicon (ppm)

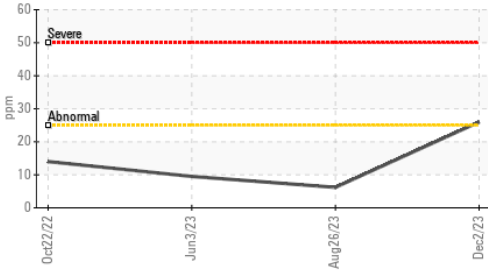

FLUID DEGRADATION method limit/base current history1 history2

Oxidation Abs./1mm ASTM D7414* >25 ▲ **25.4** 13.3 17.0

VISUAL method limit/base current history1 history2

Emulsified Water scalar Visual* >0.2 **NEG** NEG NEG


Free Water scalar Visual* **NEG** NEG NEG

FLUID PROPERTIES method limit/base current history1 history2


Visc @ 100°C cSt ASTM D7279(m) 10.9 **11.4** 11.8 12.1

GRAPHS


Viscosity @ 100°C

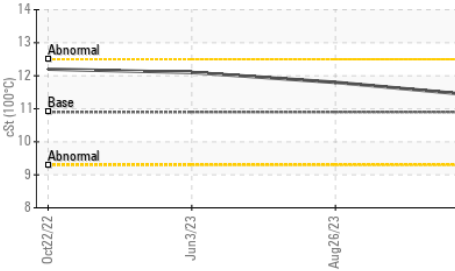


Iron (ppm)

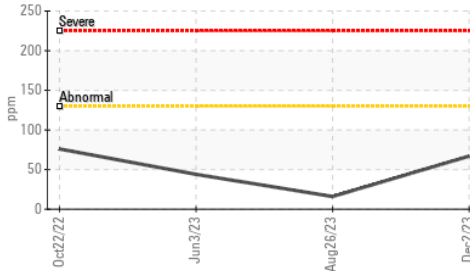


Lead (ppm)

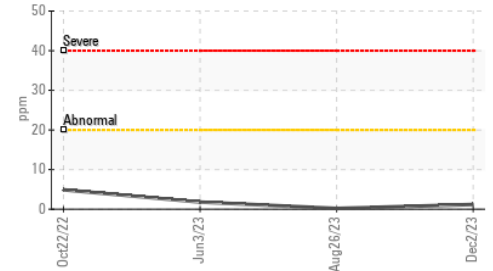


Aluminum (ppm)

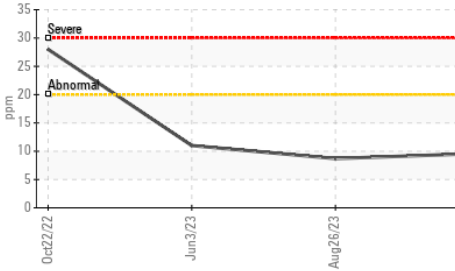


Aluminum (ppm)

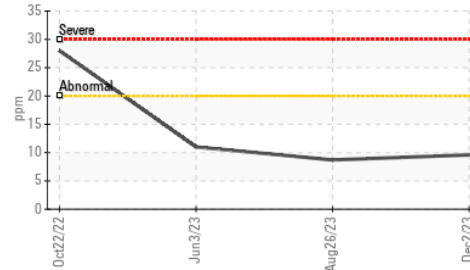


Chromium (ppm)

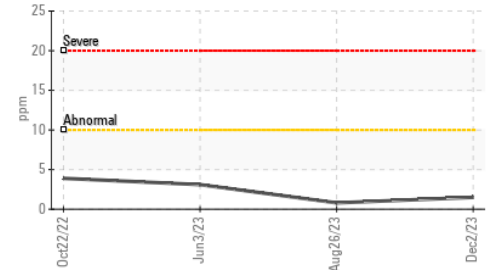


Copper (ppm)

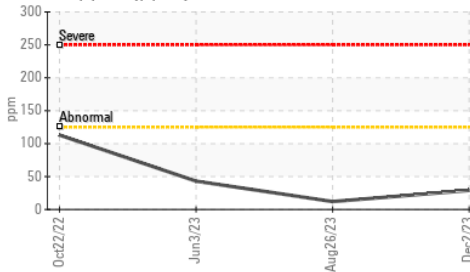


▲ Silicon (ppm)

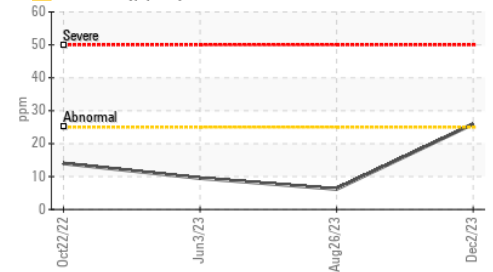

Viscosity @ 100°C

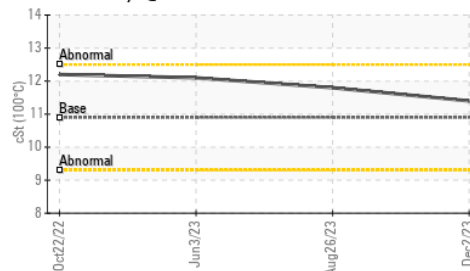

Soot %

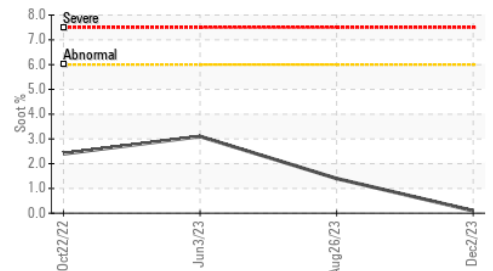

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0853298 **Received** : 05 Dec 2023
Lab Number : 02600866 **Diagnosed** : 06 Dec 2023
Unique Number : 5693951 **Diagnostician** : Kevin Marson
Test Package : MOB 1

Rush Truck Centres

7450 Torbram Rd.
Mississauga, ON
CA L4T 1G9
Contact: Serdar Okur
sokur@rushtruckcentres.ca
T: (905)671-7600
F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.