




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

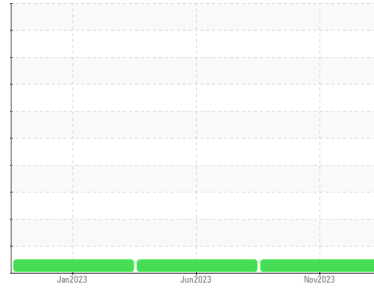

Machine Id

**487**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Il n'y a aucun indice de contamination dans l'huile.

### Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0874980</b>	WC0833136	WC0658491
Sample Date	Client Info		<b>10 Nov 2023</b>	21 Jun 2023	19 Jan 2023
Machine Age	kms	Client Info	<b>547741</b>	547741	534202
Oil Age	kms	Client Info	<b>0</b>	13539	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	<b>14</b>	24	18
Chromium	ppm	ASTM D5185(m)	>6	<b>1</b>	2	<1
Nickel	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	<b>7</b>	12	6
Lead	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>50	<b>7</b>	29	33
Tin	ppm	ASTM D5185(m)	>6	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	<b>32</b>	33	3
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>57</b>	51	55
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>1048</b>	935	873
Calcium	ppm	ASTM D5185(m)	1050	<b>859</b>	1077	1228
Phosphorus	ppm	ASTM D5185(m)	995	<b>967</b>	1065	1095
Zinc	ppm	ASTM D5185(m)	1180	<b>1177</b>	1176	1181
Sulfur	ppm	ASTM D5185(m)	2600	<b>2708</b>	2700	2714
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>50	<b>4</b>	4	4
Sodium	ppm	ASTM D5185(m)		<b>4</b>	4	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	3

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.3</b>	7.9	7.2
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>20.1</b>	20.1	18.9



# OIL ANALYSIS REPORT







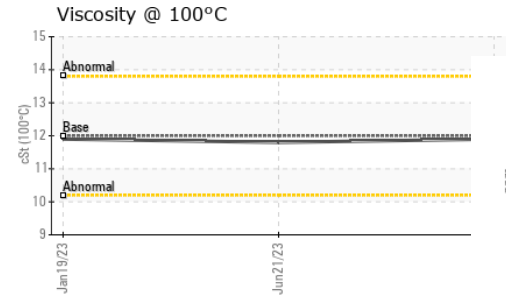
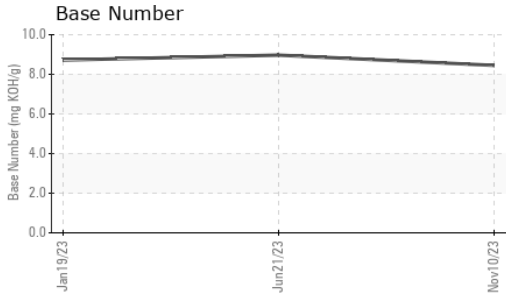


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	17.5	15.6	14.2
Base Number (BN)	mg KOH/g	ASTM D2896*		8.45	8.97	8.72

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.9	11.8	11.9

## GRAPHS

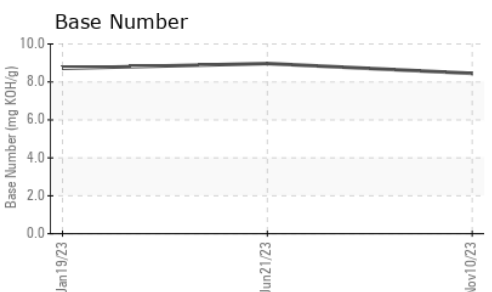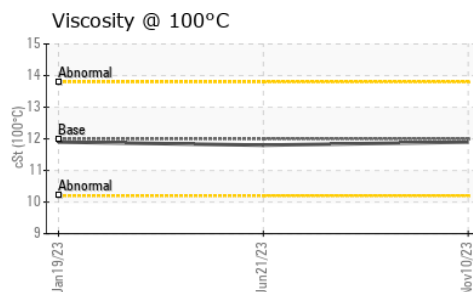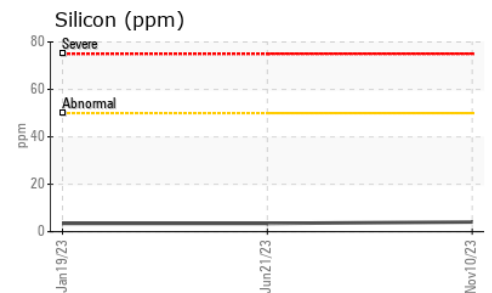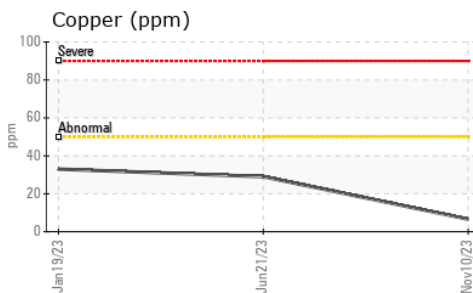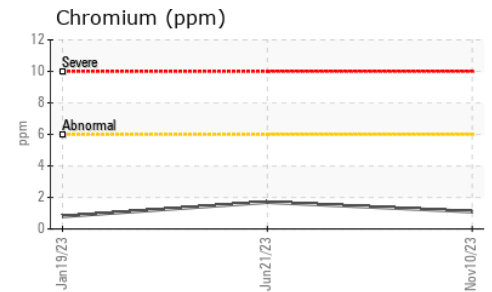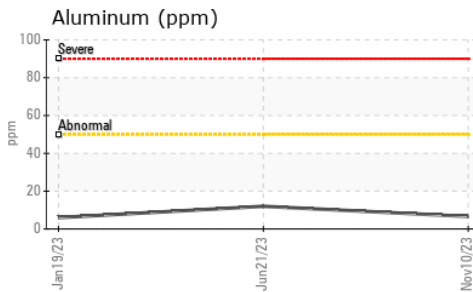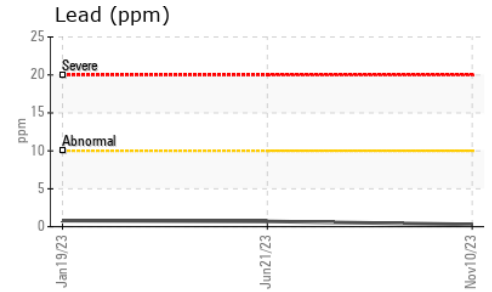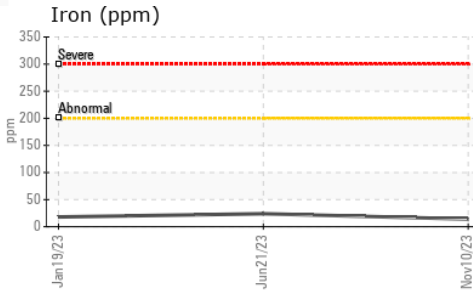

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0874980      **Received** : 05 Dec 2023  
**Lab Number** : 02600889      **Diagnosed** : 05 Dec 2023  
**Unique Number** : 5693974      **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**Levis - Transport Laberge**  
 3200 rue de l'etchemin  
 Levis, QC  
 CA G6W 7X6  
 Contact: Stephane Godbout  
 avisieur@transportlaberge.com  
 T: (450)347-4336  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.