




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

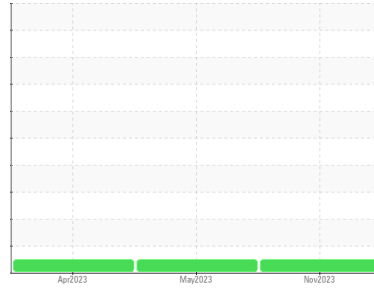

Area
(C-FHCW)
Machine Id
[C-FHCW] 9004-18453
Component
Hydraulic System
Fluid
MIL-PRF-5606H (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target SAE AS4059 (replaces NAS 1638) cleanliness code. There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PP	WC0752621	WC0752619
Sample Date	Client Info			29 Nov 2023	14 May 2023	06 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		<1	---	---
Aluminum	ppm	ASTM D5185(m)	>10	<1	---	---
Lead	ppm	ASTM D5185(m)	>20	<1	---	---
Copper	ppm	ASTM D5185(m)	>20	1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	---	---
Barium	ppm	ASTM D5185(m)		1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		0	---	---
Calcium	ppm	ASTM D5185(m)		<1	---	---
Phosphorus	ppm	ASTM D5185(m)		576	---	---
Zinc	ppm	ASTM D5185(m)		4	---	---
Sulfur	ppm	ASTM D5185(m)		117	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2	---	---
Sodium	ppm	ASTM D5185(m)		<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>128000	3622	2209	20347
Particles 15-25µm	count	NAS 1638	>22800	630	249	1140
Particles 25-50µm	count	NAS 1638	>4050	220	140	234
Particles 50-100µm	count	NAS 1638	>720	24	15	47
Particles >100µm	count	NAS 1638	>128	2	0	13
NAS 1638	Class	NAS 1638	>9	5	5	7



OIL ANALYSIS REPORT

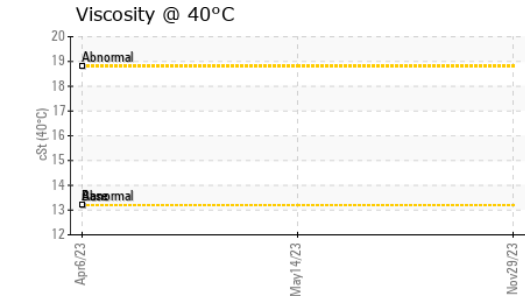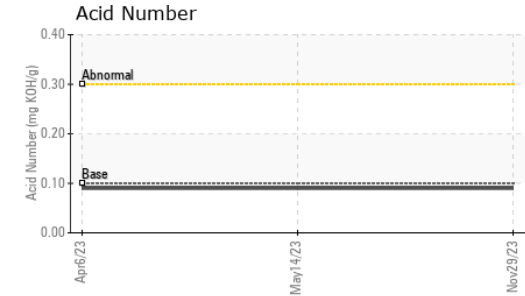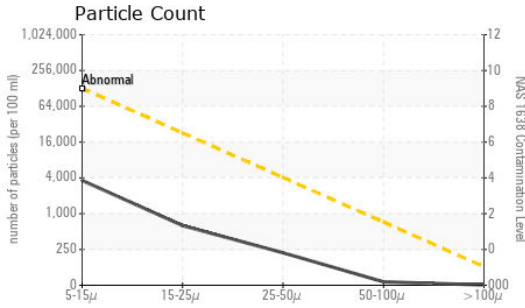


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.1	0.09	0.09
VISUAL					
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---



FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	13.2	13.1	---

SAMPLE IMAGES

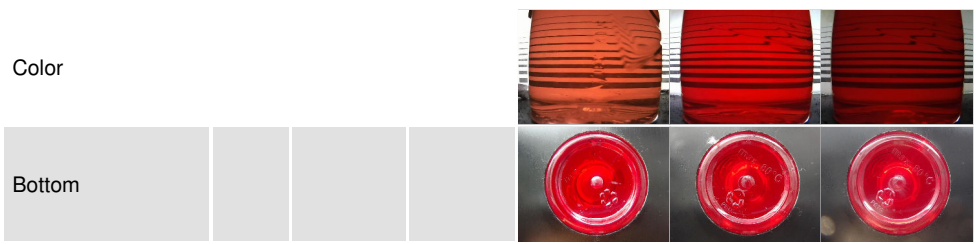

GRAPHS

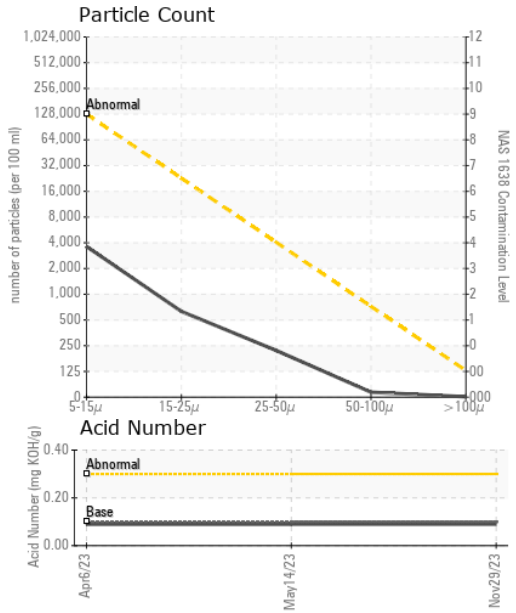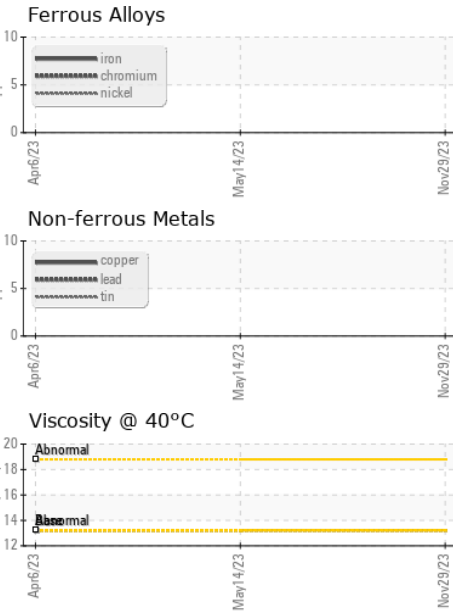

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP **Received** : 05 Dec 2023
Lab Number : 02600970 **Diagnosed** : 08 Dec 2023
Unique Number : 5694055 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: PrtCountNAS, TAN Man)

SKYSERVICE F.B.O. INC.
 10105 RYAN AVENUE
 DORVAL, QC
 CA H9P 1A2
 Contact: Maintenance YUL
 maintenance_yul@skyservice.com
 T:
 F: (514)636-3625

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.