




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

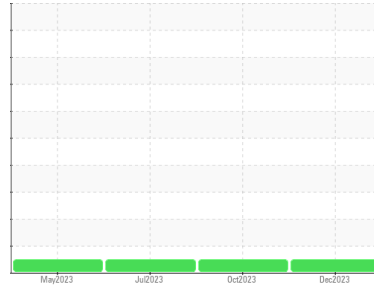

Machine Id
KUBOTA RTV X1140 MCP752 (S/N 100015583)

Component
Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | WC0865560 | WC0848126 | WC0826317 |
| Sample Date | Client Info | | | 03 Dec 2023 | 15 Oct 2023 | 19 Jul 2023 |
| Machine Age | hrs | Client Info | | 1377 | 1227 | 883 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | Changed | N/A | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >100 | 26 | 60 | 17 |
| Chromium | ppm | ASTM D5185(m) | >20 | <1 | 1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >4 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >3 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 3 | 7 | 3 |
| Lead | ppm | ASTM D5185(m) | >40 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) | >330 | 1 | 3 | 2 |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 0 | 48 | 38 | 48 |
| Barium | ppm | ASTM D5185(m) | 0 | <1 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 60 | 42 | 46 | 49 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | 1010 | 524 | 555 | 585 |
| Calcium | ppm | ASTM D5185(m) | 1070 | 1683 | 1844 | 1594 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 722 | 770 | 819 |
| Zinc | ppm | ASTM D5185(m) | 1270 | 893 | 957 | 916 |
| Sulfur | ppm | ASTM D5185(m) | 2060 | 2031 | 2036 | 2118 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >25 | 8 | 12 | 8 |
| Sodium | ppm | ASTM D5185(m) | | 4 | 5 | 3 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | <1 | <1 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* | >3 | 0.2 | 0.6 | 0.1 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 7.5 | 10.6 | 7.2 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 22.3 | 25.2 | 22.9 |



OIL ANALYSIS REPORT

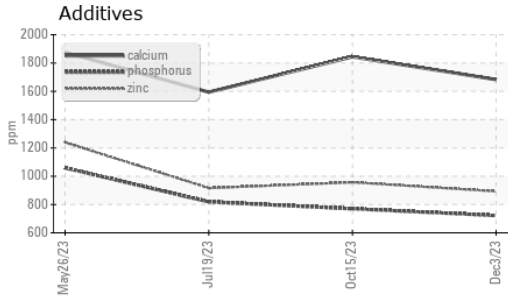

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|----------|-------------|---------|----------|----------|
| Abs./1mm | ASTM D7414* | >25 | 24.7 | 20.3 |


VISUAL

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| scalar | Visual* | >0.2 | NEG | NEG |
| scalar | Visual* | NEG | NEG | NEG |


FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|--------|---------------|---------|----------|----------|
| cSt | ASTM D7279(m) | 15.6 | 14.2 | 13.4 |


GRAPHS

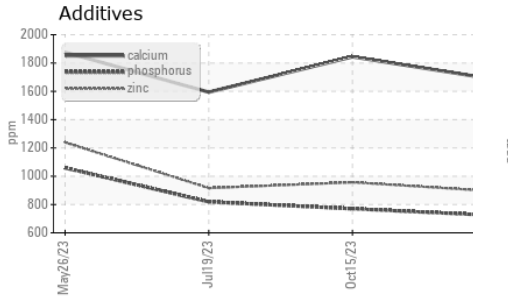


Iron (ppm)

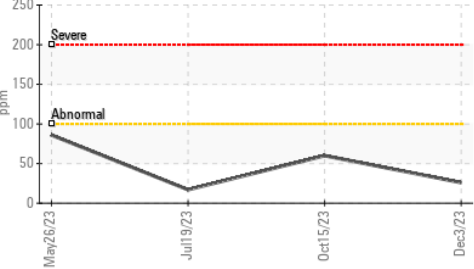


Lead (ppm)

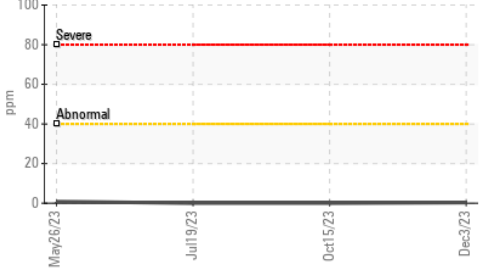


Aluminum (ppm)

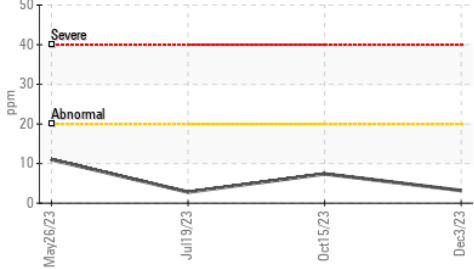


Chromium (ppm)

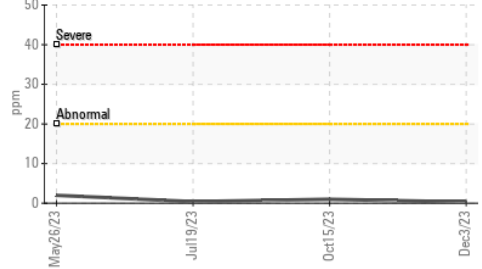


Copper (ppm)

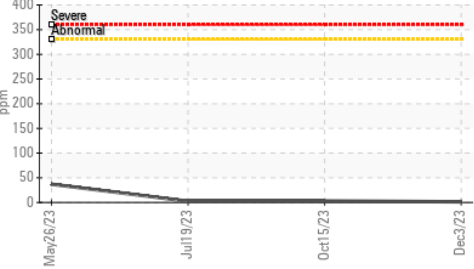


Silicon (ppm)

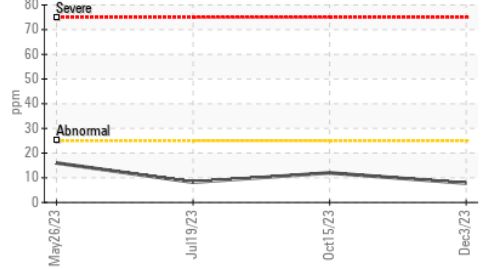

Viscosity @ 100°C

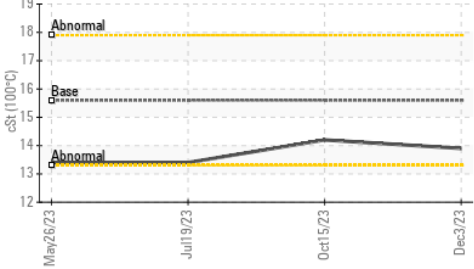

Soot %

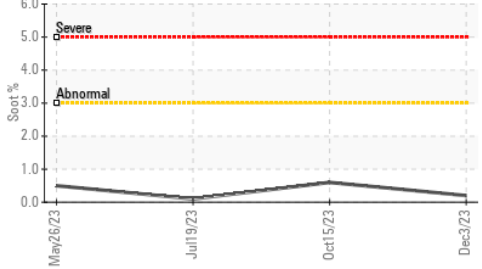

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0865560
Lab Number : 02601177
Unique Number : 5694262
Test Package : MOB 1

Received : 06 Dec 2023
Diagnosed : 07 Dec 2023
Diagnostician : Bill Quesnel

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Tony Tees
 tony.tees@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.