

OIL ANALYSIS REPORT

NORMAL

GAC SMALL 5606 ACTUATOR RIG

Hydraulic System

ROYAL ROYCO 756 (--- GAL)

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear


All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0884136	WC0761511	
Sample Date		Client Info		06 Dec 2023	14 Nov 2022	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	0	
Chromium	ppm	ASTM D5185(m)	>20	0	0	
Nickel	ppm	ASTM D5185(m)	>20	<1	0	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		<1	0	
Aluminum	ppm	ASTM D5185(m)	>20	0	<1	
Lead	ppm	ASTM D5185(m)	>20	<1	<1	
Copper	ppm	ASTM D5185(m)	>20	<1	0	
Tin	ppm	ASTM D5185(m)	>20	0	<1	
Antimony	ppm	ASTM D5185(m)		0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185(m)	limit/base	current	history1 <1	history2
	ppm					history2
Boron		ASTM D5185(m)		<1	<1	
Boron Barium	ppm	ASTM D5185(m) ASTM D5185(m)		<1 0	<1 0	
Boron Barium Molybdenum	ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		<1 0 0	<1 0 0	
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		<1 0 0 0	<1 0 0 0	
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		<1 0 0 0 0	<1 0 0 0 0 <1	
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185(m)	1	<1 0 0 0 0 0	<1 0 0 0 0 <1 0	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185(m)	1	<1 0 0 0 0 0 0 411	<1 0 0 0 0 <1 0 441	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	400	<1 0 0 0 0 0 0 411 <1	<1 0 0 0 0 <1 0 441	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	400	<1 0 0 0 0 0 0 411 <1 111	<1 0 0 0 0 <1 0 441 <1 110	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	400	<1 0 0 0 0 0 0 411 <1 111	<1 0 0 0 <1 0 441 <1 110 <1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	1 400 0 limit/base	<1 0 0 0 0 0 0 411 <1 111 <1	<1 0 0 0 <1 0 441 <1 110 <1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m)	1 400 0 limit/base	<1 0 0 0 0 0 0 411 <1 111 <1 current	<1 0 0 0 <1 0 441 <1 110 <1 history1	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	1 400 0 limit/base >15	<1 0 0 0 0 0 0 411 <1 111 <1 current <1	<1 0 0 0 <1 0 441 <1 110 <1 history1 <1 0	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	1 400 0 limit/base >15 >20	<1 0 0 0 0 0 411 <1 111 <1 current <1 0	<1 0 0 0 0 <1 0 441 <1 110 <1 history1 <1 0 <1	history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	1 400 0 limit/base >15 >20 limit/base	<1 0 0 0 0 0 411 <1111 <1 current <1 0 current 290	<1 0 0 0 441 <1 110 <1 history1 <1 0 436	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m)	1 400 0 limit/base >15 >20 limit/base >5000	<1 0 0 0 0 0 411 <1111 <1 current <1 0 current 290 106	<1 0 0 0 441 <1 110 <1 history1 <1 history1	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	1 400 0 limit/base >15 >20 limit/base >5000 >1300	<1 0 0 0 0 0 411 <1111 <1 current <1 0 0 current 290 106 18	<1 0 0 0 441 <1 110 <1 history1 <1 0 <1 history1 436 164 26	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m)	1 400 0 limit/base >15 >20 limit/base >5000 >1300 >160	<1 0 0 0 0 0 411 <1111 <1 current <1 0 current 290 106	<1 0 0 0 0 <1 0 441 <1 110 <1 history1 <1 0 <1 history1 436 164	history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m) METHOD ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	1 400 0 limit/base >15 >20 limit/base >5000 >1300 >160 >40	<1 0 0 0 0 0 411 <1 111 <1 current <1 0 0 current 290 106 18 6	<1 0 0 0 441 <1 110 <1 history1 <1 0 <1 history1 436 164 26 10	history2 history2

Oil Cleanliness


16/15/12

15/14/11

ISO 4406 (c) >19/17/14



OIL ANALYSIS REPORT

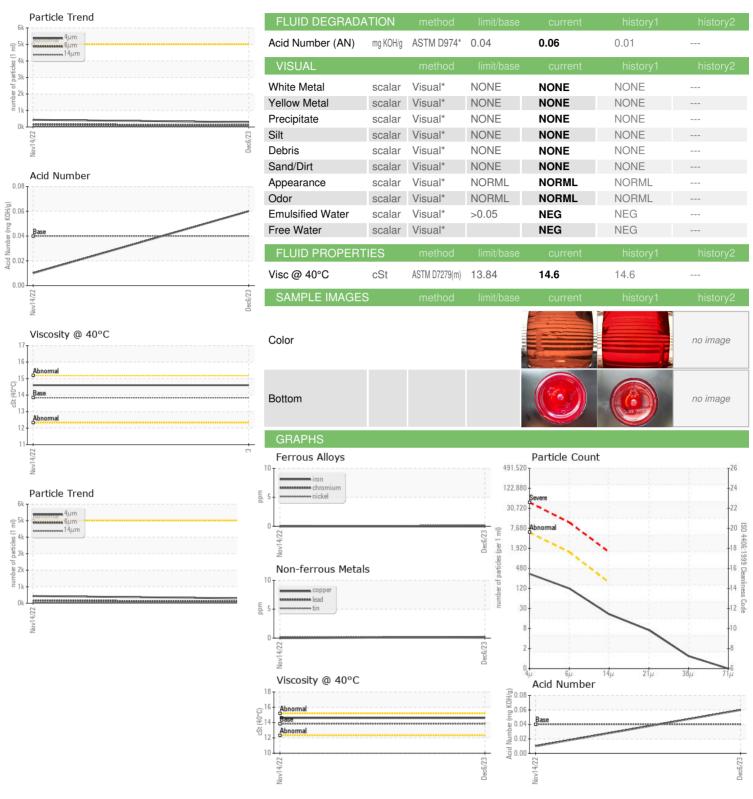



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WC0884136 : 02601530

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Received : 5694615

: 07 Dec 2023 Diagnosed Diagnostician

: 09 Dec 2023 : Kevin Marson

Test Package : IND 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

GLOBAL AEROSPACE 7075 FIR TREE DR. MISSISSAUGA, ON

Contact: Vadym Nechyporenko vadym@globalaerospace.com

T: (905)678-6311 F: (905)678-6312

CA L5S 1J7