




# PROBLEM SUMMARY


Area  
**OLD P1 Line**  
 Machine Id  
**PRESS 1**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (12000 LTR)**

Sample Rating Trend

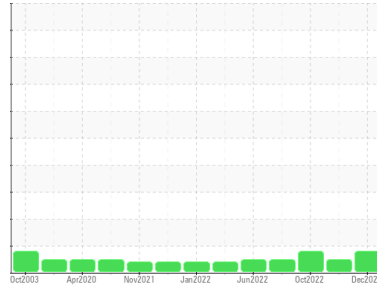

## COMPONENT CONDITION SUMMARY

### ▲ Non-ferrous Metals

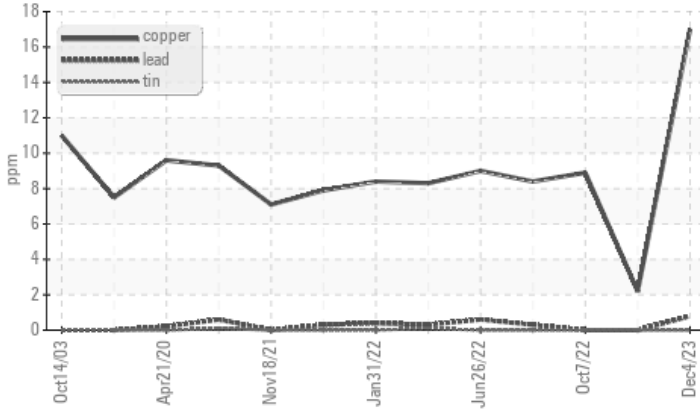

## RECOMMENDATION

We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

## PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	ATTENTION
Copper	ppm ASTM D5185(m) >20	▲ 17	2	9

Customer Id: INDMIS  
 Sample No.: WC  
 Lab Number: 02601589  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Contact Required	---	---	?	Please contact your representative for information regarding the proper sampling kits for your service.
Alert	---	---	?	NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

## HISTORICAL DIAGNOSIS

NORMAL



### 17 Jan 2023 Diag: Bill Quesnel

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. All component wear rates are normal. The wear metal levels do not reflect the reported failure. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed).

view report



ISO



### 07 Oct 2022 Diag: Wes Davis

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed).

view report



NORMAL



### 18 Aug 2022 Diag: Kevin Marson

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. Component wear rates appear to be normal (unconfirmed). The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed).


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

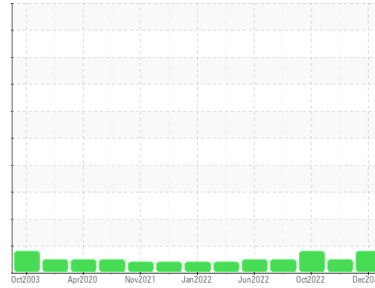

**WEAR**



Area  
**OLD P1 Line**  
 Machine Id  
**PRESS 1**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (12000 LTR)**

## DIAGNOSIS

### ▲ Recommendation

We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

### ▲ Wear

Copper ppm levels are abnormal. A sharp increase in the copper level is noted. Oil cooler core leaching or motor piston wear is indicated.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed).

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC</b>	WC	WC
Sample Date	Client Info	<b>04 Dec 2023</b>	17 Jan 2023	07 Oct 2022
Machine Age	mths Client Info	<b>0</b>	0	0
Oil Age	mths Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	<b>2</b>	1	5
Chromium	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185(m) >20	<b>0</b>	0	<1
Lead	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185(m) >20	<b>▲ 17</b>	2	9
Tin	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES






method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 5	<b>&lt;1</b>	<1	<1
Barium	ppm ASTM D5185(m) 5	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185(m) 5	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m) 25	<b>&lt;1</b>	<1	<1
Calcium	ppm ASTM D5185(m) 200	<b>60</b>	59	59
Phosphorus	ppm ASTM D5185(m) 300	<b>325</b>	363	350
Zinc	ppm ASTM D5185(m) 370	<b>413</b>	421	399
Sulfur	ppm ASTM D5185(m) 2500	<b>724</b>	778	740
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<b>0</b>	0	0
Sodium	ppm ASTM D5185(m)	<b>&lt;1</b>	0	2
Potassium	ppm ASTM D5185(m) >20	<b>2</b>	<1	<1

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>1935</b>	3790	▲ 7736
Particles >6µm	ASTM D7647 >1300	<b>257</b>	835	566
Particles >14µm	ASTM D7647 >160	<b>11</b>	48	12
Particles >21µm	ASTM D7647 >40	<b>2</b>	10	2
Particles >38µm	ASTM D7647 >10	<b>1</b>	0	1
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>18/15/11</b>	19/17/13	▲ 20/16/11

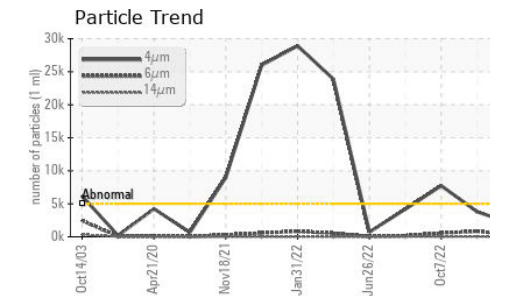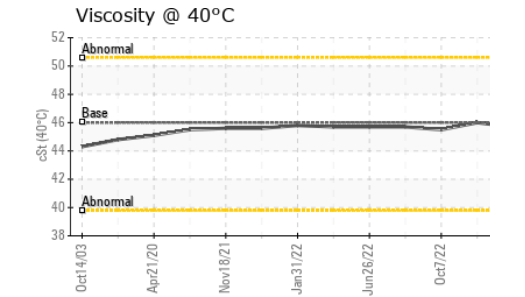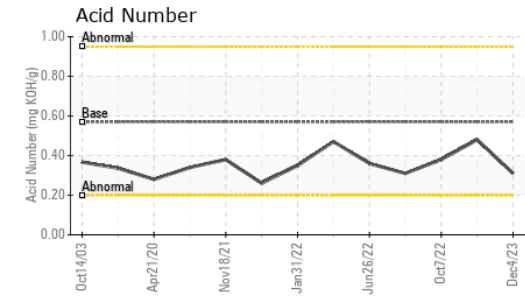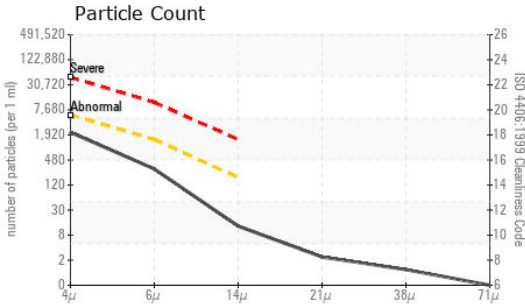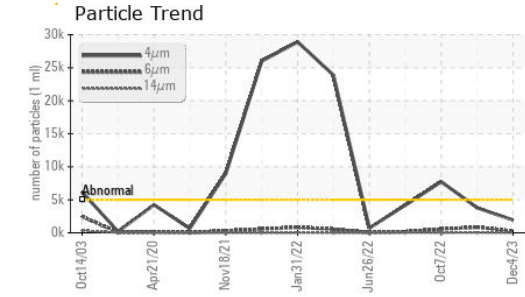


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	<b>0.31</b>	0.48	0.38



VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	46	<b>45.7</b>	46.0	45.5

### SAMPLE IMAGES

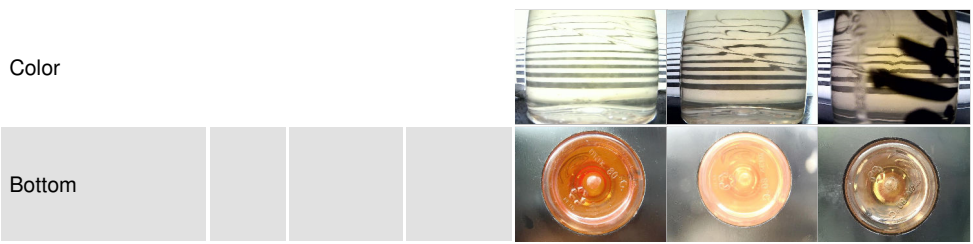

### GRAPHS

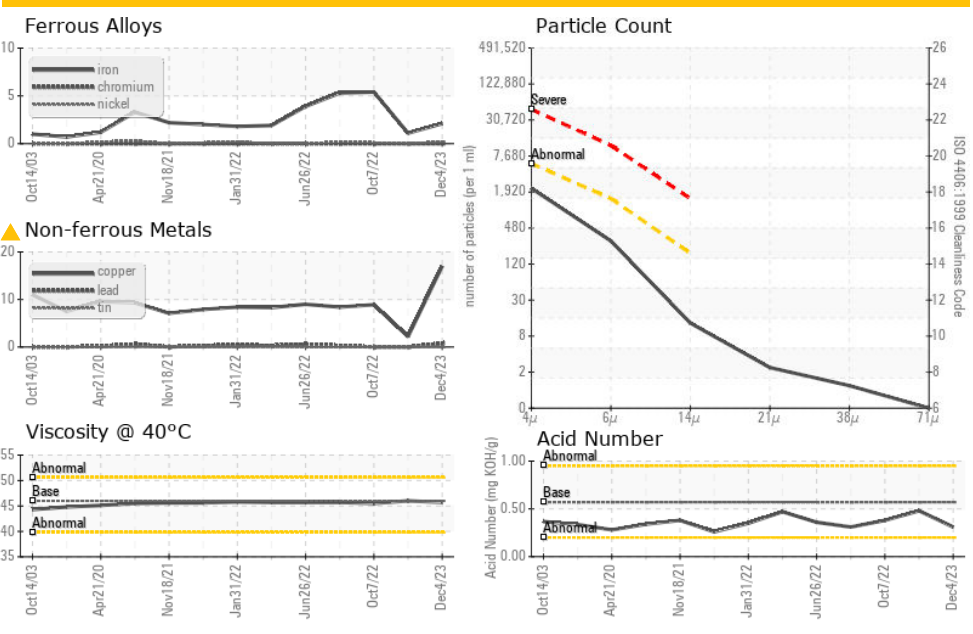

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02601589  
**Unique Number** : 5694674  
**Test Package** : IND 2

**Hydro Extrusion North**  
 5675 Kennedy Road  
 Mississauga, ON  
 CA L4Z 2H9  
 Contact: Harsh Murria  
 Harsh.murria@hydro.com  
 T: (819)462-0479  
 F: (866)462-6478

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.