

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



T001402 (S/N 23-M-09-2564)

Hydraulic System

PETRO CANADA HYDREX XV ALL SEASON H

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The condition of the oil is acceptable for the time in service.

/DRAULIC OIL (-	GAL)			Nov2023		
SAMPLE INFOR	MATION	method	limit/base		hiotory1	hiotory?
	WATION		IIIIII/Dase	current	history1	history2
Sample Number		Client Info		WC0832182		
Sample Date		Client Info		23 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	0	<1		
Calcium	ppm	ASTM D5185(m)	100	~ .		
Phosphorus				105		
		()		105 672		
	ppm	ASTM D5185(m)	670	672		
Zinc	ppm	ASTM D5185(m) ASTM D5185(m)	670 850	672 881		
Zinc Sulfur	ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	670	672 881 1589		
Zinc Sulfur Lithium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	670 850 1600	672 881 1589 <1		
Zinc Sulfur Lithium CONTAMINANT	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method	670 850 1600	672 881 1589 <1	 history1	 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m)	670 850 1600	672 881 1589 <1 current	 history1	 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	670 850 1600 limit/base >15	672 881 1589 <1 current <1	 history1	 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m)	670 850 1600	672 881 1589 <1 current	 history1	 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	670 850 1600 limit/base >15	672 881 1589 <1 current <1	 history1 	 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLII	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	670 850 1600 limit/base >15	672 881 1589 <1 current <1 <1	 history1 	 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLII Particles >4µm	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	670 850 1600 limit/base >15 >20 limit/base	672 881 1589 <1 current <1 <1 <1 <1	 history1 history1	 history2 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLII Particles >4µm Particles >6µm	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	670 850 1600 limit/base >15 >20 limit/base >5000	672 881 1589 <1 current <1 <1 <1 current	history1 history1	history2 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLII Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) MASTM D5185(m) ASTM D7647 ASTM D7647	670 850 1600 limit/base >15 >20 limit/base >5000 >1300 >160	672 881 1589 <1 current <1 <1 <1 current 2127 449	history1 history1 history1	history2 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLI Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	670 850 1600 limit/base >15 >20 limit/base >5000 >1300 >160	672 881 1589 <1 current <1 <1 <1 current 2127 449 24	history1 history1	history2 history2
Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	670 850 1600 limit/base >15 >20 limit/base >5000 >1300 >160 >40	672 881 1589 <1 current <1 <1 <1 current 2127 449 24 4	history1 history1	history2 history2



OIL ANALYSIS REPORT

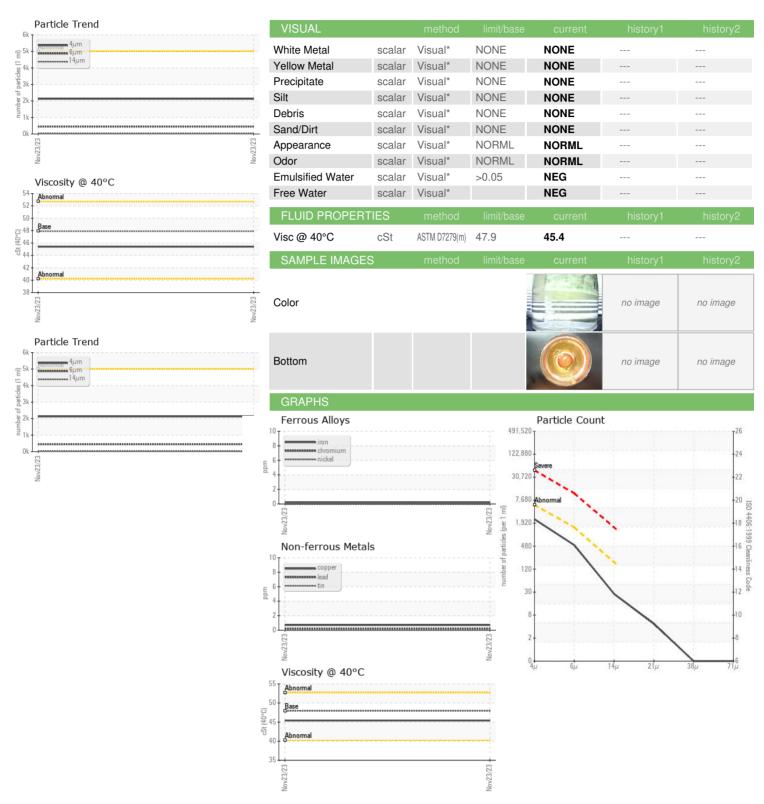



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number

: WC0832182 : 02601594 : 5694679 Test Package : MOB 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received Diagnosed

: 07 Dec 2023 : 08 Dec 2023

: Wes Davis Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

RWF Industries 873 Devonshire Ave. Woodstock, ON **CA N4S 8Z4** Contact: Tami Arnold

tamia@rwfbron.com T:

F: (519)421-0028

Contact/Location: Tami Arnold - RWFWOO