


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Wachine Id V411201B FWP B GEN LUBE OIL TANK

Tank Lube System

MOBIL DTE OIL MEDIUM (--- GAL)

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORI	MATION	method				history2
Sample Number		Client Info		PP13932690	PP13852824	PP13796084
Sample Date		Client Info		25 Nov 2023	13 Apr 2023	06 Nov 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	historv1	history2

CONTAMINATIO	Л	memou			riistory i	HISTOLYZ
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	<1	<1
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	0	0
Aluminum	ppm	ASTM D5185(m)	>10	0	0	<1
Lead	ppm	ASTM D5185(m)	>20	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>20	32	30	30
Tin	ppm	ASTM D5185(m)	>10	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2

ADDITIVES		method	limit/base		history1	history2
Boron	ppm	ASTM D5185(m)		<1	0	0
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		3	2	2
Calcium	ppm	ASTM D5185(m)		4	2	2
Phosphorus	ppm	ASTM D5185(m)		95	103	102
Zinc	ppm	ASTM D5185(m)		105	100	100
Sulfur	ppm	ASTM D5185(m)		1320	1216	1244
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINANTS	;	method	limit/base	current	history1	history2


CONTAMINANT	S	method				history2
Silicon	ppm	ASTM D5185(m)	>15	4	4	4
Sodium	ppm	ASTM D5185(m)		0	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	1096	246	1595
Particles >6µm	ASTM D7647	>1300	317	54	406
Particles >14μm	ASTM D7647	>160	31	3	35
Particles >21µm	ASTM D7647	>40	6	1	11
Particles >38μm	ASTM D7647	>10	0	0	1
Particles >71μm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/15/12	15/13/9	18/16/12

Contact/Location: Liam Maher - EXXSTJ



OIL ANALYSIS REPORT

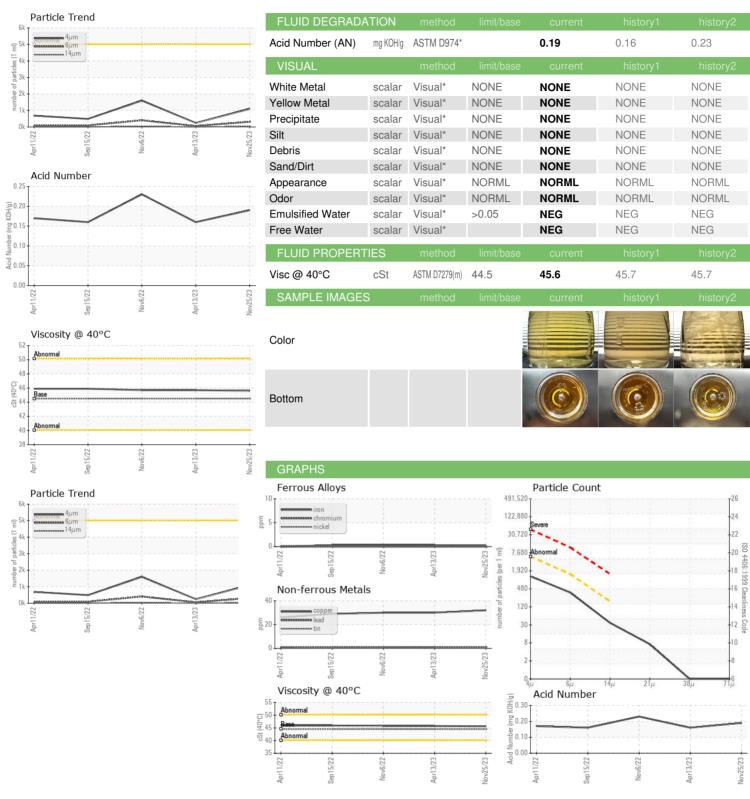



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 02601689 : 5694774

: PP13932690

Received Diagnosed

: 07 Dec 2023 Diagnostician

: 08 Dec 2023 : Kevin Marson

Test Package : MAR 2 (Additional Tests: TAN Man) To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

ExxonMobil Canada East Ltd.

Hebron-Materials and Repair Coordin, Suite 1000, 100 New Gow St. John's, NL **CA A1C 6K3** Contact: Liam Maher

liam.m.maher@exxonmobil.com T: (709)273-3729

F: