




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

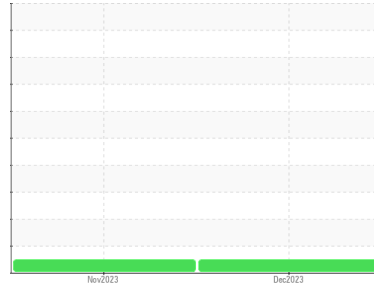

Area  
**[4352]**  
 Machine Id  
**11-041-CD**  
 Component  
**New (Unused) Oil**  
 Fluid  
**PETRO CANADA LUMINOL TRI (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

### Wear

{not applicable}

### Contamination

{not applicable}

### Fluid Condition

Pour Point = -63°C.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PP0000862</b>	PP0000859	---
Sample Date	Client Info			<b>06 Dec 2023</b>	30 Nov 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Lead	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	---
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Calcium	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Zinc	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	---
Sulfur	ppm	ASTM D5185(m)	10	<b>1</b>	<1	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>0</b>	0	---
Sodium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---



# OIL ANALYSIS REPORT

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Pour Point	°C	ASTM D97*	-60	<b>-63</b>	-54	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image
Bottom					no image

## GRAPHS



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PP0000862      **Received** : 07 Dec 2023  
**Lab Number** : **02601733**      **Diagnosed** : 08 Dec 2023  
**Unique Number** : 5694818      **Diagnostician** : Kevin Marson  
**Test Package** : TEST ( Additional Tests: ICP, PourPt, Visual )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Oleo Energies**  
 5800 Thorold Stone Road  
 Niagara Falls, ON  
 CA L2J 1A2  
 Contact: Mark Michalkoff  
 mmichalkoff@oleoenergies.com  
 T: (905)358-5133  
 F: