




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

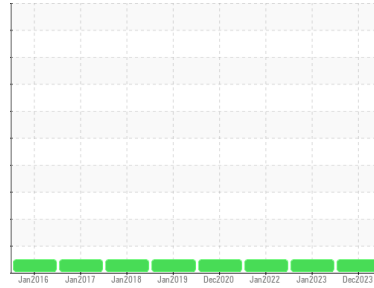

Area
(N888XT)
Machine Id
[N888XT] EXTRA EA800LT L-298-79E
Component
Piston Aircraft Engine
Fluid
SHELL AEROSHELL W 100 (16 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0566092	WC0566095	WC0566098
Sample Date	Client Info		06 Dec 2023	23 Jan 2023	24 Jan 2022
TSN	hrs	Client Info	179	175	168
TSO	hrs	Client Info	0	175	168
Oil Age	hrs	Client Info	4	7	10
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	8	10	7
Chromium	ppm	ASTM D5185(m)	>20	1	2	1
Nickel	ppm	ASTM D5185(m)	>15	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>25	4	4	4
Lead	ppm	ASTM D5185(m)	>20000	667	928	1314
Copper	ppm	ASTM D5185(m)	>25	6	7	7
Tin	ppm	ASTM D5185(m)	>30	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		5	7	9

ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<1	<1	2
Barium	ppm	ASTM D5185(m)	0	<1	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	0	5	3	15
Calcium	ppm	ASTM D5185(m)	0	6	11	119
Phosphorus	ppm	ASTM D5185(m)	0	1166	1306	1368
Zinc	ppm	ASTM D5185(m)	0	6	5	24
Sulfur	ppm	ASTM D5185(m)	3800	2850	4067	4754
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	4	4	6
Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1






OIL ANALYSIS REPORT

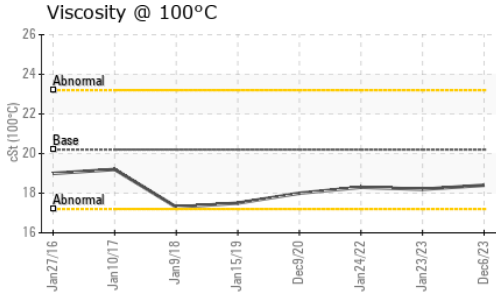

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	20.2	18.4	18.2	18.3

GRAPHS

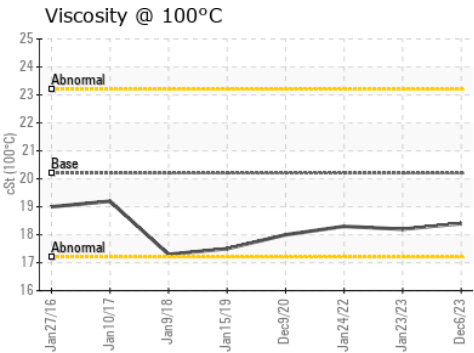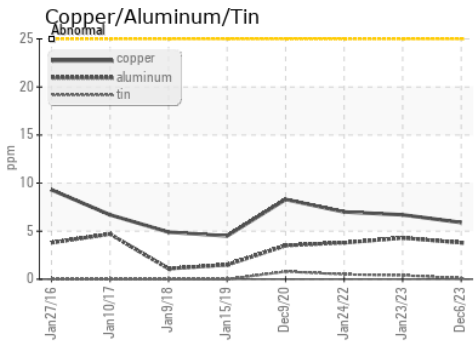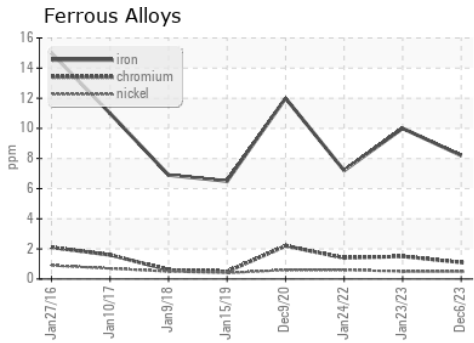

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 7088302 CANADA INC - VINTECH AERO
Sample No. : WC0566092 **Received** : 08 Dec 2023 1699 ARTHUR-FECTEAU ST.
Lab Number : 02601821 **Diagnosed** : 08 Dec 2023 GATINEAU, QC
Unique Number : 5694906 **Diagnostician** : Kevin Marson CA J8R 2Z9
Test Package : AVI 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Andre Laviolette
 andre@vintechaero.ca
 T: (819)669-9603 x:239
 F: (819)669-9608