


#### Area IPEX - 888063 Machine Id AM948

Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 46 (--- GAL)

## COMPONENT CONDITION SUMMARY

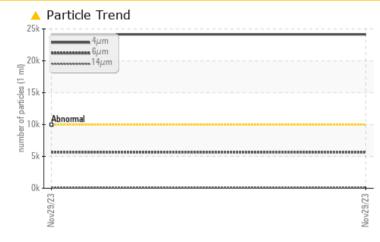

#### RECOMMENDATION

This is a baseline read-out on the submitted sample.

PROBLEMATIC T	EST RESULTS			
Sample Status			ABNORMAL	 
Particles >4µm	ASTM D7647	>10000	<u> </u>	 
Particles >6µm	ASTM D7647	>2500	<u> </u>	 
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<u> </u>	 


Customer Id: CHECOB Sample No.: E30000887 Lab Number: 02601844 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Tatiana Sorkina +1 (800)263-3939 tsorkina@e360s.ca

*To change component or sample information:* Gloria Gonzalez +1 (289)291-4643 x4643 gloria.gonzalez@wearcheck.com

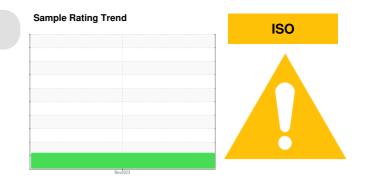

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

#### Area IPEX - 888063 Machine Id AM948

Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 46 (--- GAL)

## DIAGNOSIS

A Recommendation

This is a baseline read-out on the submitted sample.

# Wear

{not applicable}

## Contamination

Particles  $>4\mu m$  are abnormally high. Particles  $>6\mu m$  and oil cleanliness are abnormally high.

#### Fluid Condition

{not applicable}


		<u> </u>		Nov2023		
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Batch #		Client Info		AM948		
Machine ID		Client Info		Sales		
Department		Client Info		Machine		
Sample From		Client Info		Initial		
Production Stage		Client Info		12/06/2023		
Sample Number		Client Info		E30000887		
Sample Date		Client Info		29 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	4		
Barium	ppm	ASTM D5185(m)	5	<1		
Molybdenum	ppm	ASTM D5185(m)	5	<1		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	25	11		
Calcium	ppm	ASTM D5185(m)	200	144		
Phosphorus	ppm	ASTM D5185(m)	300	337		
Zinc	ppm	ASTM D5185(m)		436		
Sulfur	ppm	ASTM D5185(m)	2500	853		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)	00	0		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*	>0.05	0.002		
ppm Water	ppm	ASTM D6304*	>500	25		


# Sample Rating Trend


ISO



# **OIL ANALYSIS REPORT**

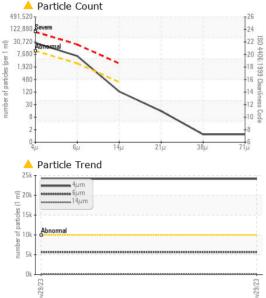

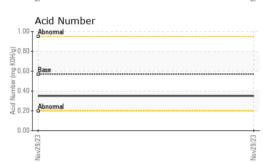

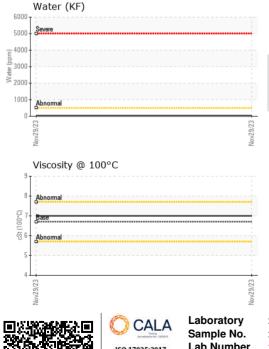

	FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
P	Particles >4µm		ASTM D7647	>10000	<u> </u>		
P	Particles >6µm		ASTM D7647	>2500	<u> </u>		
P	Particles >14µm		ASTM D7647	>320	113		
P	Particles >21µm		ASTM D7647	>80	13		
	Particles >38µm		ASTM D7647	>20	1		
	Particles >71µm		ASTM D7647		1		
C	Dil Cleanliness		ISO 4406 (c)	>20/18/15	<u> </u>		
	FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A	Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.35		
	VISUAL		method	limit/base	current	history1	history2
V	Vhite Metal	scalar	Visual*	NONE	NONE		
Y	ellow Metal	scalar	Visual*	NONE	NONE		
P	Precipitate	scalar	Visual*	NONE	NONE		
S	Silt	scalar	Visual*	NONE	NONE		
C	Debris	scalar	Visual*	NONE	NONE		
	Sand/Dirt	scalar	Visual*	NONE	NONE		
	ppearance	scalar	Visual*	NORML	NORML		
	Ddor	scalar	Visual*	NORML	NORML		
E	Emulsified Water	scalar	Visual*	>0.05	NEG		
F	ree Water	scalar	Visual*		NEG		
F	ree Water	scalar	Visual* method	limit/base	NEG current	 history1	 history2
		scalar		limit/base 46			
V	FLUID PROPERT	scalar IES	method		current	history1	history2
V	FLUID PROPERT /isc @ 40°C	scalar IES cSt	method ASTM D7279(m)	46 6.7	current 43.1	history1	history2
V	FLUID PROPERT /isc @ 40°C /isc @ 100°C	scalar IES cSt cSt Scale	method ASTM D7279(m) ASTM D7279(m)	46 6.7	current 43.1 7	history1 	history2 
VVVV	FLUID PROPERT /isc @ 40°C /isc @ 100°C /iscosity Index (VI)	scalar IES cSt cSt Scale	method ASTM D7279(m) ASTM D7279(m) ASTM D2270*	46 6.7 97	current 43.1 7 121	history1  	history2  

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Environmental 360 Solutions Ltd. : E30000887 Received : 08 Dec 2023 640 Victoria Street Lab Number : 02601844 Diagnosed : 12 Dec 2023 Cobourg, ON ISO 17025:2017 Accredited Laboratory Unique Number : 5694929 Diagnostician : Tatiana Sorkina CA K9A 5H5 Test Package : IND 2 (Additional Tests: KF, KV100, VI) Contact: Jake Debruyn To discuss this sample report, contact Customer Service at 1-905-372-2251. jdebruyn@e360s.ca Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T: Validity of results and interpretation are based on the sample and information as supplied. F: (905)373-4950