




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

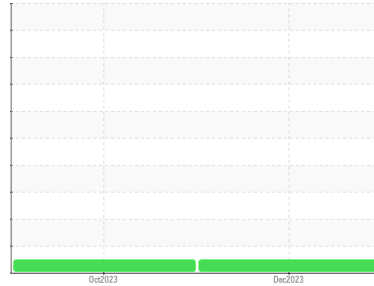

Machine Id  
**70009**

Component  
**Hoist**

Fluid  
**HITACHI SUPER EH56HBW (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0876935</b>	WC0876937	---
Sample Date	Client Info			<b>05 Dec 2023</b>	16 Oct 2023	---
Machine Age	hrs	Client Info		<b>3</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<b>3</b>	2	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	---
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>1</b>	1	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185(m)		<b>575</b>	572	---
Calcium	ppm	ASTM D5185(m)		<b>2861</b>	2835	---
Phosphorus	ppm	ASTM D5185(m)		<b>1006</b>	1050	---
Zinc	ppm	ASTM D5185(m)		<b>1167</b>	1163	---
Sulfur	ppm	ASTM D5185(m)		<b>3631</b>	3588	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>10</b>	10	---
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>40000	<b>21503</b>	521	---
Particles >6µm		ASTM D7647	>10000	<b>2905</b>	70	---
Particles >14µm		ASTM D7647	>80	<b>38</b>	6	---
Particles >21µm		ASTM D7647	>20	<b>8</b>	3	---
Particles >38µm		ASTM D7647	>4	<b>2</b>	1	---
Particles >71µm		ASTM D7647	>3	<b>1</b>	1	---
Oil Cleanliness		ISO 4406 (c)	>22/20/13	<b>22/19/12</b>	16/13/10	---



# OIL ANALYSIS REPORT

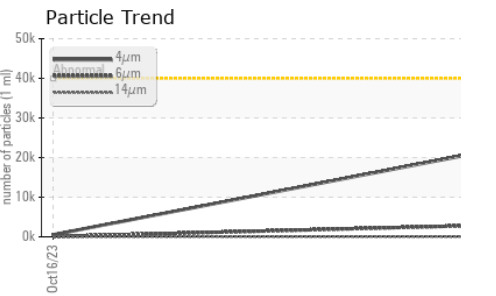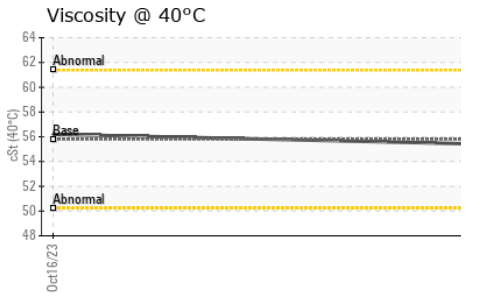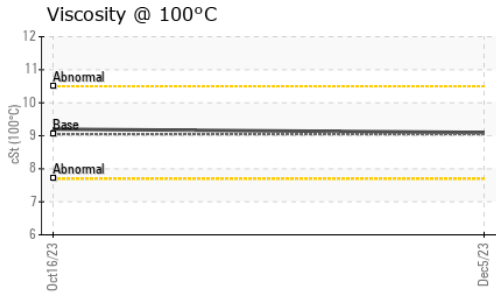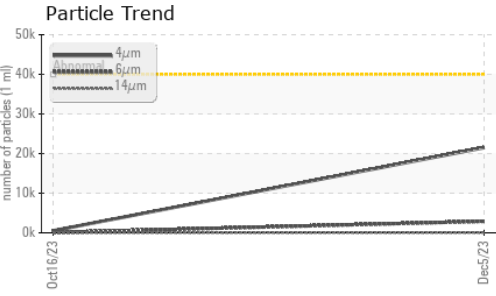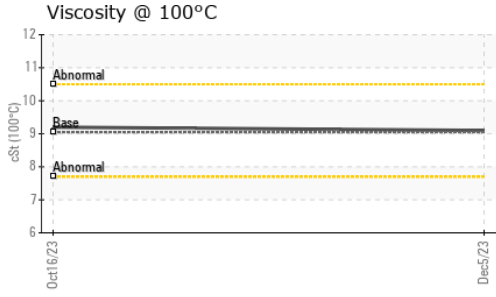





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	2.6	<b>2.26</b>	2.28	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	55.8	<b>55.4</b>	56.2	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.05	<b>9.1</b>	9.2	---
Viscosity Index (VI)	Scale	ASTM D2270*	142	<b>144</b>	144	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						no image
Bottom						no image

## GRAPHS

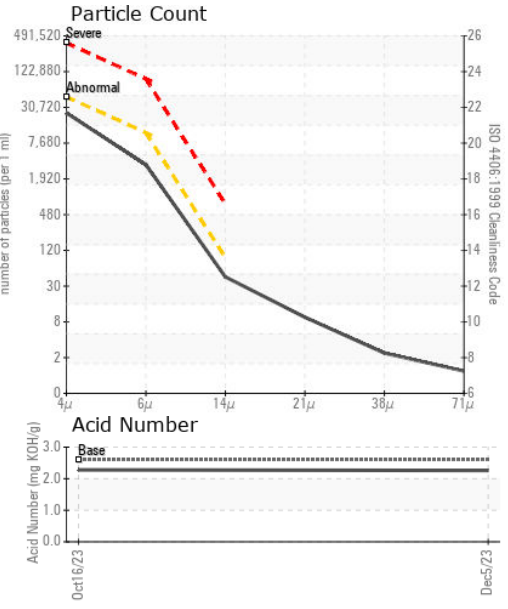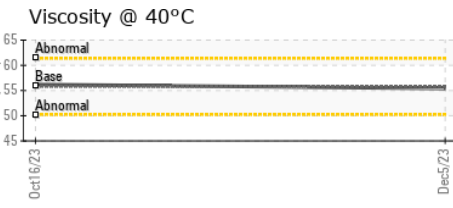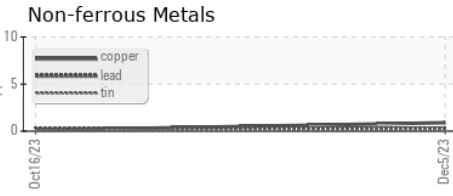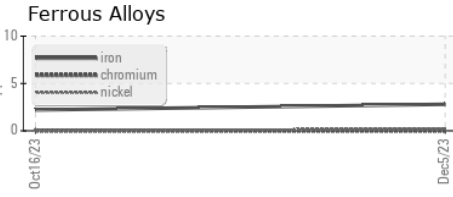

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **HITACHI TRUCK MANUFACTURING**  
**Sample No.** : WC0876935 **Received** : 08 Dec 2023 **200 WOODLAWN ROAD WEST**  
**Lab Number** : **02601861** **Diagnosed** : 09 Dec 2023 **GUELPH, ON**  
**Unique Number** : 5694946 **Diagnostician** : Wes Davis **CA N1H 1B6**  
**Test Package** : IND 2 ( Additional Tests: KV100, VI ) **Contact: Cal Banman**  
**2023** **cbanman@hitachitruck.com**

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**T: (519)826-5593**  
**F: (519)826-5545**