



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[42415052]
 Machine Id
9503
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)



DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 Metal levels are typical for a new component breaking in.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0853291	---	---
Sample Date	Client Info		03 Dec 2023	---	---
Machine Age	kms	Client Info	21470	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >90	80	---	---
Chromium	ppm	ASTM D5185(m) >20	2	---	---
Nickel	ppm	ASTM D5185(m) >2	<1	---	---
Titanium	ppm	ASTM D5185(m) >2	0	---	---
Silver	ppm	ASTM D5185(m) >2	<1	---	---
Aluminum	ppm	ASTM D5185(m) >20	3	---	---
Lead	ppm	ASTM D5185(m) >40	2	---	---
Copper	ppm	ASTM D5185(m) >330	2	---	---
Tin	ppm	ASTM D5185(m) >15	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	50	---	---
Barium	ppm	ASTM D5185(m) 10	0	---	---
Molybdenum	ppm	ASTM D5185(m) 100	2	---	---
Manganese	ppm	ASTM D5185(m)	<1	---	---
Magnesium	ppm	ASTM D5185(m) 450	731	---	---
Calcium	ppm	ASTM D5185(m) 3000	1357	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	705	---	---
Zinc	ppm	ASTM D5185(m) 1350	791	---	---
Sulfur	ppm	ASTM D5185(m) 4250	2516	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	5	---	---
Sodium	ppm	ASTM D5185(m)	3	---	---
Potassium	ppm	ASTM D5185(m) >20	8	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >6	0.2	---	---
Nitration	Abs/cm	ASTM D7624* >20	10.2	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	20.7	---	---



OIL ANALYSIS REPORT








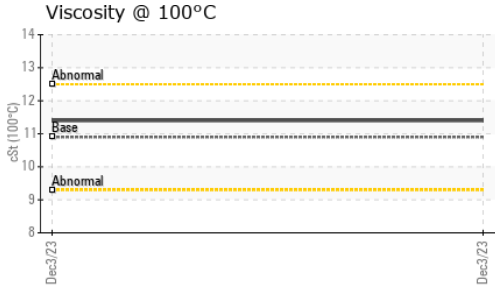


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	16.3	---	---

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.4	---	---

GRAPHS

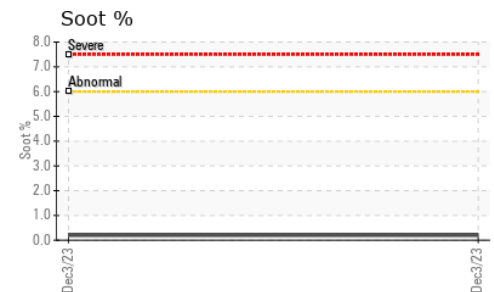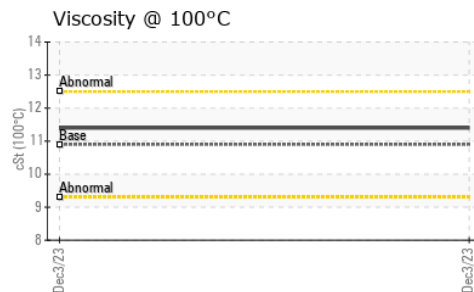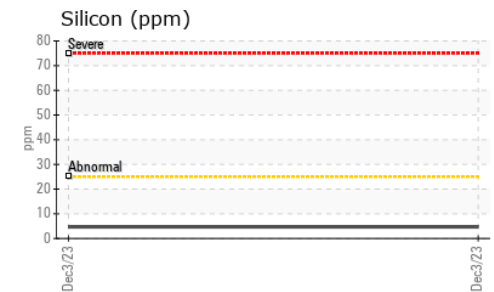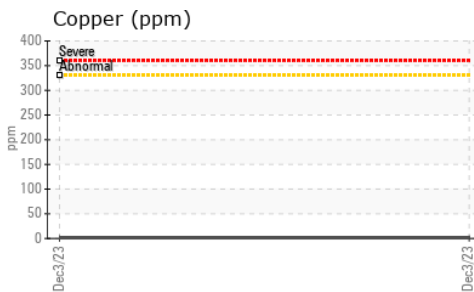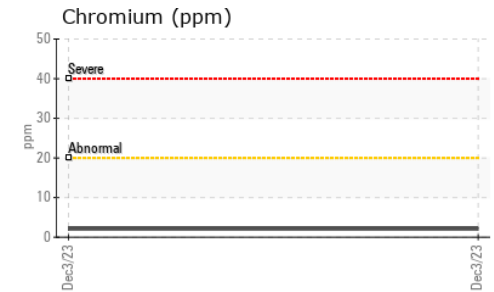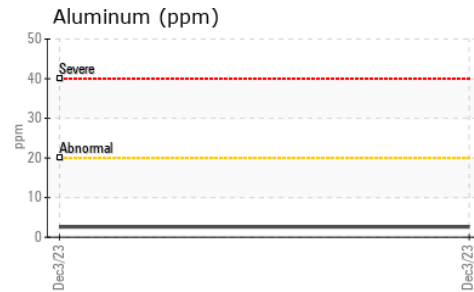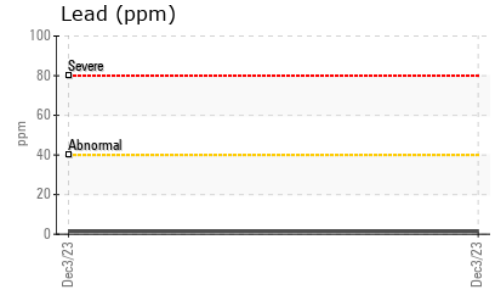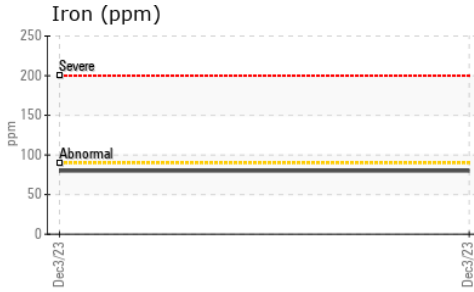

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0853291 **Received** : 11 Dec 2023
Lab Number : **02602108** **Diagnosed** : 11 Dec 2023
Unique Number : 5695193 **Diagnostician** : Wes Davis
Test Package : MOB 1

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.