


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



# Hardinge Lathe(TBD) #253 cc4032-TBD

**Hydraulic System** 

AW HYDRAULIC OIL ISO 32 (--- GAL)

### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Apr2017 Se	p2017 Mar2018 Sep	2018 Oct2020 Jul2022	JUI2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0887625	WC0837832	WC0768388
Sample Date		Client Info		10 Dec 2023	10 Jul 2023	05 Dec 2022
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	<1	<1
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	0	0	0
Lead	ppm	ASTM D5185(m)	>20	<1	<1	2
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185(m)	limit/base	current	history1	history2 <1
	ppm				· ·	•
Boron		ASTM D5185(m)	5	<1	<1	<1
Boron Barium	ppm	ASTM D5185(m) ASTM D5185(m)	5 5	<1 <1	<1 0	<1
Boron Barium Molybdenum	ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5 5	<1 <1 0	<1 0 0	<1 0 0
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5 5 5	<1 <1 0	<1 0 0 0	<1 0 0 0
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5 5 5 25	<1 <1 0 0 <1	<1 0 0 0 0 <1	<1 0 0 0 0 <1
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200	<1 <1 0 0 <1 44	<1 0 0 0 0 <1 46	<1 0 0 0 0 <1 44
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300	<1 <1 0 0 <1 44 323	<1 0 0 0 0 <1 46 358	<1 0 0 0 0 <1 44 355
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370	<1 <1 0 0 0 <1 44 323 407	<1 0 0 0 0 <1 46 358 412	<1 0 0 0 0 <1 44 355 402
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370	<1 <1 0 0 <1 44 323 407 1757	<1 0 0 0 0 <1 46 358 412 1782	<1 0 0 0 0 <1 44 355 402 1856
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370 2500	<1 <1 0 0 <1 44 323 407 1757 <1	<1 0 0 0 <1 46 358 412 1782 <1	<1 0 0 0 <1 44 355 402 1856 <1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370 2500	<1 <1 0 0 <1 44 323 407 1757 <1 current	<1 0 0 0 0 <1 46 358 412 1782 <1	<1 0 0 0 0 <1 44 355 402 1856 <1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370 2500	<1 <1 0 0 <1 44 323 407 1757 <1 current	<1 0 0 0 0 <1 46 358 412 1782 <1 history1	<1 0 0 0 <1 44 355 402 1856 <1 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370 2500 limit/base >15	<1 <1 0 0 <1 44 323 407 1757 <1 current 1 <1	<1 0 0 0 <1 46 358 412 1782 <1 history1 <1	<1 0 0 0 <1 44 355 402 1856 <1 history2 <1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370 2500 limit/base >15 >20	<1 <1 0 0 <1 44 323 407 1757 <1  current 1 <1 0	<1 0 0 0 <1 46 358 412 1782 <1 history1 <1 0 <1	<1 0 0 0 0 <1 44 355 402 1856 <1 history2 <1 <1 <1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  MASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5 5 5 25 200 300 370 2500 limit/base >15 >20	<1 <1 0 0 0 <1 44 323 407 1757 <1 current 1 <1 0 current	<1 0 0 0 <1 46 358 412 1782 <1 history1 <1 0 <1	<1 0 0 0 <1 44 355 402 1856 <1 history2 <1 <1 <1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 5 5 25 200 300 370 2500 limit/base >15 >20 limit/base >5000	<1 <1 0 0 0 <1 44 323 407 1757 <1 current 1 <1 0 current 572	<1 0 0 0 0 <1 46 358 412 1782 <1 history1 <1 0 <1 history1 364	<1 0 0 0 0 <1 44 355 402 1856 <1 history2 <1 <1 <1 41 42 4355
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  method ASTM D5185(m)	5 5 5 25 200 300 370 2500  limit/base >15 >20 limit/base >5000 >1300 >160	<1 <1 0 0 0 <1 44 323 407 1757 <1 current 1 <1 0 current 572 151	<1 0 0 0 0 <1 46 358 412 1782 <1 history1 <1 0 <1 history1 364 97	<1 0 0 0 0 <1 44 355 402 1856 <1 history2 <1 <1 <1 history2 2461 622
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  MASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D7647 ASTM D7647	5 5 5 25 200 300 370 2500  limit/base >15 >20 limit/base >5000 >1300 >160	<1 <1 0 0 0 <1 44 323 407 1757 <1 current 1 <1 0 current 572 151 8	<1 0 0 0 0 <1 46 358 412 1782 <1 history1 <1 0 <1 history1 364 97 8	<1 0 0 0 0 <1 44 355 402 1856 <1 history2 <1 <1 <1 622 67
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  MASTM D5185(m)  MASTM D5185(m)  MASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	5 5 5 200 300 370 2500  limit/base >15 >20 limit/base >5000 >1300 >160 >40 >10	<1 <1 0 0 0 <1 44 323 407 1757 <1 current 1 <1 0 current 572 151 8 2	<1 0 0 0 0 <1 46 358 412 1782 <1 history1 <1 0 <1 history1 364 97 8 2	<1 0 0 0 0 <1 44 355 402 1856 <1 history2 <1 <1 <1 chiestory2 2461 622 67 27



## OIL ANALYSIS REPORT

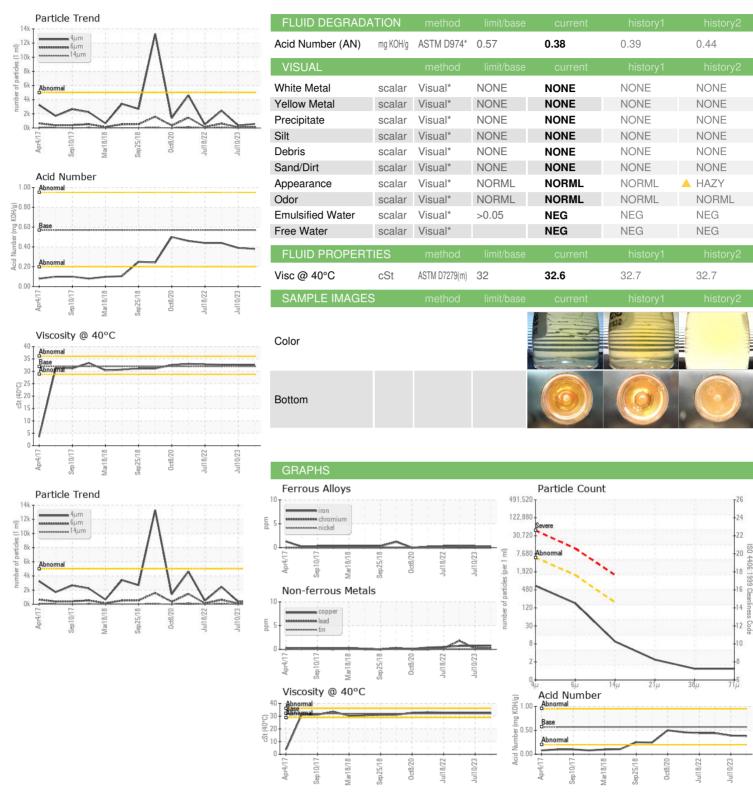





Laboratory Sample No. Lab Number **Unique Number** Test Package

: WC0887625 : 02602260

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 HUSKY INJECTION MOLDING SYSTEMS LTD Received : 11 Dec 2023

Diagnosed : 12 Dec 2023 : Wes Davis Diagnostician

530 QUEEN STREET SOUTH BOLTON, ON

**CA L7E 5S5** Contact: Robert Cameron

rcameron@husky.ca T: (905)951-5000 F: (905)951-5167

: 5695345

: IND 2

Validity of results and interpretation are based on the sample and information as supplied.