




# OIL ANALYSIS REPORT

Sample Rating Trend

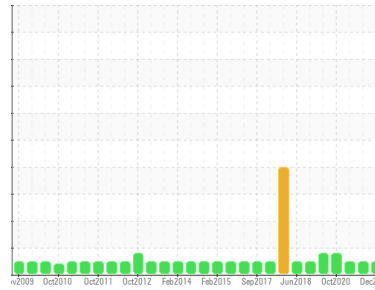

**NORMAL**



Machine Id  
**Okuma Core Roughing Lathe # 248 - cc4034**

Component  
**Hydraulic System**

Fluid  
**FUCHS RENOLIN AW ISO 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0887647</b>	WC0837825	WC0768087
Sample Date	Client Info		<b>10 Dec 2023</b>	10 Jul 2023	05 Dec 2022
Machine Age	days	Client Info	<b>0</b>	0	0
Oil Age	days	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185(m)	>20	<b>4</b>	3	3
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>42</b>	42	43
Phosphorus	ppm	ASTM D5185(m)		<b>326</b>	361	361
Zinc	ppm	ASTM D5185(m)		<b>402</b>	415	409
Sulfur	ppm	ASTM D5185(m)		<b>1977</b>	2026	2005
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>764</b>	996	813
Particles >6µm	ASTM D7647	>1300	<b>172</b>	267	232
Particles >14µm	ASTM D7647	>160	<b>9</b>	20	22
Particles >21µm	ASTM D7647	>40	<b>3</b>	7	5
Particles >38µm	ASTM D7647	>10	<b>1</b>	1	1
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/15/10</b>	17/15/11	17/15/12




# OIL ANALYSIS REPORT


## Particle Trend

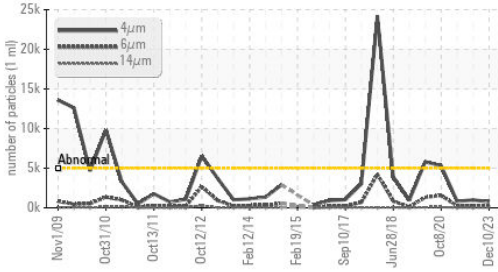


## Acid Number

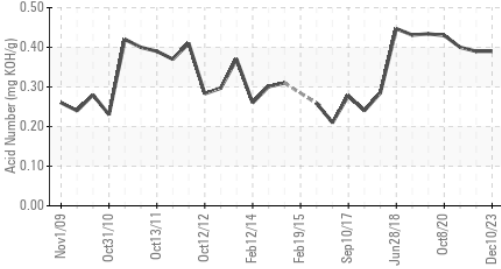

## Viscosity @ 40°C

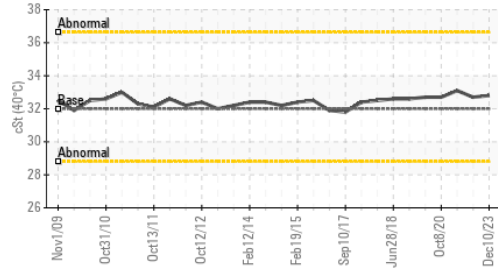

## Particle Trend

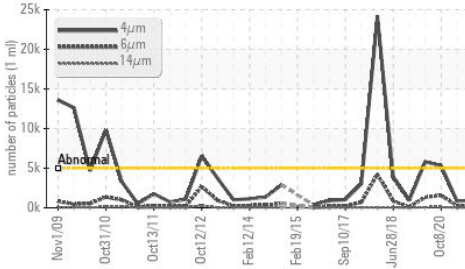


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D974*	<b>0.39</b>	0.39	0.40
White Metal	scalar Visual*	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar Visual*	<b>NONE</b>	NONE	NONE
Precipitate	scalar Visual*	<b>NONE</b>	NONE	NONE
Silt	scalar Visual*	<b>NONE</b>	NONE	NONE
Debris	scalar Visual*	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar Visual*	<b>NONE</b>	NONE	NONE
Appearance	scalar Visual*	<b>NORML</b>	NORML	NORML
Odor	scalar Visual*	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar Visual*	<b>NEG</b>	NEG	NEG
Free Water	scalar Visual*	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 40°C cSt	ASTM D7279(m)	<b>32.8</b>	32.7	33.1

## SAMPLE IMAGES

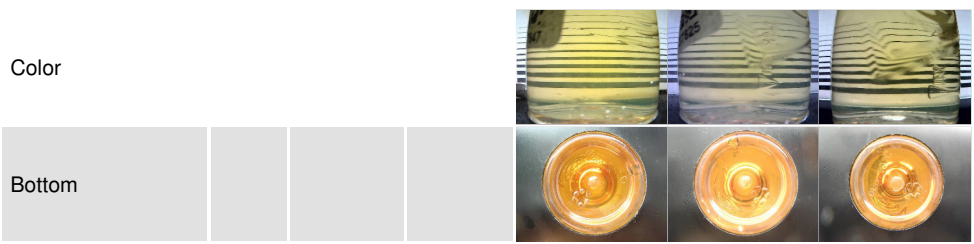


## GRAPHS


### Ferrous Alloys

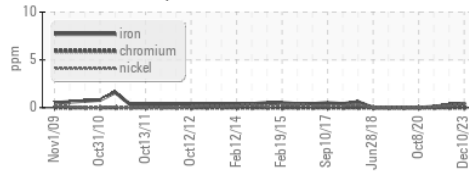


### Non-ferrous Metals

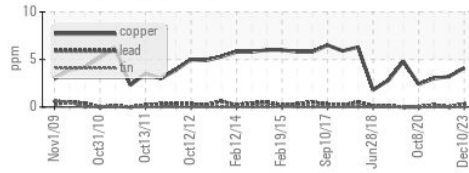


### Viscosity @ 40°C

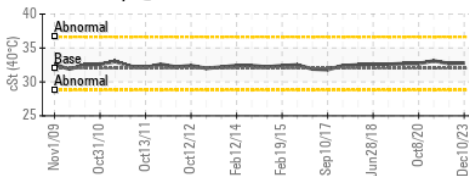

### Particle Count

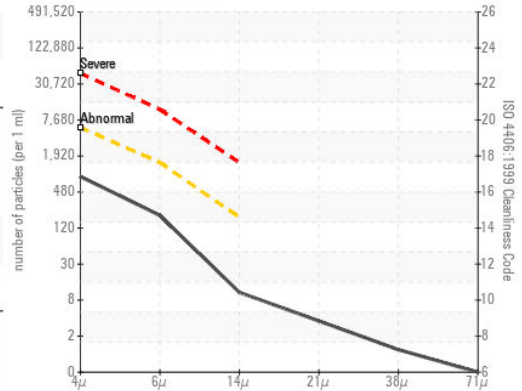

### Acid Number

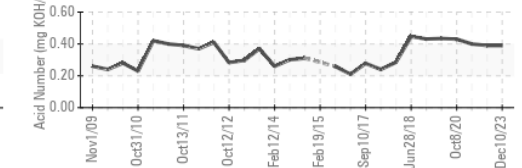

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 HUSKY INJECTION MOLDING SYSTEMS LTD  
**Sample No.** : WC0887647 **Received** : 11 Dec 2023 530 QUEEN STREET SOUTH  
**Lab Number** : 02602287 **Diagnosed** : 12 Dec 2023 BOLTON, ON  
**Unique Number** : 5695372 **Diagnostician** : Wes Davis CA L7E 5S5  
**Test Package** : IND 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Robert Cameron  
 rcameron@husky.ca  
 T: (905)951-5000  
 F: (905)951-5167