




PROBLEM SUMMARY

Sample Rating Trend


VISCOSITY

Area
TC01
Machine Id
TC01 4.5 Inch
Component
Gearbox
Fluid
SHELL OMALA S2 G 320 (40 GAL)

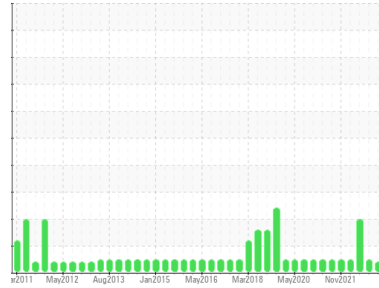

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

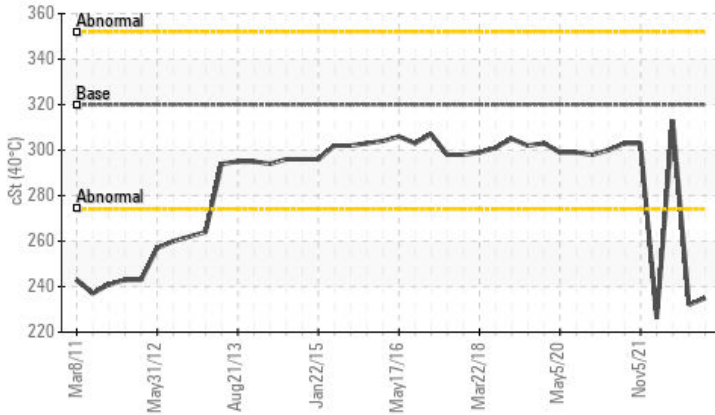

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	ABNORMAL
Visc @ 40°C	cSt	ASTM D7279(m)	320	▲ 235	232	▲ 313

Customer Id: GOONAP
Sample No.: WC0873614
Lab Number: 02602417
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

05 Aug 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



05 Feb 2023 Diag: Kevin Marson

WEAR



We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Iron and nickel ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. There is no indication of any contamination in the oil. Viscosity of sample indicates oil is within ISO 320 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

view report



27 Oct 2022 Diag: Kevin Marson

NORMAL



Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

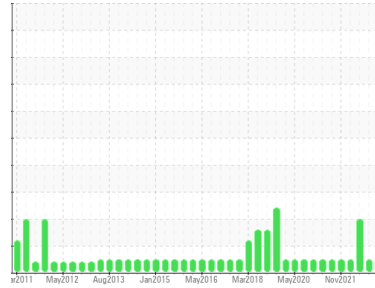

VISCOSITY



Area
TC01
 Machine Id
TC01 4.5 Inch
 Component
Gearbox
 Fluid
SHELL OMALA S2 G 320 (40 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within ISO 220 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0873614	WC0841280	WC0754405
Sample Date	Client Info		05 Nov 2023	05 Aug 2023	05 Feb 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	0	0
Iron	ppm	ASTM D5185(m) >200	183	178	▲ 363
Chromium	ppm	ASTM D5185(m) >15	1	1	2
Nickel	ppm	ASTM D5185(m) >15	4	4	▲ 18
Titanium	ppm	ASTM D5185(m)	0	0	<1
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	1	1	4
Lead	ppm	ASTM D5185(m) >100	<1	<1	2
Copper	ppm	ASTM D5185(m) >200	7	10	36
Tin	ppm	ASTM D5185(m) >25	0	0	0
Antimony	ppm	ASTM D5185(m) >5	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5.5	<1	<1	4
Barium	ppm	ASTM D5185(m) 0.4	<1	<1	0
Molybdenum	ppm	ASTM D5185(m) 0.5	64	66	151
Manganese	ppm	ASTM D5185(m)	1	1	5
Magnesium	ppm	ASTM D5185(m) 23	<1	<1	2
Calcium	ppm	ASTM D5185(m) 13	11	10	27
Phosphorus	ppm	ASTM D5185(m) 450	252	298	375
Zinc	ppm	ASTM D5185(m) 9.9	61	64	220
Sulfur	ppm	ASTM D5185(m) 8181	8779	9125	9033
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	4	5	8
Sodium	ppm	ASTM D5185(m)	4	3	8
Potassium	ppm	ASTM D5185(m) >20	10	11	6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.35	0.33	0.70




OIL ANALYSIS REPORT

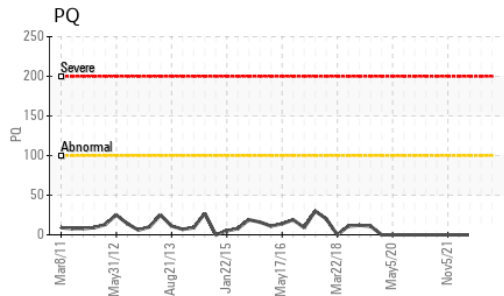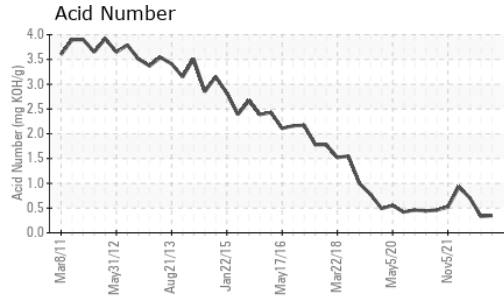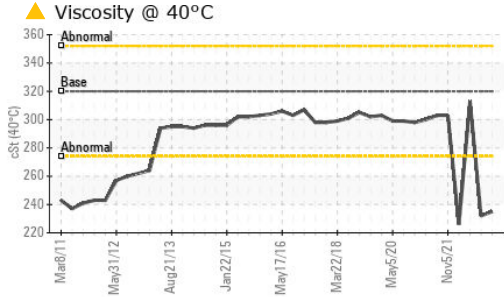






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	320 ▲ 235	232	▲ 313

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

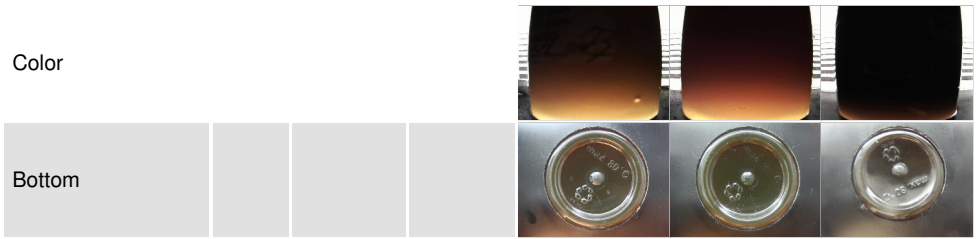

GRAPHS

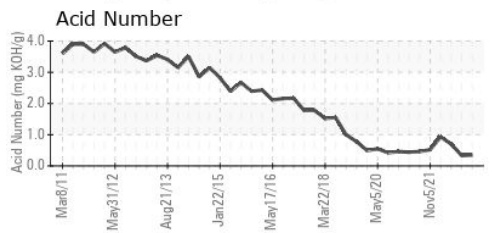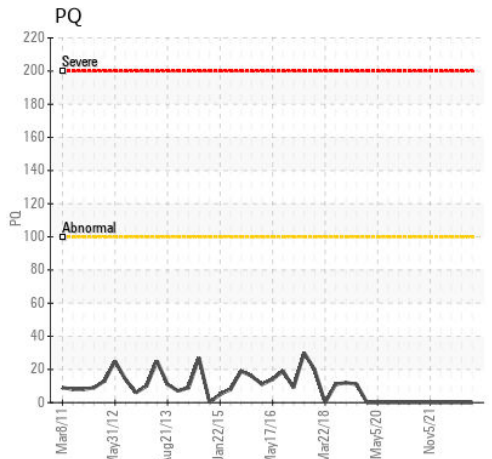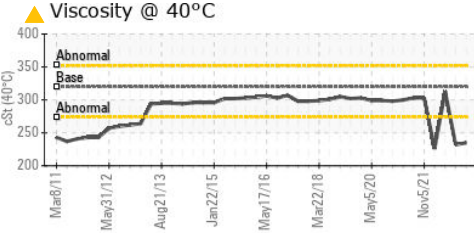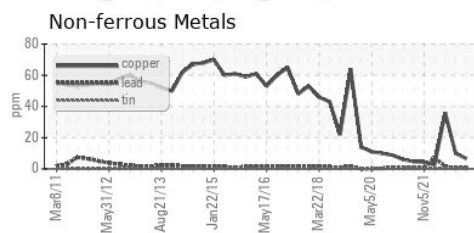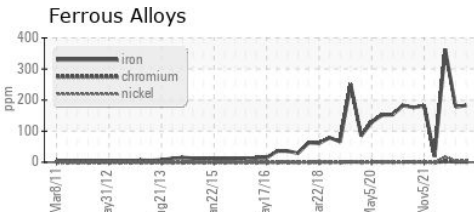

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0873614 **Received** : 11 Dec 2023
Lab Number : 02602417 **Diagnosed** : 12 Dec 2023
Unique Number : 5695502 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: TAN Man)

Goodyear Napanee
 388 Goodyear Road
 Napanee, ON
 CA K7R 3L2
 Contact: Grant Cinnamon
 grant_cinnamon@goodyear.com
 T:
 F: (613)354-9377

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.